VISIT…

More Math Into LaTeX

4th Edition

George Grätzer

More Math Into LaTeX

4th Edition

Foreword by
Rainer Schöpf
LaTeX3 team

Springer

George Grätzer
Department of Mathematics
University of Manitoba
Winnipeg, MB R3T 2N2
Canada
gratzer@mas.umanitoba.ca

Cover design by Mary Burgess.
Typeset by the author in LaTeX.

Library of Congress Control Number: 2007923503

ISBN-13: 978-0-387-32289-6 e-ISBN-13: 978-0-387-68852-7

Printed on acid-free paper.

©2007 Springer Science+Business Media, LLC
All rights reserved. This work may not be translated or copied in whole or in part without the written permission of the publisher (Springer Science+Business Media LLC, 233 Spring Street, New York, NY 10013, USA) and the author, except for brief excerpts in connection with reviews or scholarly analysis. Use in connection with any form of information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed is forbidden.
The use in this publication of trade names, trademarks, service marks and similar terms, even if they are not identified as such, is not to be taken as an expression of opinion as to whether or not they are subject to proprietary rights.

9 8 7 6 5 4 3 2 1

springer.com (HP)

To the **Volunteers**
without whose dedication over 15 years,
this book could not have been done

and to my four grandchildren
Danny (11),

Anna (8),

Emma (2),

and **Kate** (0)

Short Contents

Foreword **xxi**

Preface to the Fourth Edition **xxv**

Introduction **xxix**

I Short Course **1**

1 Your LaTeX **3**

2 Typing text **7**

3 Typing math **17**

4 Your first article and presentation **35**

II Text and Math **59**

5 Typing text **61**

6 Text environments **117**

7 Typing math **151**

8 More math **187**

9 Multiline math displays **207**

III Document Structure 245

10 LaTeX documents 247

11 The AMS article document class 271

12 Legacy document classes 303

IV Presentations and PDF Documents 315

13 PDF documents 317

14 Presentations 325

V Customization 361

15 Customizing LaTeX 363

VI Long Documents 419

16 BibTeX 421

17 *MakeIndex* 449

18 Books in LaTeX 465

A Installation 489

B Math symbol tables 501

C Text symbol tables 515

D Some background 521

E LaTeX and the Internet 537

F PostScript fonts 543

G LaTeX localized 547

H Final thoughts 551

Bibliography 557

Index 561

Contents

Foreword **xxi**

Preface to the Fourth Edition **xxv**
Acknowledgments xxvii

Introduction **xxix**
Is this book for you? xxix

I Short Course **1**

1 Your LaTeX **3**
1.1 Your computer 3
1.2 Sample files 4
1.3 Editing cycle 4
1.4 Three productivity tools 5

2 Typing text **7**
2.1 The keyboard 8
2.2 Your first note 9
2.3 Lines too wide 12
2.4 More text features 13

3 Typing math **17**
3.1 A note with math 17
3.2 Errors in math 19
3.3 Building blocks of a formula 22
3.4 Displayed formulas 27
3.4.1 Equations 27

3.4.2 Aligned formulas . . . 30
3.4.3 Cases . . . 33

4 Your first article and presentation 35
4.1 The anatomy of an article . . . 35
4.1.1 The typeset sample article . . . 41
4.2 An article template . . . 44
4.2.1 Editing the top matter . . . 44
4.2.2 Sectioning . . . 46
4.2.3 Invoking proclamations . . . 46
4.2.4 Inserting references . . . 47
4.3 On using LaTeX . . . 48
4.3.1 LaTeX error messages . . . 48
4.3.2 Logical and visual design . . . 52
4.4 Converting an article to a presentation . . . 53
4.4.1 Preliminary changes . . . 53
4.4.2 Making the pages . . . 55
4.4.3 Fine tuning . . . 55

II Text and Math 59

5 Typing text 61
5.1 The keyboard . . . 62
5.1.1 Basic keys . . . 62
5.1.2 Special keys . . . 63
5.1.3 Prohibited keys . . . 63
5.2 Words, sentences, and paragraphs . . . 64
5.2.1 Spacing rules . . . 64
5.2.2 Periods . . . 66
5.3 Commanding LaTeX . . . 67
5.3.1 Commands and environments . . . 68
5.3.2 Scope . . . 71
5.3.3 Types of commands . . . 73
5.4 Symbols not on the keyboard . . . 74
5.4.1 Quotation marks . . . 75
5.4.2 Dashes . . . 75
5.4.3 Ties or nonbreakable spaces . . . 76
5.4.4 Special characters . . . 76
5.4.5 Ellipses . . . 78
5.4.6 Ligatures . . . 79
5.4.7 Accents and symbols in text . . . 79
5.4.8 Logos and dates . . . 80

5.4.9 Hyphenation 82
5.5 Comments and footnotes 85
5.5.1 Comments 85
5.5.2 Footnotes 87
5.6 Changing font characteristics 88
5.6.1 Basic font characteristics 88
5.6.2 Document font families 89
5.6.3 Shape commands 90
5.6.4 Italic corrections 91
5.6.5 Series 93
5.6.6 Size changes 93
5.6.7 Orthogonality 94
5.6.8 Obsolete two-letter commands 94
5.6.9 Low-level commands 95
5.7 Lines, paragraphs, and pages 95
5.7.1 Lines 96
5.7.2 Paragraphs 99
5.7.3 Pages 100
5.7.4 Multicolumn printing 101
5.8 Spaces 102
5.8.1 Horizontal spaces 102
5.8.2 Vertical spaces 104
5.8.3 Relative spaces 105
5.8.4 Expanding spaces 106
5.9 Boxes 107
5.9.1 Line boxes 107
5.9.2 Frame boxes 109
5.9.3 Paragraph boxes 110
5.9.4 Marginal comments 112
5.9.5 Solid boxes 113
5.9.6 Fine tuning boxes 115

6 Text environments **117**
6.1 Some general rules for displayed text environments 118
6.2 List environments 118
6.2.1 Numbered lists 119
6.2.2 Bulleted lists 119
6.2.3 Captioned lists 120
6.2.4 A rule and combinations 120
6.3 Style and size environments 123
6.4 Proclamations (theorem-like structures) 124
6.4.1 The full syntax 128

6.4.2 Proclamations with style . . . 129
6.5 Proof environments . . . 131
6.6 Tabular environments . . . 133
6.6.1 Table styles . . . 140
6.7 Tabbing environments . . . 141
6.8 Miscellaneous displayed text environments . . . 143

7 Typing math **151**
7.1 Math environments . . . 152
7.2 Spacing rules . . . 154
7.3 Equations . . . 156
7.4 Basic constructs . . . 157
7.4.1 Arithmetic operations . . . 157
7.4.2 Binomial coefficients . . . 159
7.4.3 Ellipses . . . 160
7.4.4 Integrals . . . 161
7.4.5 Roots . . . 161
7.4.6 Text in math . . . 162
7.4.7 Building a formula step-by-step . . . 164
7.5 Delimiters . . . 166
7.5.1 Stretching delimiters . . . 167
7.5.2 Delimiters that do not stretch . . . 168
7.5.3 Limitations of stretching . . . 169
7.5.4 Delimiters as binary relations . . . 170
7.6 Operators . . . 170
7.6.1 Operator tables . . . 171
7.6.2 Defining operators . . . 173
7.6.3 Congruences . . . 173
7.6.4 Large operators . . . 174
7.6.5 Multiline subscripts and superscripts . . . 176
7.7 Math accents . . . 176
7.8 Stretchable horizontal lines . . . 178
7.8.1 Horizontal braces . . . 178
7.8.2 Overlines and underlines . . . 179
7.8.3 Stretchable arrow math symbols . . . 179
7.9 Formula Gallery . . . 180

8 More math **187**
8.1 Spacing of symbols . . . 187
8.1.1 Classification . . . 188
8.1.2 Three exceptions . . . 188
8.1.3 Spacing commands . . . 190
8.1.4 Examples . . . 190

8.1.5 The `phantom` command . . . 191
8.2 Building new symbols . . . 192
8.2.1 Stacking symbols . . . 192
8.2.2 Negating and side-setting symbols . . . 194
8.2.3 Changing the type of a symbol . . . 195
8.3 Math alphabets and symbols . . . 195
8.3.1 Math alphabets . . . 196
8.3.2 Math symbol alphabets . . . 197
8.3.3 Bold math symbols . . . 197
8.3.4 Size changes . . . 199
8.3.5 Continued fractions . . . 200
8.4 Vertical spacing . . . 200
8.5 Tagging and grouping . . . 201
8.6 Miscellaneous . . . 204
8.6.1 Generalized fractions . . . 204
8.6.2 Boxed formulas . . . 205

9 Multiline math displays 207
9.1 Visual Guide . . . 207
9.1.1 Columns . . . 209
9.1.2 Subsidiary math environments . . . 209
9.1.3 Adjusted columns . . . 210
9.1.4 Aligned columns . . . 210
9.1.5 Touring the Visual Guide . . . 210
9.2 Gathering formulas . . . 211
9.3 Splitting long formulas . . . 212
9.4 Some general rules . . . 215
9.4.1 General rules . . . 215
9.4.2 Subformula rules . . . 215
9.4.3 Breaking and aligning formulas . . . 217
9.4.4 Numbering groups of formulas . . . 218
9.5 Aligned columns . . . 219
9.5.1 An `align` variant . . . 221
9.5.2 `eqnarray`, the ancestor of `align` . . . 222
9.5.3 The subformula rule revisited . . . 223
9.5.4 The `alignat` environment . . . 224
9.5.5 Inserting text . . . 226
9.6 Aligned subsidiary math environments . . . 227
9.6.1 Subsidiary variants . . . 227
9.6.2 Split . . . 230
9.7 Adjusted columns . . . 231
9.7.1 Matrices . . . 232

9.7.2 Arrays . . . 236
9.7.3 Cases . . . 239
9.8 Commutative diagrams . . . 240
9.9 Adjusting the display . . . 242

III Document Structure 245

10 LaTeX documents 247
10.1 The structure of a document . . . 248
10.2 The preamble . . . 249
10.3 Top matter . . . 251
10.3.1 Abstract . . . 251
10.4 Main matter . . . 251
10.4.1 Sectioning . . . 252
10.4.2 Cross-referencing . . . 255
10.4.3 Floating tables and illustrations . . . 258
10.5 Back matter . . . 261
10.5.1 Bibliographies in articles . . . 261
10.5.2 Simple indexes . . . 267
10.6 Visual design . . . 268

11 The AMS article document class 271
11.1 Why `amsart`? . . . 271
11.1.1 Submitting an article to the AMS . . . 271
11.1.2 Submitting an article to Algebra Universalis . . . 272
11.1.3 Submitting to other journals . . . 272
11.1.4 Submitting to conference proceedings . . . 273
11.2 The top matter . . . 273
11.2.1 Article information . . . 273
11.2.2 Author information . . . 275
11.2.3 AMS information . . . 279
11.2.4 Multiple authors . . . 281
11.2.5 Examples . . . 282
11.2.6 Abstract . . . 285
11.3 The sample article . . . 285
11.4 Article templates . . . 294
11.5 Options . . . 297
11.6 The AMS packages . . . 300

12 Legacy document classes **303**
12.1 Articles and reports . . . 303
12.1.1 Top matter . . . 304
12.1.2 Options . . . 306
12.2 Letters . . . 308
12.3 The LaTeX distribution . . . 310
12.3.1 Tools . . . 312

IV Presentations and PDF Documents **315**

13 PDF documents **317**
13.1 PostScript and PDF . . . 317
13.1.1 PostScript . . . 317
13.1.2 PDF . . . 318
13.1.3 Hyperlinks . . . 319
13.2 Hyperlinks for LaTeX . . . 319
13.2.1 Using `hyperref` . . . 320
13.2.2 `backref` and `colorlinks` . . . 320
13.2.3 Bookmarks . . . 321
13.2.4 Additional commands . . . 322

14 Presentations **325**
14.1 Quick and dirty `beamer` . . . 326
14.1.1 First changes . . . 326
14.1.2 Changes in the body . . . 327
14.1.3 Making things prettier . . . 328
14.1.4 Adjusting the navigation . . . 328
14.2 Baby `beamers` . . . 333
14.2.1 Overlays . . . 333
14.2.2 Understanding overlays . . . 335
14.2.3 More on the `\only` and `\onslide` commands . . . 337
14.2.4 Lists as overlays . . . 339
14.2.5 Out of sequence overlays . . . 341
14.2.6 Blocks and overlays . . . 343
14.2.7 Links . . . 343
14.2.8 Columns . . . 347
14.2.9 Coloring . . . 348
14.3 The structure of a presentation . . . 350
14.3.1 Longer presentations . . . 354
14.3.2 Navigation symbols . . . 354
14.4 Notes . . . 355
14.5 Themes . . . 356

14.6 Planning your presentation . . . 358
14.7 What did I leave out? . . . 358

V Customization 361

15 Customizing LaTeX 363
15.1 User-defined commands . . . 364
15.1.1 Examples and rules . . . 364
15.1.2 Arguments . . . 370
15.1.3 Short arguments . . . 373
15.1.4 Optional arguments . . . 374
15.1.5 Redefining commands . . . 374
15.1.6 Redefining names . . . 375
15.1.7 Showing the definitions of commands . . . 376
15.1.8 Delimited commands . . . 378
15.2 User-defined environments . . . 380
15.2.1 Modifying existing environments . . . 380
15.2.2 Arguments . . . 383
15.2.3 Optional arguments with default values . . . 384
15.2.4 Short contents . . . 385
15.2.5 Brand-new environments . . . 385
15.3 A custom command file . . . 386
15.4 The sample article with user-defined commands . . . 392
15.5 Numbering and measuring . . . 398
15.5.1 Counters . . . 399
15.5.2 Length commands . . . 403
15.6 Custom lists . . . 406
15.6.1 Length commands for the `list` environment . . . 407
15.6.2 The `list` environment . . . 409
15.6.3 Two complete examples . . . 411
15.6.4 The `trivlist` environment . . . 414
15.7 The dangers of customization . . . 415

VI Long Documents 419

16 BibTeX 421
16.1 The database . . . 423
16.1.1 Entry types . . . 423
16.1.2 Typing fields . . . 426
16.1.3 Articles . . . 428
16.1.4 Books . . . 429

16.1.5 Conference proceedings and collections 430
16.1.6 Theses 433
16.1.7 Technical reports 434
16.1.8 Manuscripts and other entry types 435
16.1.9 Abbreviations 436
16.2 Using BIBTEX 437
16.2.1 Sample files 437
16.2.2 Setup 439
16.2.3 Four steps of BIBTEXing 440
16.2.4 BIBTEX rules and messages 443
16.2.5 Submitting an article 446
16.3 Concluding comments 446

17 *MakeIndex* 449
17.1 Preparing the document 449
17.2 Index commands 453
17.3 Processing the index entries 459
17.4 Rules 462
17.5 Multiple indexes 463
17.6 Glossary 464
17.7 Concluding comments 464

18 Books in LATEX 465
18.1 Book document classes 466
18.1.1 Sectioning 466
18.1.2 Division of the body 467
18.1.3 Document class options 468
18.1.4 Title pages 469
18.1.5 Springer's document class for monographs 469
18.2 Tables of contents, lists of tables and figures 473
18.2.1 Tables of contents 473
18.2.2 Lists of tables and figures 475
18.2.3 Exercises 476
18.3 Organizing the files for a book 476
18.3.1 The folders and the master document 477
18.3.2 Inclusion and selective inclusion 478
18.3.3 Organizing your files 479
18.4 Logical design 479
18.5 Final preparations for the publisher 482
18.6 If you create the PDF file for your book 484

A Installation **489**
A.1 LaTeX on a PC . . . 490
A.1.1 Installing MiKTeX . . . 490
A.1.2 Installing WinEdt . . . 490
A.1.3 The editing cycle . . . 491
A.1.4 Making a mistake . . . 491
A.1.5 Three productivity tools . . . 494
A.1.6 An important folder . . . 494
A.2 LaTeX on a Mac . . . 495
A.2.1 Installations . . . 495
A.2.2 Working with TeXShop . . . 496
A.2.3 The editing cycle . . . 498
A.2.4 Making a mistake . . . 498
A.2.5 Three productivity tools . . . 498
A.2.6 An important folder . . . 499

B Math symbol tables **501**
B.1 Hebrew and Greek letters . . . 501
B.2 Binary relations . . . 503
B.3 Binary operations . . . 506
B.4 Arrows . . . 507
B.5 Miscellaneous symbols . . . 508
B.6 Delimiters . . . 509
B.7 Operators . . . 510
B.7.1 Large operators . . . 511
B.8 Math accents and fonts . . . 512
B.9 Math spacing commands . . . 513

C Text symbol tables **515**
C.1 Some European characters . . . 515
C.2 Text accents . . . 516
C.3 Text font commands . . . 516
C.3.1 Text font family commands . . . 516
C.3.2 Text font size changes . . . 517
C.4 Additional text symbols . . . 518
C.5 Additional text symbols with T1 encoding . . . 519
C.6 Text spacing commands . . . 520

D Some background **521**
D.1 A short history . . . 521
D.1.1 TeX . . . 521
D.1.2 LaTeX 2.09 and $\mathcal{A}\mathcal{M}\mathcal{S}$-TeX . . . 522
D.1.3 LaTeX3 . . . 523

D.1.4 More recent developments . . . 524
D.2 Structure . . . 525
D.2.1 Using LaTeX . . . 525
D.2.2 AMS packages revisited . . . 528
D.3 How LaTeX works . . . 528
D.3.1 The layers . . . 528
D.3.2 Typesetting . . . 529
D.3.3 Viewing and printing . . . 530
D.3.4 LaTeX's files . . . 531
D.4 Interactive LaTeX . . . 534
D.5 Separating form and content . . . 535

E LaTeX and the Internet **537**
E.1 Obtaining files from the Internet . . . 537
E.2 The TeX Users Group . . . 541
E.3 Some useful sources of LaTeX information . . . 542

F PostScript fonts **543**
F.1 The Times font and MathTıme . . . 544
F.2 Lucida Bright fonts . . . 546
F.3 More PostScript fonts . . . 546

G LaTeX localized **547**

H Final thoughts **551**
H.1 What was left out? . . . 551
H.1.1 LaTeX omissions . . . 551
H.1.2 TeX omissions . . . 552
H.2 Further reading . . . 553
H.3 What's coming . . . 554

Bibliography **557**

Index **561**

Foreword

It was the autumn of 1989—a few weeks before the Berlin wall came down, President George H. W. Bush was president, and the American Mathematical Society decided to outsource TEX programming to Frank Mittelbach and me.

Why did the AMS outsource TEX programming to us? This was, after all, a decade before the words "outsourcing" and "off-shore" entered the lexicon. There were many American TEX experts. Why turn elsewhere?

For a number of years, the AMS tried to port the mathematical typesetting features of $\mathcal{A}\mathcal{M}\mathcal{S}$-TEX to LATEX, but they made little progress with the AMSFonts. Frank and I had just published the New Font Selection Scheme for LATEX, which went a long way to satisfy what they wanted to accomplish. So it was logical that the AMS turned to us to add AMSFonts to LATEX. Being young and enthusiastic, we convinced the AMS that the $\mathcal{A}\mathcal{M}\mathcal{S}$-TEX commands should be changed to conform to the LATEX standards. Michael Downes was assigned as our AMS contact; his insight was a tremendous help.

We already had LATEX-NFSS, which could be run in two modes: compatible with the old LATEX or enabled with the new font features. We added the reworked $\mathcal{A}\mathcal{M}\mathcal{S}$-TEX code to LATEX-NFSS, thus giving birth to $\mathcal{A}\mathcal{M}\mathcal{S}$-LATEX, released by the AMS at the August 1990 meeting of the International Mathematical Union in Kyoto.

$\mathcal{A}\mathcal{M}\mathcal{S}$-LATEX was another variant of LATEX. Many installations had several LATEX variants to satisfy the needs of their users: with old and new font changing commands, with and without $\mathcal{A}\mathcal{M}\mathcal{S}$-LATEX, a single and a multi-language version. We decided to develop a Standard LATEX that would reconcile all the variants. Out of a group of interested people grew what was later called the *LATEX3 team*—and the LATEX3 project got underway. The team's first major accomplishment was the release of LATEX 2_ε in June 1994. This standard LATEX incorporates all the improvements we wanted back in 1989. It is now very stable and it is uniformly used.

Under the direction of Michael Downes, our $\mathcal{A}\mathcal{M}\mathcal{S}$-LATEX code was turned into AMS packages that run under LATEX just like other packages. Of course, the LATEX3

team recognizes that these are special; we call them "required packages" because they are part and parcel of a mathematician's standard toolbox.

Since then a lot has been achieved to make an author's task easier. A tremendous number of additional packages are available today. The *LaTeX Companion,* 2nd edition, describes many of my favorite packages.

George Grätzer got involved with these developments in 1990, when he got his copy of $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX in Kyoto. The documentation he received explained that $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX is a LaTeX variant—read Lamport's LaTeX book to get the proper background. $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX is not $\mathcal{A}\mathcal{M}\mathcal{S}$-TeX either—read Spivak's $\mathcal{A}\mathcal{M}\mathcal{S}$-TeX book to get the proper background. The rest of the document explained in what way $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX differs from LaTeX and $\mathcal{A}\mathcal{M}\mathcal{S}$-TeX. Talk about a steep learning curve ...

Luckily, George's frustration working through this nightmare was eased by a lengthy e-mail correspondence with Frank and lots of telephone calls to Michael. Three years of labor turned into his first book on LaTeX, providing a "simple introduction to $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX".

This fourth edition is more mature, but preserves what made his first book such a success. Just as in the first book, Part I is a short introduction for the beginner, dramatically reducing the steep learning curve of a few weeks to a few hours. The rest of the book is a detailed presentation of what you may need to know. George "teaches by example". You find in this book many illustrations of even the simplest concepts. For articles, he presents the LaTeX source file and the typeset result side-by-side. For formulas, he discusses the building blocks with examples, presents a *Formula Gallery,* and a *Visual Guide* to multiline formulas.

Going forth and creating "masterpieces of the typesetting art"—as Donald Knuth put it at the end of the *TeXbook*—requires a fair bit of initiation. This is the book for the LaTeX beginner as well as for the advanced user. You just start at a different point.

The topics covered include everything you need for mathematical publishing.

- Starting from scratch, by installing and running LaTeX on your own computer
- Instructions on creating articles, from the simple to the complex
- Converting an article to a presentation
- Customize LaTeX to your own needs
- The secrets of writing a book
- Where to turn to get more information or to download updates

The many examples are complemented by a number of easily recognizable features:

Rules which you must follow

Tips on how to achieve some specific results

Experiments to show what happens when you make mistakes—sometimes, it can be difficult to understand what went wrong when all you see is an obscure LaTeX error message

This book teaches you how to convert your mathematical masterpieces into typographical ones, giving you a lot of useful advice on the way. How to avoid the traps for the unwary and how to make your editor happy. And hopefully, you'll experience the fascination of doing it right. Using good typography to better express your ideas.

If you want to learn LaTeX, buy this book and start with the *Short Course*. If you can have only one book on LaTeX next to your computer, this is the one to have. And if you want to learn about the world of LaTeX packages, also buy a second book, the *LaTeX Companion,* 2nd edition.

Rainer Schöpf
LaTeX3 team

Preface to the Fourth Edition

This is my fourth full-sized book on LaTeX.

The first book, *Math into TeX: A Simple Introduction to AMS-LaTeX* [19], written in 1991 and 1992, introduced the brand new AMS-LaTeX, a LaTeX variant not compatible with the LaTeX of the time, LaTeX 2.09. It brought together the features of LaTeX and the math typesetting abilities of AMS-TeX, the AMS typesetting language.

The second book, *Math into LaTeX: An Introduction to LaTeX and AMS-LaTeX* [27], written in 1995, describes the new LaTeX introduced by the LaTeX3 team and the AMS typesetting features implemented as extensions of LaTeX, called packages.

The third book, *Math into LaTeX*, 3rd edition [30], published in 2000, reports on the same system. By 2000, both the "new" LaTeX and the AMS packages were quite mature. The feverish debugging of the new LaTeX every six months bore fruit. LaTeX became very stable. It has changed little since 2000. Version 2.0 of the AMS packages was released and it also became very stable. The third book reports on a rock solid typesetting system.

What also changed between 1995 and 2000 is the widespread use of the Internet. Several chapters of the third book deal with the impact of the Internet on mathematical publications.

Now, seven years later, we can still report that LaTeX—no longer new—and the AMS packages have changed very little. However, the impact of the Internet became even more important. Computers also changed. They are now much more powerful. When I started typesetting math with LaTeX, it took two and a half minutes to typeset a page. This book takes 1.8 seconds to typeset on my computer, a Mac desktop from 2006. As a result, we do not have to be very selective in what we load into memory; we can load everything we may possibly need.

Circumincession

So this is the first big change compared to the previous books. In this book, we roll TEX, LATEX, and the AMS packages into one, and we call it simply LATEX. This results in a great simplification in the exposition and makes the learning curve a little less steep.

I am sure with some advanced users this will prove to be a controversial decision. They want to know where a command is defined. For the beginner and the non-expert user this does not make any difference. What matters is that the command they need be available when they need it.

From the beginner's point of view, this approach is very beneficial. Take as an example the `\text` command. In all three of my books, we first introduce the LATEX command `\mbox` for typing text in math formulas. After half a page of discussion comes the sentence: "It is better to enter text in formulas with the `\text` command provided by the `amsmath` package." Then another half page discusses the command `\text`. In this book, we ignore `\mbox` and go right-away to `\text`. You do not have to do anything to access the command, the `amsmath` package is always loaded for you.

And what to do if you want to find out where a command is defined. Now for both the PC and the Mac, you can easily search for contents of files. Do you want to know where a command is defined? Search for it and it is easy to find the file in which it is introduced.

Presentations

The second big change is the widespread acceptance of the Adobe PDF format. As a result, the majority of the lectures today at math meetings are given as *presentations*, PDF files projected to screens using computers. Blackboards and whiteboards have largely disappeared and computer projections are overtaking projectors. So this book takes up presentations as a major topic, introducing it in Part I and discussing it in detail in Chapter 14.

Installations

In the third book, I report a recurring question that comes up from my readers again and again:

Can you help me get started from scratch, covering everything from installing a working LATEX system to the rudiments of text editing?

And here is the third big change that has happened in the last few years. While earlier there were dozens of different LATEX implementations and hundreds of text editors, today most PC users use `MiKTeX` with the text editor/front end `WinEdt` and most Mac users use TEX Live with the text editor/front end `TeXShop`. So if you want help to

install LaTeX, it is easy for me to help you. Appendix A provides instructions on how to install these systems.

Acknowledgments

This book is based, of course, on the three previous books. I would like to thank the many people who read and reread those earlier manuscripts.

The editors Richard Ribstein, Thomas R. Scavo, Claire M. Connelly.

The professionals Michael Downes (the project leader for the AMS), Frank Mittelbach and David Carlisle (of the LaTeX3 team) read and criticized some or all of the three books.

Oren Patashnik (the author of BibTeX) carefully corrected the BibTeX chapter for two editions.

Sebastian Rahtz (the author of the `hyperref` package and coauthor of *The LaTeX Web Companion* [18]) read the chapter on the Web in the third book.

Last but not least, Barbara Beeton of the AMS read all three books with incredible insight.

The volunteers for the second book alone, there were 29—listed there. The volunteer readers made tremendous contributions and offered hundreds of pages of corrections. No expert can substitute for the diverse points of view I got from them.

My colleagues especially Michael Doob, Harry Lakser, and Craig Platt, who have been very generous with their time.

The publishers Edwin Beschler, who believed in the project from the very beginning and guided it through a decade and Ann Kostant who continued Edwin's work.

For this book, I have had the most talented and thorough group of readers ever: Andrew Adler of the University of British Columbia, Canada, Joseph Maria Font of the University of Barcelona, Spain, and Alan Litchfield, of the Auckland University of Technology, New Zealand. Chapter 14 was read by David Derbes, Adam Goldstein, Mark Eli Kalderon, Michael Kubovy, Matthieu Masquelet, and Charilaos Skiadas—and Chapter 15 by Ross Moore. Interestingly, only half of them are mathematicians, the rest are philosophers, linguists, and so on. Appendix A.1 was read by Brian Davey and Appendix A.2 by Richard Koch (the author of `TeXShop`).

The fourth edition was edited by Barbara Beeton, Edwin Beschler, and Clay Martin with Ann Kostant as the Springer editor. The roles of Edwin and Ann have changed, but not the importance of their contributions. The index was compiled with painstaking precision by Laura Kirkland. Barbara Beeton also provided a number of intriguing illustrations of quaint commands. My indebtedness to her cannot be overstated.

George Grätzer

Introduction

Is this book for you?

This book is for the mathematician, physicist, engineer, scientist, linguist, or technical typist who has to learn how to typeset articles containing mathematical formulas or diacritical marks. It teaches you how to use LaTeX, a typesetting markup language based on Donald E. Knuth's typesetting language TeX, designed and implemented by Leslie Lamport, and greatly improved by the AMS.

Part I provides a quick introduction to LaTeX, from typing examples of text and math to typing your first article (such as the sample article on pages 42–43) and creating your first presentation (such as the sample presentation on pages 57–58) in a very short time. The rest of the book provides a detailed exposition of LaTeX.

LaTeX has a huge collection of rules and commands. While the basics in Part I should serve you well in all your writings, most articles and presentations also require you to look up special topics. Learn Part I well and become passingly familiar enough with the rest of the book, so when the need arises you know where to turn with your problems.

You can find specific topics in one or more of the following sources: the Short Contents, the detailed Contents, and the Index.

What is document markup?

When you work with a word processor, you see your document on the computer monitor more or less as it looks when printed, with its various fonts, font sizes, font shapes (e.g., roman, italic) and weights (e.g., normal, boldface), interline spacing, indentation, and so on.

Working with a *markup language* is different. You type the *source file* of your article in a *text editor,* in which all characters appear in the same font. To indicate changes in the typeset text, you must add *text markup commands* to the source file.

For instance, to emphasize the phrase `detailed description` in a LaTeX source file, type

```
\emph{detailed description}
```

The `\emph` command is a markup command. The marked-up text yields the typeset output

detailed description

In order to typeset math, you need *math markup commands*. As a simple example, you may need the formula $\int \sqrt{\alpha^2 + x^2}\, dx$ in an article you are writing. To mark up this formula in LaTeX, type

```
$\int \sqrt{\alpha^{2} + x^{2}}\,dx$
```

You do not have to worry about determining the size of the integral symbol or how to construct the square root symbol that covers $\alpha^2 + x^2$. LaTeX does it all for you.

On pages 290–293, I juxtapose the source file for a sample article with the typeset version. The markup in the source file may appear somewhat challenging at first, but I think you agree that the typeset article is a pleasing rendering of the original input.

The three layers

The markup language we shall discuss comes in three layers: TeX, LaTeX, and the AMS packages, described in detail in Appendix D. Most LaTeX installations—including the two covered in Appendix A—automatically place all three on your computer. You do not have to know what comes from which layer, so we consider the three together and call it LaTeX.

The three platforms

Most of you run LaTeX on one of the following three computer types:

- A PC, a computer running Microsoft Windows
- A Mac[1], a Macintosh computer running OS X
- A computer running a UNIX variant such as Solaris or Linux

The LaTeX source file and the typeset version both look the same independent of what computer you have. However, the way you type your source file, the way you typeset it, and the way you look at the typeset version depends on the computer and on the LaTeX implementation you use. In Appendix A, we show you how to install LaTeX for a PC and a Mac. Many UNIX systems come with LaTeX installed.

[1] In the old days, I used to run TEXTURES under OS 9. Unfortunately, TEXTURES does not run on new Intel Macs.

What's in the book?

Part I is the *Short Course;* it helps you to get started quickly with LaTeX, to type your first articles, to prepare your first presentations, and it prepares you to tackle LaTeX in more depth in the subsequent parts. We assume here that LaTeX is installed on your computer. If it is not, jump to Appendix A.

Chapter 1 introduces the *terminology* we need to talk about your LaTeX implementations. **Chapter 2** introduces how LaTeX uses the *keyboard* and how to *type text*. You do not need to learn much to understand the basics. Text markup is quite easy. You learn math markup—which is not so straightforward—in **Chapter 3**. Several sections in this chapter ease you into *mathematical typesetting.* There is a section on the basic building blocks of math formulas. Another one discusses equations. Finally, we present the two simplest multiline formulas, which, however, cover most of your everyday needs.

In **Chapter 4**, you start writing your *first article* and prepare your *first presentation*. A LaTeX article is introduced with the sample article `intrart.tex`. We analyze in detail its structure and its source file, and we look at the typeset version. Based on this, we prepare an article template, and you are ready for your first article. A quick conversion of the article `intrart.tex` to a presentation introduces this important topic.

Part II introduces the two most basic skills for writing with LaTeX in depth, *typing text* and *typing math.*

Chapters 5 and **6** introduce *text* and *displayed text.* Chapter 5 is especially important because, when you type a LaTeX document, most of your time is spent typing text. The topics covered include special characters and accents, hyphenation, fonts, and spacing. Chapter 6 covers displayed text, including *lists* and *tables,* and for the mathematician, *proclamations* (theorem-like structures) and *proofs*.

Typing math is the heart of any mathematical typesetting system. **Chapter 7** discusses inline formulas in detail, including basic constructs, delimiters, operators, math accents, and horizontally stretchable lines. The chapter concludes with the *Formula Gallery*.

Math symbols are covered in three sections in **Chapter 8**. How to space them, how to build new ones. We also look at the closely related subjects of math alphabets and fonts. Then we discuss tagging and grouping equations.

LaTeX knows a lot about typesetting an inline formula, but not much about how to display a multiline formula. **Chapter 9** presents the numerous tools LaTeX offers to help you do that. We start with a *Visual Guide* to help you get oriented.

Part III discusses the parts of a LaTeX document. In **Chapter 10**, you learn about the *structure* of a LaTeX document. The most important topics are *sectioning* and *cross-referencing*. In **Chapter 11**, we discuss the `amsart` *document class* for articles. In particular, I present the title page information. Chapter 11 also features `sampart.tex`, a sample article for `amsart`, first in typeset form, then in mixed form, juxtaposing the source file and the typeset article. You can learn a lot about LaTeX just by reading the source file one paragraph at a time and seeing how that paragraph is typeset. We con-

clude this chapter with a brief description of the AMS distribution, the packages and document classes, of which `amsart` is a part.

In **Chapter 12** the most commonly used *legacy document classes* are presented, `article`, `report`, and `letter` (the `book` class is discussed in Chapter 18), along with a description of the standard LaTeX distribution. Although `article` is not as sophisticated as `amsart`, it is commonly used for articles not meant for publication.

In **Part IV**, we start with **Chapter 13**, discussing PDF *files, hyperlinks,* and the `hyperref` package. This prepares you for *presentations,* which are PDF files with hyperlinks. In **Chapter 14** we utilize the `beamer` *package* for making LaTeX presentations.

Part V (**Chapter 15**) introduces techniques to *customize* LaTeX: user-defined commands, user-defined environments, and command files. We present a sample command file, `newlattice.sty`, and a version of the sample article utilizing this command file. You learn how parameters that affect LaTeX's behavior are stored in counters and length commands, how to change them, and how to design your own custom lists. A final section discusses the pitfalls of customization.

In **Part VI** (**Chapters 16** and **17**), we discuss the special needs of longer documents. Two applications, contained in the standard LaTeX distribution, BibTeX and *MakeIndex*, make compiling *large bibliographies* and *indexes* much easier.

LaTeX provides the `book` and the `amsbook` document classes to serve as foundations for well-designed books. We discuss these in **Chapter 18**. Better quality books have to use document classes designed by professionals. We provide some sample pages from a book using Springer's `svmono.cls` document class.

Detailed instructions are given in **Appendix A** on how to install LaTeX on a PC and a Mac. On a PC we install `WinEdt` and `MiKTeX`. On a Mac, we install `MacTeX`, which consists of TeX Live and `TeXShop`. For both installations, we describe the editing cycle and three productivity tools in sufficient detail so that you be able to handle the tasks on the sample files of the *Short Course*.

You will probably find yourself referring to **Appendices B** and **C** time and again. They contain the *math and text symbol tables.*

Appendix D relates some historical background material on LaTeX. It gives you some insight into how LaTeX developed and how it works. **Appendix E** discusses the many ways we can find LaTeX material on the *Internet.*

Appendix F is a brief introduction to the use of *PostScript fonts* in a LaTeX document. **Appendix G** briefly describes the use of LaTeX for languages other than American English.

Finally, **Appendix H** discusses what we left out and points you towards some areas for further reading.

Mission statement

This book is a guide for typesetting mathematical documents within the constraints imposed by LaTeX, an elaborate system with hundreds of rules. LaTeX allows you to perform almost any mathematical typesetting task through the appropriate application of its rules. You can customize LaTeX by introducing user-defined commands and environments and by changing LaTeX parameters. You can also extend LaTeX by invoking packages that accomplish special tasks.

It is *not my goal*

- to survey the hundreds of LaTeX packages you can utilize to enhance LaTeX
- to teach how to write TeX code and to create your own packages
- to discuss how to design beautiful documents by writing document classes

The definitive book on the first topic is Frank Mittelbach and Michel Goosens's *The LaTeX Companion,* 2nd edition [46] (with Johannes Braams, David Carlisle, and Chris Rowley). The second and third topics still await authoritative treatment.

Conventions

To make this book easy to read, I use some simple conventions:

- Explanatory text is set in this typeface: Times.
- `Computer Modern typewriter is used to show what you should type, as well as messages from LaTeX. All the characters in this typeface have the same width, making it easy to recognize.`
- I also use Computer Modern typewriter to indicate
  - Commands (`\parbox`)
  - Environments (`\align`)
  - Documents (`intrart.tex`)
  - Document classes (`amsart`)
  - Document class options (`draft`)
  - Folders or directories (`work`)
  - The names of *packages,* which are extensions of LaTeX (`verbatim`)
- When I show you how something looks when typeset, I use Computer Modern, TeX's standard typeface:

I think you find this typeface sufficiently different from the other typefaces I have used. The strokes are much lighter so that you should not have much difficulty recognizing typeset LaTeX material. When the typeset material is a separate paragraph or paragraphs, corner brackets in the margin set it off from the rest of the text—unless it is a displayed formula.

- For explanations in the text, such as

  Compare iff with iff, typed as `iff` and `if{f}`, respectively.

  the same typefaces are used. Because they are not set off spatially, it may be a little more difficult to see that iff is set in Computer Modern roman (in Times, it looks like this: iff), whereas `iff` is set in the Computer Modern typewriter typeface.

- I usually introduce commands with examples, such as

  `\\[22pt]`

  However, it is sometimes necessary to define the syntax of a command more formally. For instance,

  `\\[`*`length`*`]`

  where *length*, typeset in Computer Modern typewriter italic font, represents the value you have to supply.

Good luck and have fun.

E-mail:
`gratzer@ms.umanitoba.ca`
Home page:
`http://www.maths.umanitoba.ca/homepages/gratzer.html`

CHAPTER

1

Your LaTeX

Are you sitting in front of your computer, your LaTeX implementation up and running? In this chapter we get you ready to tackle this *Short Course*. When you are done with Part I, you will be ready to start writing your articles in LaTeX.

If you do not have a LaTeX implementation up and running, go to Appendix A. There you find precise and detailed instructions how to set up LaTeX on a PC or a Mac. There is enough in the appendix for you to be able to handle the tasks in this *Short Course*. You will be pleasantly surprised at how little time it takes to set LaTeX up. If you use some variant of UNIX, turn to a UNIX guru who can help you set up LaTeX on your computer and guide you through the basics. If all else fails, read the documentation for your UNIX system.

1.1 Your computer

We assume very little, only that you are familiar with your keyboard and with the operating system on your computer. You should know standard PC and Mac menus, pull down menus, buttons, tabs, the menu items, such as `Edit>Paste`, the menu item `Paste` on the menu `Edit`. You should understand folders (we use this terminology regardless of the platform, with apologies to our UNIX readers), and you need to know how to save a file and copy a file from one folder to another.

On a PC, `work\test` refers to the subfolder `test` of the folder `work`. On a Mac, `work/test` designates this subfolder. To avoid having to write every subfolder twice, we use `work/test`, with apologies to our PC readers.

1.2 Sample files

We work with a few sample documents in this *Short Course*. You can type the sample documents as presented in the text, or you can download them from the Internet (see Section E.1). The `samples` folder also contains a copy of `SymbolTables.pdf`, a PDF version of Appendices B and C, the symbol tables.

I suggest you create a folder on your computer named `samples`, to store the downloaded sample files, and another folder called `work`, where you will keep your working files. Copy the documents from the `samples` to the `work` folder as needed. *In this book, the* `samples` *and* `work` *folders refer to the folders you have created.*

If you `Save As...` a sample file under a different name, remember the naming rule.

Rule ■ **Naming of source files**

The name of a LaTeX source file should be *one word* (no spaces, no special characters), and end with `.tex`.

So `first art.tex` is bad, but `art1.tex` and `FirstArt.tex` are good.

1.3 Editing cycle

Watch a friend type a mathematical article in LaTeX and you learn some basic steps.

1. *A text editor is used to create a LaTeX source file*. A source file might look like the top window in Figure 1.1:

   ```
   \documentclass{amsart}
   \begin{document}
   The hypotenuse: $\sqrt{a^{2} + b^{2}}$. I can type math!
   \end{document}
   ```

   Note that the source file is different from a typical word processor file. All characters are displayed in the same font and size.

2. *Your friend "typesets" the source file* (*tells the application to produce a typeset version*) *and views the result on the monitor* (the two corners indicate material typeset by LaTeX):

   The hypotenuse: $\sqrt{a^2 + b^2}$. I can type math!

as in the middle window in Figure 1.1.

3. *The editing cycle continues.* Your friend goes back and forth between the source file and the typeset version, making changes and observing the results of these changes.

4. *The file is printed.* Once the typeset version is satisfactory, it is printed, creating a paper version of the typeset article. Alternatively, your friend creates a PDF file of the typeset version (see Chapter 13.1.2).

If LaTeX finds a mistake when typesetting the source file, it opens a new window, the *log window,* illustrated as the bottom window in Figure 1.1, and displays an error message. The same message is saved into a file, called the *log file*. Look at the figures in Appendix A, depicting a variety of editing windows, windows for the typeset article, and log windows for the two LaTeX implementations discussed there.

Various LaTeX implementations have different names for the source file, the text editor, the typeset file, the typeset window, the log window, and the log file. Become familiar with these names for the LaTeX implementation you use, so you can follow along with our discussions. In Appendix A, we bring you up to speed for the LaTeX implementations discussed therein.

1.4 Three productivity tools

Most LaTeX implementations have these important productivity tools:

Synchronization To move quickly between the source file and the typeset file, most LaTeX implementations offer *synchronization*, the ability to jump from the typeset

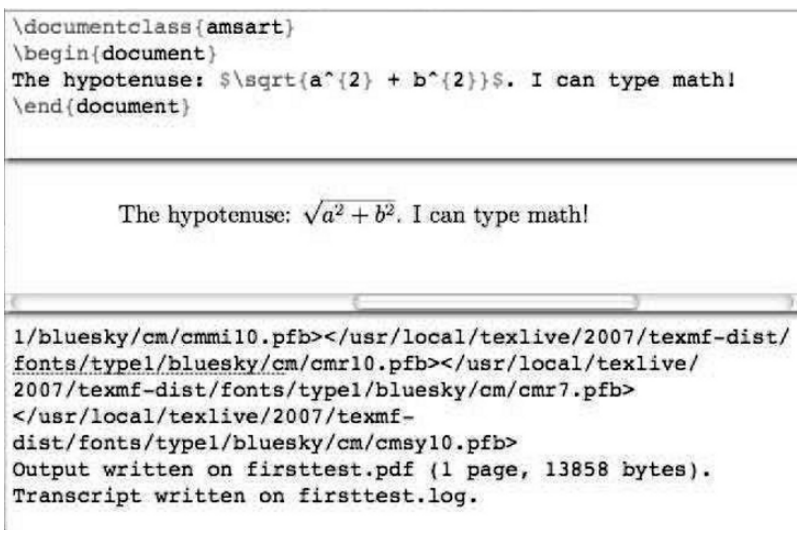

Figure 1.1: Windows for the source and typeset files and the log window.

file to the corresponding place in the source file and from the source file to the corresponding place in the typeset file.

Block comment Block comments are very useful:

1. When looking for a LaTeX error, you may want LaTeX to ignore a block of text in the source file (see page 51).

2. Often you may want to make comments about your project but not have them printed or you may want to keep text on hand while you try a different option. To accomplish this, insert a comment character, %, at the start of each line where the text appears. These lines are ignored when the LaTeX file is processed.

   Select a number of lines in a source document, then by choosing a menu option all the lines (the whole block) are commented out (a % sign is placed at the beginning of each line). This is *block comment*. The reverse is *block uncomment*.

Jump to a line This is specified by the line number in the source file. To find an error, LaTeX suggests that you jump to a line.

Find out how your LaTeX implements these features. In Appendix A, we discuss how these features are implemented for the LaTeX we install.

Pay careful attention how your LaTeX implementation works. This enables you to rapidly perform the editing cycle and utilize the productivity tools when necessary.

CHAPTER

2

Typing text

In this chapter, I introduce you to typesetting text by working through examples. More details are provided throughout the book, in particular, in Chapters 5 and 6.

A source file is made up of *text, math* (*formulas*), and *instructions* (*commands*) *to* LaTeX. For instance, consider the following variant of the first sentence of this paragraph:

```
A source file is made up of text, math (e.g.,
$\sqrt{5}$), and \emph{instructions to} \LaTeX.
```

This typesets as

A source file is made up of text, math (e.g., $\sqrt{5}$), and *instructions to* LaTeX.

In this sentence, the first part

```
A source file is made up of text, math (e.g.,
```

is text. Then

```
$\sqrt{5}$
```

is math

```
), and
```

is text again. Finally,

```
\emph{instructions to} \LaTeX.
```

are instructions. The instruction `\emph` is a *command with an argument,* while the instruction `\LaTeX` is a *command without an argument.*

Commands, as a rule, start with a backslash (`\`) and tell LaTeX to do something special. In this case, the command `\emph` emphasizes its *argument* (the text between the braces). Another kind of instruction to LaTeX is called an *environment.* For instance, the commands

```
\begin{flushright}
```

and

```
\end{flushright}
```

enclose a `flushright` environment; the *content*, that is, the text that is typed between these two commands, is right justified (lined up against the right margin) when typeset. (The `flushleft` environment creates left justified text; the `center` environment creates text that is centered horizontally on the page.)

In practice, text, math, and instructions (commands) are mixed. For example,

```
My first integral: $\int \zeta^{2}(x) \, dx$.
```

is a mixture of all three; it typesets as

My first integral: $\int \zeta^2(x)\,dx$.

Creating a document in LaTeX requires that we type the text and math in the source file. So we start with the keyboard, proceed to type a short note, and learn some simple rules for typing text in LaTeX.

2.1 The keyboard

The following keys are used to type text in a source file:

```
a-z   A-Z   0-9
+ = * / ( ) [ ]
```

You may also use the following punctuation marks:

```
, ; . ? ! : ‘ ’ -
```

and the space bar, the Tab key, and the Return (or Enter) key.

Since TEX source files are “pure text” (ASCII files), they are very portable. There is one possible problem limiting this portability, the line endings used in the source file. When you press the Return key, your text editor writes an invisible code into your source file that indicates where the line ends. Since this code may be different on different platforms (PC, Mac, and UNIX), you may have problems reading a source file created on a different platform. Luckily, many text editors include the ability to switch end-of-line codes and some, including the editors in `WinEdt` and `TeXShop`, do so automatically.

Finally, there are thirteen special keys that are mostly used in LATEX commands:

```
# $ % & ~ _ ^ \ { } @ " |
```

If you need to have these characters typeset in your document, there are commands to produce them. For instance, $ is typed as `\$`, the underscore, _, is typed as `\_`, and % is typed as `\%`. Only @ requires no special command, type `@` to print @. There are also commands to produce composite characters, such as accented characters, for example ä, which is typed as `\"{a}`. See Section 5.4.4 for a complete discussion of symbols not available directly from the keyboard and Appendix C for the text symbol tables. Appendices B and C are reproduced in the `samples` folder as a PDF file, `SymbolTables.pdf`.

LATEX prohibits the use of other keys on your keyboard—unless you are using a version of LATEX that is set up to work with non-English languages (see Appendix G). When trying to typeset a source file that contains a prohibited character, LATEX displays an error message similar to the following:

```
! Text line contains an invalid character.
l.222 completely irreducible^^?
                                ^^?
```

In this message, `l.222` means line 222 of your source file. You must edit that line to remove the character that LATEX cannot understand. The `log` file (see Section D.3.4) also contains this message. For more about LATEX error messages, see Sections 3.2 and 4.3.1.

2.2 Your first note

We start our discussion on how to type a note in LATEX with a simple example. Suppose you want to use LATEX to produce the following:

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple". I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Rudi Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

To produce this typeset document, create a new file in your `work` folder with the name `note1.tex`. Type the following, including the spacing and linebreaks shown, but not the line numbers:

```
1   % Sample file: note1.tex
2   \documentclass{sample}
3
4   \begin{document}
5   It is of some concern to me   that
6   the terminology used in  multi-section
7    math courses is not uniform.
8
9   In several sections of the course on
10  matrix theory, the  term
11   ``hamiltonian-reduced'' is used.
12   I, personally, would rather call these
13  ``hyper-simple''. I invite others
14   to comment on this  problem.
15
16  Of special concern to me is the terminology
17  in the course by Prof.~Rudi Hochschwabauer.
18  Since his field is new, there is no accepted
19  terminology.   It is imperative
20  that we arrive at a satisfactory solution.
21  \end{document}
```

Alternatively, copy the `note1.tex` file from the `samples` folder (see page 4). Make sure that `sample.cls` is in your `work` folder.

The first line of `note1.tex` starts with `%`. Such lines are called *comments* and are ignored by LaTeX. Commenting is very useful. For example, if you want to add some notes to your source file and you do not want those notes to appear in the typeset version of your article, you can begin those lines with a `%`. You can also comment out part of a line:

```
simply put, we believe % actually, it's not so simple
```

Everything on the line after the % character is ignored by LaTeX.

Line 2 specifies the *document class* (in our case, `sample`)[1] that controls how the document is formatted.

The text of the note is typed within the `document` environment, that is, between the lines

```
\begin{document}
```

and

```
\end{document}
```

Now typeset `note1.tex`. If you use `WinEdt`, click on the `TeXify` icon. If you use `TeXShop`, click the `Typeset` button. You should get the typeset document as shown on page 10. As you can see from this example, LaTeX is different from a word processor. It disregards the way you input and position the text, and follows only the formatting instructions given by the markup commands. LaTeX notices when you put a blank space in the text, but it ignores *how many blank spaces* have been inserted. LaTeX does not distinguish between a blank space (hitting the space bar), a tab (hitting the Tab key), and a *single* carriage return (hitting Return once). However, hitting Return twice gives a blank line; *one or more* blank lines mark the end of a paragraph.

LaTeX, by default, fully justifies text by placing a flexible amount of space between words—the *interword space*—and a somewhat larger space between sentences—the *intersentence space*. If you have to force an interword space, you can use the `\␣` command (in LaTeX books, we use the symbol ␣ to mean a blank space). See Section 5.2.2 for a full discussion.

The `~` (tilde) command also forces an interword space, but with a difference; it keeps the words on the same line. This command is called a *tie* or *nonbreakable space* (see Section 5.4.3).

Note that on lines 11 and 13, the left double quotes are typed as `‘‘` (two left single quotes) and the right double quotes are typed as `’’` (two right single quotes or apostrophes). The left single quote key is not always easy to find. On an American keyboard,[2] it is usually hidden in the upper-left or upper-right corner of the keyboard, and shares a key with the tilde (`~`).

[1] I know you have never heard of the `sample` document class. It is a special class created for these exercises. You can find it in the `samples` folder (see page 4). If you have not yet copied it over to the `work` folder, do so now.

[2] The location of special keys on the keyboard depends on the country where the computer was sold. It also depends on whether the computer is a PC or a Mac. In addition, notebooks tend to have fewer keys than desktop computers. Fun assignment: Find the tilde (`~`) on a Spanish and on a Hungarian keyboard.

2.3 Lines too wide

LaTeX reads the text in the source file one line at a time and when the end of a paragraph is reached, LaTeX typesets the entire paragraph. Occasionally, LaTeX gets into trouble when trying to split the paragraph into typeset lines. To illustrate this situation, modify `note1.tex`. In the second sentence, replace `term` by `strange term` and in the fourth sentence, delete `Rudi␣`, including the blank space following `Rudi`. Now save this modified file in your `work` folder using the name `note1b.tex`. You can also find `note1b.tex` in the `samples` folder (see page 4).

Typesetting `note1b.tex`, you obtain the following:

It is of some concern to me that the terminology used in multi-section math courses is not uniform.

In several sections of the course on matrix theory, the strange term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple". I invite others to comment on this problem.

Of special concern to me is the terminology in the course by Prof. Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

The first line of paragraph two is about $1/4$ inch too wide. The first line of paragraph three is even wider. In the `log` window, LaTeX displays the following messages:

```
 Overfull \hbox (15.38948pt
too wide) in paragraph at lines 9--15 []\OT1/cmr/m/n/10 In sev-eral
sec-tions of the course on ma-trix the-ory, the strange term
‘‘hamiltonian-

Overfull \hbox (23.27834pt too wide) in paragraph
at lines 16--21
[]\OT1/cmr/m/n/10 Of spe-cial con-cern to me is the
ter-mi-nol-ogy in the course by Prof. Hochschwabauer.
```

You will find the same messages in the `log` file (see Sections 1.3 and D.2.1).

The first message,

```
Overfull \hbox (15.38948pt too wide) in paragraph
at lines 9--15
```

refers to the second paragraph (lines 9–15 in the source file—its location in the typeset document is not specified). The typeset version of this paragraph has a line that is 15.38948 points too wide. LaTeX uses *points* (pt) to measure distances; there are about 72 points in 1 inch (or about 28 points in 1 cm).

The next two lines,

```
[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course
on ma-trix
the-ory, the strange term ‘‘hamiltonian-
```

identify the source of the problem: LaTeX did not properly hyphenate the word

```
hamiltonian-reduced
```

because it (automatically) hyphenates a hyphenated word *only at the hyphen.*

The second reference,

```
Overfull \hbox (23.27834pt too wide) in paragraph
at lines 16--21
```

is to the third paragraph (lines 16–21 of the source file). There is a problem with the word `Hochschwabauer`; LaTeX's standard hyphenation routine cannot handle it (a German hyphenation routine would have no difficulty hyphenating this name—see Appendix G). If you encounter such a problem, you can either try to reword the sentence or insert one or more *optional* (*or discretionary*) *hyphen commands* (`\-`), which tell LaTeX where it may hyphenate the word. In this case, you can rewrite `Hochschwabauer` as `Hoch\-schwa\-bauer` and the second hyphenation problem disappears. You can also utilize the `\hyphenation` command (see Section 5.4.9).

Sometimes a small horizontal overflow can be difficult to spot. The `draft` document class option may help (see Sections 11.5, 12.1.2, and 18.1 for more about document class options). LaTeX places a black box (or *slug*) in the margin to mark an overfull line. You can invoke this option by changing the `\documentclass` line to

```
\documentclass[draft]{sample}
```

A version of `note1b.tex` with this option can be found in the `samples` folder under the name `noteslug.tex`. Typeset it to see the "slugs".

2.4 More text features

Next, we produce the following note:

September 12, 2006

From the desk of George Grätzer

October 7–21 *please* use my temporary e-mail address:

`George_Gratzer@yahoo.com`

Type in the source file, without the line numbers. Save it as `note2.tex` in your `work` folder (`note2.tex` can be found in the `samples` folder—see page 4):

```
1  % Sample file: note2.tex
2  \documentclass{sample}
3
4  \begin{document}
5  \begin{flushright}
6     \today
7  \end{flushright}
8  \textbf{From the desk of George Gr\"{a}tzer}\\[22pt]
9  October~7--21 \emph{please} use my
10 temporary e-mail address:
11 \begin{center}
12    \texttt{George\_Gratzer@yahoo.com}
13 \end{center}
14 \end{document}
```

This note introduces several additional text features of LaTeX:

- The `\today` command (in line 6) to display the date on which the document is typeset (so you will see a date different from the date shown above in your own typeset document).
- The environments to *right justify* (lines 5–7) and *center* (lines 11-13) text.
- The commands to change the text style, including the `\emph` command (line 8) to *emphasize* text, the `\textbf` command (line 9) for **bold** text, and the `\texttt` command (line 12) to produce `typewriter style` text.

  These are *commands with arguments.* In each case, the argument of the command follows the name of the command and is typed between braces, that is, between `{` and `}`.
- The form of the LaTeX commands: Almost all LaTeX *commands* start with a backslash (`\`) followed by the *command name*. For instance, `\textbf` is a command and `textbf` is the command name. The command name is terminated by the first *non-alphabetic character*, that is, by any character other than a–z or A–Z. So `textbf1` is not a command name, in fact, `\textbf1` typesets as **1**. (Let us look at this a bit more closely. `\textbf` is a valid command. If a command needs an argument and is not followed by braces, then it takes the next character as its argument. So `\textbf1` is the command `\textbf` with the argument `1`, which typesets as bold `1`: **1**.) Note that command names are *case sensitive.* Typing `\Textbf` or `\TEXTBF` generates an error message.
- The multiple role of hyphens: Double hyphens are used for number ranges. For example, `7--21` (in line 9) typesets as 7–21. The punctuation mark – is called an *en*

dash. Use triple hyphens for the *em dash* punctuation mark—such as the one in this sentence.

- The *new line* command, \\ (or `\newline`): To create additional space between lines (as in the last note, under the line **From the desk...**), you can use the \\ command and specify an appropriate amount of vertical space: `\\[22pt]`. Note that this command uses *square brackets* rather than braces because the argument is *optional.* The distance may be given in points (`pt`), centimeters (`cm`), or inches (`in`). (There is an analogous *new page* command, `\newpage`, not used in this short note.)

- Special rules for special characters (see Section 2.1), for *accented characters* and for some *European characters.* For instance, the accented character ä is typed as `\"{a}`. Accents are explained in Section 5.4.7 (see also the tables in Section C.2).

When you need to know more about typing text than we have discussed here, see Chapters 5 and 6. See also Appendix C, where all text symbols are organized into tables. Recall that we also have the `SymbolTables.pdf` in the `samples` folder.

CHAPTER

3

Typing math

While marking up text in LaTeX is easy, marking up math is less intuitive because math formulas are two-dimensional constructs and we have to mark them up with a one-dimensional string of characters. However, even the most complicated two-dimensional formula is made up of fairly simple building blocks. So by concentrating on the building blocks—selectively, just learn the ones you need—you can get started with math quickly.

3.1 A note with math

In addition to the regular text keys and the 13 special keys discussed in Section 2.1, two more keys are used to type math:

< >

The formula $2 < |x| > y$ (typed as `$2 < |x| >y$`) uses both. Note that such math formulas, called *inline*, are enclosed by `$` symbols. We discuss shortly another kind of math formula called *displayed*.

We begin typesetting math with the following note:

In first-year calculus, we define intervals such as (u, v) and (u, ∞). Such an interval is a *neighborhood* of a if a is in the interval. Students should realize that ∞ is only a symbol, not a number. This is important since we soon introduce concepts such as $\lim_{x\to\infty} f(x)$.

When we introduce the derivative

$$\lim_{x\to a} \frac{f(x) - f(a)}{x - a},$$

we assume that the function is defined and continuous in a neighborhood of a.

To create the source file for this mixed text and math note, create a new document with your text editor. Name it `math.tex`, place it in the `work` folder, and type in the following source file—without the line numbers—or simply copy `math.tex` from the `samples` folder (see page 4):

```
 1  % Sample file: math.tex
 2  \documentclass{sample}
 3
 4  \begin{document}
 5  In first-year calculus, we   define intervals  such
 6  as  $(u, v)$ and $(u, \infty)$. Such an interval
 7  is a \emph{neighborhood} of  $a$
 8  if  $a$ is in the interval. Students should
 9  realize that  $\infty$ is only a
10  symbol, not a number. This is important since
11  we soon introduce concepts
12   such as $\lim_{x \to \infty} f(x)$.
13
14  When we introduce the derivative
15  \[
16     \lim_{x \to a} \frac{f(x) - f(a)}{x - a},
17  \]
18  we assume that the function is defined and
19  continuous in a neighborhood of  $a$.
20  \end{document}
```

This note introduces several basic concepts of math in LaTeX:

- There are two kinds of math formulas and environments in `math.tex`:
  - *Inline* math environments open and close with `$` (as seen throughout this book) or open with `\(` and close with `\)`.
  - *Displayed* math environments open with `\[` and close with `\]`.

- Within math environments, LaTeX uses its own spacing rules and completely ignores the white space you type, with two exceptions:
  - Spaces that terminate commands. So in `$\infty a$` the space is not ignored, `$\inftya$` produces an error.
  - Spaces in the arguments of commands that temporarily revert to regular text. `\text` is such a command (see Sections 3.3 and 7.4.6).

  The white space that you add when typing math is important only for the readability of the source file. We summarize with a simple rule.

Rule ■ Spacing in text and math
Many spaces equal one space in text, whereas your spacing is ignored in math, unless the space terminates a command.

- A math symbol is invoked by a command. For example, the command for ∞ is `\infty` and the command for $\to$ is `\to`. The math symbols are organized into tables in Appendix B (see also `SymbolTables.pdf` in the `samples` folder).
- Some commands, such as `\sqrt`, need *arguments* enclosed by `{` and `}`. To typeset $\sqrt{5}$, type `$\sqrt{5}$`, where `\sqrt` is the command and `5` is the argument. Some commands need more than one argument. To get

$$\frac{3+x}{5}$$

type

```
\[
   \frac{3+x}{5}
\]
```

where `\frac` is the command, `3+x` and `5` are the arguments—we indent for readability.

3.2 Errors in math

Even in such a simple note there are opportunities for errors. To help familiarize yourself with some of the most commonly seen LaTeX math errors and their causes, we deliberately introduce mistakes into `math.tex`. The version of `math.tex` with mistakes is `mathb.tex`. By inserting and deleting `%` signs, you make the mistakes visible to LaTeX one at a time—recall that lines starting with `%` are comments and are therefore ignored by LaTeX.

Type the following source file, and save it under the name `mathb.tex` in the `work` folder or copy the file `mathb.tex` from the `samples` folder (see page 4). Do not type the line numbers—they are shown here to help you with the experiments.

```
 1  % Sample file: mathb.tex
 2  \documentclass{sample}
 3
 4  \begin{document}
 5  In first-year calculus, we   define intervals  such
 6  % as $(u, v)$ and $(u, \infty)$. Such an interval
 7  as $(u, v)$ and  (u, \infty)$. Such an interval
 8  is a \emph{neighborhood} of $a$
 9  if $a$ is in the interval. Students should
10  realize that  $\infty$ is only a
11  symbol, not a number. This is important since
12  we soon introduce concepts
13   such as  $\lim_{x \to \infty} f(x)$.
14  %such as $\lim_{x \to \infty  f(x)$.
15
16  When we introduce the derivative
17  \[
18      \lim_{x \to a} \frac{f(x) - f(a)}{x - a}
19  %   \lim_{x \to a} \frac{f(x) - f(a)  x - a}
20  \]
21  we assume that the function is defined and
22  continuous in a neighborhood of  $a$.
23  \end{document}
```

Experiment 1 In line 7, the `$` before the `(u` is missing. Typeset the `mathb.tex` source file. LaTeX generates the following error message:

```
! Missing $ inserted.
<inserted text>
                $
l.7 as $(u, v)$ and  (u, \infty
                               )$. Such an interval
```

Since the `$` was omitted, LaTeX reads `(u, \infty)` as text; but the `\infty` command instructs LaTeX to typeset a math symbol, which can only be done in a math formula. So LaTeX offers to put a `$` in front of `\infty` while typesetting the source file—it does not put the `$` in the source file itself. LaTeX attempts a cure, but in this example it comes too late, because the math formula *should* start just before `(u`.

Whenever you see the `?` prompt, you may press Return to ignore the error and continue typesetting the document. Section D.4 lists a number of other options and prompts.

Experiment 2 Uncomment line 6 by deleting the % at the beginning of line 6 and comment out line 7 by inserting a % at the beginning of line 7. This eliminates the previous error. Uncomment line 14 and comment out line 13. This introduces a new error, the closing brace of the subscript is missing. Now typeset the note. You get the error message

```
! Missing } inserted.
<inserted text>
                }
l.14 such as $\lim_{x \to \infty f(x)$
```

LaTeX reports that a closing brace (`}`) is missing, but it is not sure where the brace should be. LaTeX noticed that a subscript (see page 23) started with `{`, but LaTeX reached the end of the math formula before finding a closing brace `}`. To remedy this, you must look in the formula for an opening brace `{` that is not balanced, and insert the missing closing brace `}`. Make the necessary change and typeset again to view the difference.

Experiment 3 Uncomment line 13 and comment out line 14, removing the previous error. Delete the % at the beginning of line 19 and insert a % at the beginning of line 18, introducing our final error, omitting the closing brace of the first argument and the opening brace of the second argument of `\frac`. Save and typeset the file. You get the error message

```
! Too many }'s.
\frac  #1#2->{\begingroup #1\endgroup \@@over #2}

l.20 \]
```

LaTeX got confused. The second line of the message explains that `\frac` has two arguments and it is not working out, but the error is incorrectly identified.

If the typo on line 19 is `\frac{f(x)-f(a) x-a}g`, then LaTeX produces

$$\frac{f(x) - f(a)x - a}{g}$$

and no error message is generated.

Experiment 4 Make sure all the errors are commented out. Typeset `mathb.tex`, testing that there are no errors. Now delete the two $ signs in line 22, that is, replace `$a$` by `a`. Typeset the file. It typesets with no errors. Here is the last line of the typeset file you get:

we assume that the function is defined and continuous in a neighborhood of a.

instead of

we assume that the function is defined and continuous in a neighborhood of a.

This is probably the error most often made by beginners. There is no error message by LaTeX and the typeset version looks good. You need sharp eyes to catch such an error.

See Section 4.3.1 for more information about finding and fixing problems in your LaTeX source files.

3.3 Building blocks of a formula

A formula is built from a large collection of components. We group them as follows:

- Arithmetic
  - Subscripts and superscripts
- Binomial coefficients
- Congruences
- Delimiters
- Ellipses
- Integrals
- Math accents
- Matrices
- Operators
  - Large operators
- Roots
- Text

In this section, I describe each of these groups, and provide examples illustrating their use.

Arithmetic The arithmetic operations $a + b$, $a - b$, $-a$, a/b, and ab are typed in the natural way (the spaces are typed only for readability, others may type fewer spaces):

```
$a + b$, $a - b$, $-a$, $a / b$, $a b$
```

If you wish to use $\cdot$ or $\times$ for multiplication, as in $a \cdot b$ or $a \times b$, use `\cdot` or `\times`, respectively. The expressions $a \cdot b$ and $a \times b$ are typed as follows:

```
$a \cdot b$  $a \times b$
```

Displayed fractions, such as

$$\frac{1 + 2x}{x + y + xy}$$

are typed with `\frac`:

```
\[
   \frac{1 + 2x}{x + y + xy}
\]
```

The `\frac` command is seldom used inline because it can disrupt the interline spacing of the paragraph.

Subscripts and superscripts Subscripts are typed with _ (underscore) and superscripts with ^ (caret). Subscripts and superscripts should be enclosed in braces, that is, typed between { and }. To get a_1, type `$a_{1}$`. Omitting the braces in this example causes no harm, but to get a_{10}, you *must* type `$a_{10}$`. Indeed, `$a_10$` is typeset as $a_1 0$. Further examples, a_{i_1}, a^2, a^{i_1}, a_n^2, are typed as

```
$a_{i_{1}}$, $a^{2}$, $a^{i_{1}}$, $a_{n}^{2}$
```

There is one symbol, the prime (’), that is automatically superscripted in math. To get $f'(x)$, just type `$f'(x)$`.

Binomial coefficients Binomial coefficients are typeset with the `\binom` command. For example, $\binom{a}{b+c}$ is typed inline as

```
$\binom{a}{b + c}$
```

whereas a displayed version,

$$\binom{\frac{n^2-1}{2}}{n+1}$$

is typed as

```
\[
   \binom{ \frac{n^{2} - 1}{2} }{n + 1}
\]
```

Congruences The two most important forms are

$a \equiv v \pmod{\theta}$ typed as `$a \equiv v \pmod{\theta}$`
$a \equiv v \pod{\theta}$ typed as `$a \equiv v \pod{\theta}$`

Delimiters Parentheses and square brackets are examples of delimiters. They are used to delimit some subformulas, as in `$[(a*b)+(c*d)]^{2}$`, which typesets as $[(a*b)+(c*d)]^2$. LaTeX can be instructed to expand them vertically to enclose a formula such as

$$\left(\frac{1 + x}{2 + y^2} \right)^2$$

which is typed as

```
\[
   \left( \frac{1 + x}{2 + y^{2}} \right)^{2}
\]
```

The `\left(` and `\right)` commands tell LaTeX to size the parentheses correctly, relative to the size of the symbols inside the parentheses. Two further examples,

$$\left| \frac{a + b}{2} \right|, \quad \left\| A^2 \right\|$$

would be typed as

```
\[
  \left| \frac{a + b}{2} \right|,
      \quad \left\| A^{2} \right\|
\]
```

where `\quad` is a spacing command (see Sections 8.1 and B.9).

Additional delimiters are listed in Sections 7.5 and B.6.

Ellipses The *ellipsis* (...) in text is provided by the `\dots` command:

A...Z is typed as `A \dots Z`

In formulas, the ellipsis is printed either as *low* (or *on-the-line*) *dots*:

$F(x_1, \ldots, x_n)$ is typed as `$F(x_{1}, \dots, x_{n})$`

or as centered dots:

$x_1 + \cdots + x_n$ is typed as `$x_{1} + \dots + x_{n}$`

The command `\dots` typesets the correct ellipsis with the correct spacing in most cases. If it does not, see Section 7.4.3 on how to specify the appropriate ellipsis from the four types available.

Integrals The command for an integral is `\int`. The lower limit is specified as a subscript and the upper limit is specified as a superscript. For example, the formula $\int_0^{\pi} \sin x \, dx = 2$ is typed as

```
$\int_{0}^{\pi} \sin x \, dx = 2$
```

where `\,` is a spacing command (see Sections 8.1 and B.9).

Math accents The four most frequently used math accents are:

$\bar{a}$ typed as `$\bar{a}$`

$\hat{a}$ typed as `$\hat{a}$`

$\tilde{a}$ typed as `$\tilde{a}$`

$\vec{a}$ typed as `$\vec{a}$`

See Sections 7.7 and B.8 for complete lists.

Matrices You type the matrix

$$\begin{matrix} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 134 \end{matrix}$$

with the `\matrix` command

```
\[
   \begin{matrix}
     a + b + c & uv    & x - y & 27\\
     a + b     & u + v & z     & 134
   \end{matrix}
\]
```

The `matrix` environment separates adjacent matrix elements within a row with ampersands (`&`). Rows are *separated* by new line commands (`\\`). Do not end the last row with a new line command!

The `matrix` environment has to appear within a math environment, as in the example. As a rule, it is in a displayed math environment, since inline it appears too large. It can be used in the `align` environment discussed in Section 3.4.2.

The `matrix` environment does not provide delimiters. Several variants do, including `pmatrix` and `vmatrix`. For example,

$$\mathbf{A} = \begin{pmatrix} a+b+c & uv \\ a+b & u+v \end{pmatrix} \begin{vmatrix} 30 & 7 \\ 3 & 17 \end{vmatrix}$$

is typed as follows:

```
\[
   \mathbf{A} =
   \begin{pmatrix}
     a + b + c & uv\\
     a + b & u + v
   \end{pmatrix}
   \begin{vmatrix}
     30 & 7\\
     3 & 17
   \end{vmatrix}
\]
```

As you can see, `pmatrix` typesets as a `matrix` between a pair of `\left(` and `\right)` commands, while `vmatrix` typesets as a `matrix` between a pair of `\left|` and `\right|` commands. See Section 9.7.1 for a listing of all the matrix variants.

Operators To typeset the sine function, $\sin x$, type `$\sin x$`.

Note that `$sin x$` would be typeset as $sinx$ because LaTeX interprets this expression as the product of four variables.

LaTeX calls `\sin` an *operator*. Sections 7.6.1 and B.7 list a number of operators. See Section 7.6.2 for user-defined operators. Some are just like `\sin`. Others produce a more complex display, for example,

$$\lim_{x \to 0} f(x) = 0$$

is typed as

```
\[
   \lim_{x \to 0} f(x) = 0
\]
```

Large operators The command for *sum* is `\sum` and for *product* is `\prod`. The following examples,

$$\sum_{i=1}^{n} x_i^2 \qquad \prod_{i=1}^{n} x_i^2$$

are typed as

```
\[
   \sum_{i=1}^{n} x_{i}^{2} \qquad
    \prod_{i=1}^{n} x_{i}^{2}
\]
```

where \qquad is a spacing command (see Sections 8.1 and B.9) used to separate the two formulas, yielding twice the space produced by \quad.

Sums and products are examples of *large operators.* They are typeset bigger when displayed than inline. They are listed in Sections 7.6.4 and B.7.1.

Roots \sqrt produces a square root. For instance, $\sqrt{a+2b}$ is typed as

```
$\sqrt{a + 2b}$
```

The n-th root, $\sqrt[n]{5}$, requires the use of an *optional argument,* which is specified using brackets (see Section 5.3.1): `$\sqrt[n]{5}$`.

Text You can include text in a formula with a \text command. For instance,

$$a = b, \qquad \text{by assumption}$$

is typed as

```
\[
   a = b, \text{\qquad by assumption}
\]
```

Note the spacing command \qquad in the argument of \text. You could also type

```
\[
   a = b, \qquad \text{by assumption}
\]
```

because \qquad works in math as well as in text (see Sections 8.1 and B.9).

3.4 Displayed formulas

3.4.1 Equations

The equation environment creates a displayed math formula and automatically generates an equation number. The equation

$$\int_0^{\pi} \sin x \, dx = 2 \tag{1}$$

is typed as

```
\begin{equation}\label{E:firstInt}
  \int_{0}^{\pi} \sin x \, dx = 2
\end{equation}
```

The equation number, which is automatically generated, depends on how many other numbered equations occur before the given equation.

To reference this formula without having to remember a number—which may change when you edit your document—give the equation a symbolic label by using the `\label` command and refer to the equation in your document by using the symbolic label, the argument of the `\label` command. In this example, I have called the first equation `firstInt` (first integral), and used the convention that the label of an equation starts with `E:`, so that the complete `\label` command is

```
\label{E:firstInt}
```

The number of this formula is referenced with the `\ref` command. Its page is referenced using the `\pageref` command. For example, to get

see (1) on page 27

type

```
see~(\ref{E:firstInt}) on page~\pageref{E:firstInt}
```

The `\eqref` command provides the reference number in parentheses. So the last example could be typed

```
see~\eqref{E:firstInt} on page~\pageref{E:firstInt}
```

The `\eqref` command is smart. Even if the equation number is referenced in emphasized or italicized text, the reference typesets upright (in roman type).

Note the use of the nonbreakable space (`~`) to ensure that when typeset the equation number is on the same line as the word `see`. (See the footnote on page 11.) You should always use a nonbreakable space to link a `\ref` command to the name of its part, for instance, equation, page, section, chapter. Use two nonbreakable spaces in

```
Sections~\ref{S:main} and~\ref{S:subsidiary}.
```

The main advantage of this cross-referencing system is that when you add, delete, or rearrange equations, LaTeX automatically renumbers the equations and adjusts the references that appear in your typeset document. You can split a long article into two or move a section to the end, and LaTeX takes care of the renumbering. This significantly reduces the amount of time you need to spend working on your document. It also reduces the potential for errors in the finished project.

Rule ■ Typeset twice

For renumbering to work, you have to typeset the source file twice.

The first run creates a list of references that need to be linked. The second creates the cross references and inserts the relevant text throughout the document (see Sections 18.2 and D.3.4). LaTeX issues a warning if you forget. Such warnings do not interrupt the typesetting, you only see them in the `log` window—if the window is visible—and in the `log` file. It is a good idea to check for warnings periodically.

An equation is numbered whether or not there is a `\label` command attached to it. Of course, if there is no `\label` command, the number generated for the equation by LaTeX cannot be referenced with the command `\ref` or `\eqref`.

The system described here is called *symbolic referencing.* The symbol for the number is the argument of the `\label` command, and that symbol can be referenced with `\ref`, `\eqref`, or `\pageref` commands. LaTeX uses the same mechanism for all of the generated numbering systems: sections, subsections, subsubsections, equations, theorems, lemmas, and bibliographic references—except that for bibliographic references, LaTeX uses the `\bibitem` command to define a bibliographic item and the `\cite` command to cite a bibliographic item (see Section 4.2.4 and Chapter 16).

What happens if you misspell a reference, e.g., typing `\ref{E:firstint}` instead of `\ref{E:firstInt}`? LaTeX typesets **??**. There are two warnings in the `log` file:

```
LaTeX Warning: Reference ‘E:firstint’ on page 39
        undefined on input line 475.
```

for the typeset page and the other one close to the end:

```
LaTeX Warning: There were undefined references.
```

If a `\cite` is misspelled, you get [**?**] and similar warnings.

Equations can also be *tagged* by attaching a name to the formula with the `\tag` command. The tag replaces the equation number.

For example,

(Int) $$\int_0^{\pi} \sin x \, dx = 2$$

is typed as

```
\begin{equation}
  \int_{0}^{\pi} \sin x \, dx = 2 \tag{Int}
\end{equation}
```

Tags (of the type discussed here) are *absolute.* This equation is *always* referred to as (Int). Equation numbers, on the other hand, are *relative,* they may change when equations are added, deleted, or rearranged.

3.4.2 Aligned formulas

LaTeX has many ways to typeset multiline formulas. We discuss three constructs in this section: *simple alignment, annotated alignment,* and *cases*. See Chapter 9 for many others.

For simple and annotated alignment we use the `align` environment. Each line in the `align` environment is a separate equation, which LaTeX automatically numbers.

Simple alignment

Simple alignment is used to align two or more formulas. To obtain the formulas

$$r^2 = s^2 + t^2, \tag{2}$$

$$2u + 1 = v + w^{\alpha}, \tag{3}$$

$$x = \frac{y + z}{\sqrt{s + 2u}}; \tag{4}$$

type the following, using `\\` as the *line separator* and `&` as the *alignment point:*

```
\begin{align}
  r^{2}  &= s^{2} + t^{2},              \label{E:Pyth}\\
  2u + 1 &= v + w^{\alpha},             \label{E:alpha}\\
       x &= \frac{y + z}{\sqrt{s + 2u}};\label{E:frac}
\end{align}
```

Note that you should not have a `\\` to terminate the last line.

Figure 3.1 displays the source and the typeset versions of formulas (2)–(4), emphasizing the alignment points of the source and the typeset formula. Of course, in the source, the alignment points do not have to line up.

These formulas are numbered (2), (3), and (4) because they are preceded by one numbered equation earlier in this section.

The `align` environment can also be used to break a long formula into two or more parts. Since numbering both lines in such a case would be undesirable, you can prevent the numbering of the second line by using the `\notag` command in the second part of the formula.

For example,

$$\begin{aligned} h(x) &= \int \left(\frac{f(x) + g(x)}{1 + f^2(x)} + \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}} \right) dx \\ &= \int \frac{1 + f(x)}{1 + g(x)}\, dx - 2\tan^{-1}(x - 2) \end{aligned} \tag{5}$$

is typed as follows:

```
\begin{align}
  h(x) &= \int \left( \frac{f(x) + g(x)}{1+ f^{2}(x)}
```

```
r^{2}  &= s^{2} + t^{2},                \label{E:Pyth}\\
2u + 1 &= v + w^{\alpha},               \label{E:alpha}\\
     x &= \frac{y + z}{\sqrt{s + 2u}};  \label{E:frac}
```

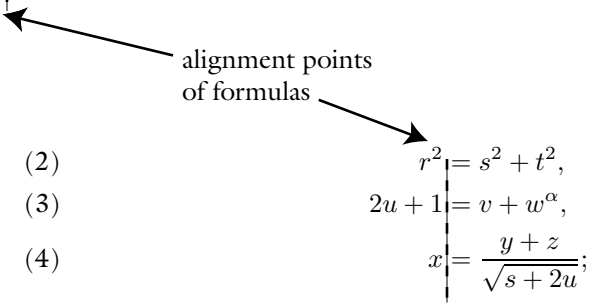

$$r^2 = s^2 + t^2, \tag{2}$$
$$2u + 1 = v + w^{\alpha}, \tag{3}$$
$$x = \frac{y + z}{\sqrt{s + 2u}}; \tag{4}$$

Figure 3.1: Simple alignment: source and typeset.

```
          + \frac{1+ f(x)g(x)}{\sqrt{1 - \sin x}}
          \right) \, dx\label{E:longInt}\\
       &= \int \frac{1 + f(x)}{1 + g(x) } \, dx
         - 2 \tan^{-1}(x-2)\notag
\end{align}
```

The rules for simple alignment are easy to remember.

Rule ■ Simple alignments

- Use the `align` environment.
- Separate the lines with `\\`.
- In each line, indicate the alignment point with `&`, one `&` per line. If the alignment point is adjacent to an $=$, $+$, and so on, place it *before* to ensure proper spacing.
- Place a `\notag` command in each line that you do not wish numbered.
- If no line should be numbered, use the `align*` environment.
- Place a `\label` command in each numbered line you may want to reference with `\ref`, `\eqref`, or `\pageref`.

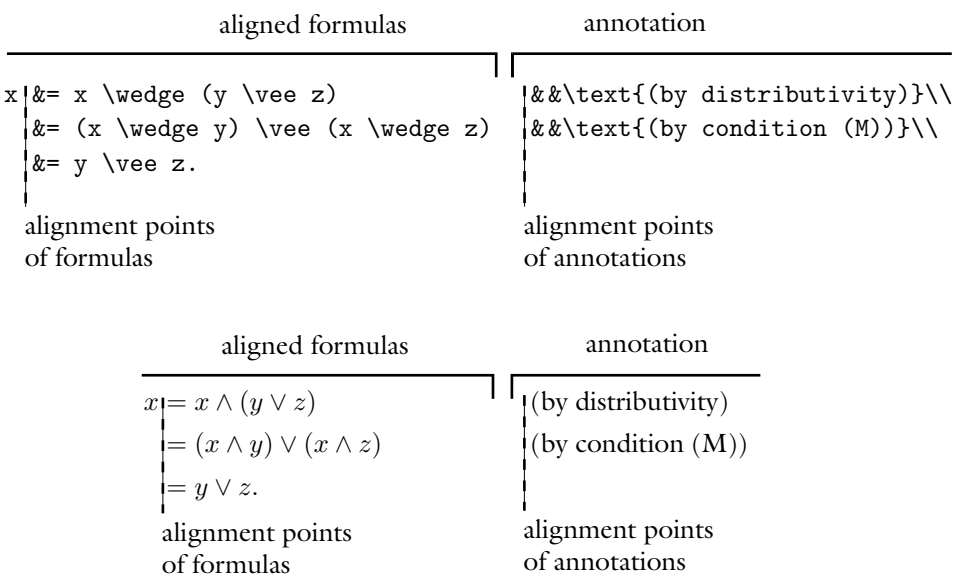

Figure 3.2: Annotated alignment: source and typeset.

Annotated alignment

Annotated alignment allows you to align formulas and their annotations, that is, explanatory text, separately (see Figure 3.2):

(6)
$$\begin{aligned} x &= x \wedge (y \vee z) && \text{(by distributivity)}\\ &= (x \wedge y) \vee (x \wedge z) && \text{(by condition (M))}\\ &= y \vee z. \end{aligned}$$

This example is typed as

```
\begin{align}
   x &= x \wedge (y \vee z)
    &&\text{(by distributivity)}\label{E:DoAlign}\\
   &= (x \wedge y) \vee (x \wedge z)
    &&\text{(by condition (M))} \notag\\
   &= y \vee z. \notag
\end{align}
```

The rules for annotated alignment are similar to the rules of simple alignment. In each line, in addition to the alignment point marked by `&`, there is also a mark for the start of the annotation: `&&`.

3.4.3 Cases

The `cases` construct is a specialized matrix. It has to appear within a math environment such as the `equation` environment (see Section 3.4.1) or the `align` environment (see Section 3.4.2). Here is a typical example:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \leq x \leq 1; \\ x^2, & \text{otherwise.} \end{cases}$$

is typed as follows:

```
\[
   f(x)=
   \begin{cases}
     -x^{2},         &\text{if $x < 0$;}\\
     \alpha + x,     &\text{if $0 \leq x \leq 1$;}\\
     x^{2},          &\text{otherwise.}
   \end{cases}
\]
```

Notice how you can put inline math, opened and closed with `$`, inside the argument of a `\text` command.

The rules for using the `cases` environment are the same as for matrices. Separate the lines with `\\` and indicate the annotation with `&`.

CHAPTER

4

Your first article and presentation

4.1 The anatomy of an article

To begin, we use the sample article `intrart.tex` (in the `samples` folder) to examine the anatomy of an article. Copy it over to the `work` folder or type it, and save it in the `work` folder as we discuss the parts of an article.

Every LaTeX article has two parts, the preamble and the body. The *preamble* of an article is everything from the first line of the source file down to the line

```
\begin{document}
```

For a schematic view of an article, see Figure 4.1.

The preamble contains instructions affecting the entire document. The *only* required command in the preamble is the `\documentclass` command. There are other commands (such as the `\usepackage` commands) that must be placed in the preamble if they are used, but these commands do not have to be present in every document.

Here is the preamble of the introductory sample article:

```
% Introductory sample article: intrart.tex

\documentclass{amsart}
\usepackage{amssymb,latexsym}
\usepackage{graphicx}
\newtheorem{theorem}{Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{definition}{Definition}
\newtheorem{notation}{Notation}
```

The preamble specifies the *document class* and then the LaTeX enhancements, or *packages,* used in the article. The preamble can also specify additional commands that are used throughout the document, such as proclamation definitions, user-defined commands, and so on.

`intrart.tex` specifies the `amsart` document class. This class defines the format used by the AMS journals—and many others—for articles. LaTeX then loads two pack-

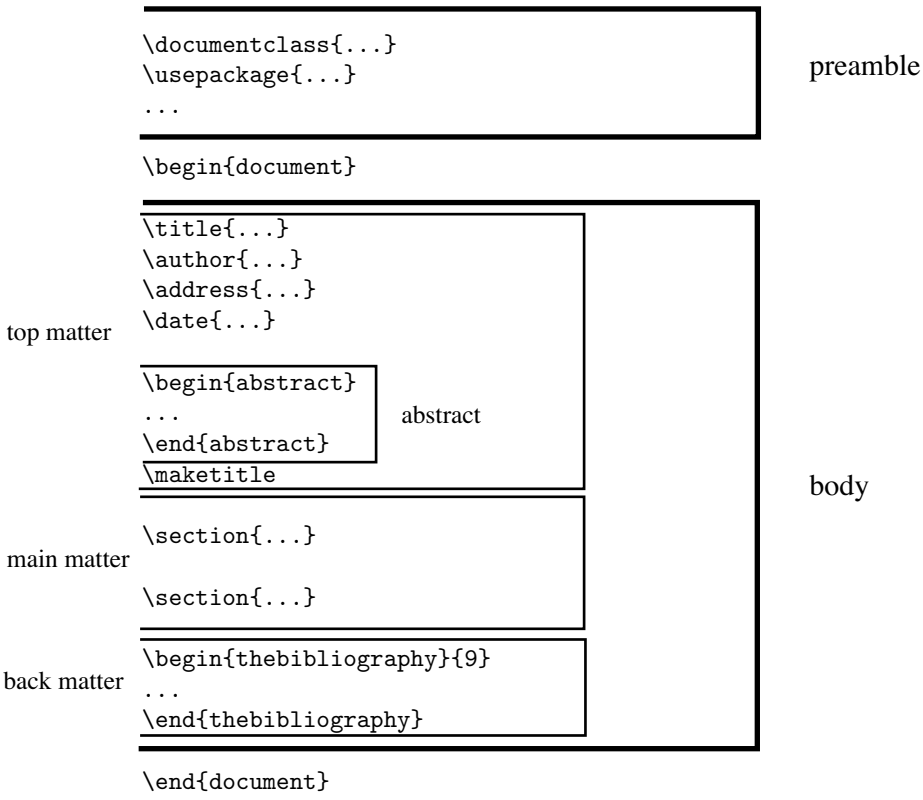

Figure 4.1: A schematic view of an article.

ages, `latexsym` and `amssymb`, that provide the names of some mathematical symbols. Finally, LaTeX loads the `graphicx` package, which we need because of the illustration.

The preamble concludes with the *proclamations*. A proclamation is a theorem, lemma, definition, corollary, note, or other similar construct. The `intrart.tex` article defines four proclamations. The first of these,

```
\newtheorem{theorem}{Theorem}
```

defines the `theorem` environment, which then can be used in the body of the article, as explained in Section 4.2.3. The other three are similar. LaTeX automatically numbers and formats proclamations.

The article proper, called the *body,* is the content of the `document` environment—it is between the lines

```
\begin{document}
```

and

```
\end{document}
```

as illustrated in Figure 4.1. The body of an article is split into several parts, starting with the *top matter* containing title page information and the abstract. The top matter follows the line

```
\begin{document}
```

and concludes with the line

```
\maketitle
```

Here is the top matter of the introductory sample article:

```
\title{A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
\date{March 15, 2006}

\begin{abstract}
In this note, we prove that there exist
\emph{complete-simple distributive lattices,}
that is, complete distributive lattices
with only two complete congruences.
\end{abstract}

\maketitle
```

And here is the rest of the body of the introductory sample article with some commentary, exclusive of the bibliography:

```
\section{Introduction}\label{S:intro}
In this note, we prove the following result:

\begin{theorem}
There exists an infinite complete distributive
lattice~$K$ with only the two trivial complete
congruence relations.
\end{theorem}

\section{The $\Pi^{*}$ construction}\label{S:P*}
The following construction is crucial in the proof
of our Theorem (see Figure~\ref{Fi:products}):

\begin{definition}\label{D:P*}
Let $D_{i}$, for $i \in I$, be complete distributive
lattices satisfying condition~\textup{(J)}. Their
$\Pi^{*}$ product is defined as follows:
\[
   \Pi^{*} ( D_{i} \mid i \in I ) =
   \Pi ( D_{i}^{-} \mid i \in I ) + 1;
\]
that is, $\Pi^{*} ( D_{i} \mid i \in I )$ is
$\Pi ( D_{i}^{-} \mid i \in I )$ with a new
unit element.
\end{definition}

\begin{notation}
If $i \in I$ and $d \in D_{i}^{-}$, then
\[
  \langle \dots, 0, \dots, d, \dots, 0, \dots \rangle
\]
is the element of $\Pi^{*} ( D_{i} \mid i \in I )$ whose
$i$-th component is $d$ and all the other components
are $0$.
\end{notation}

See also Ernest~T. Moynahan~\cite{eM57a}.

Next we verify the following result:
```

```
\begin{theorem}\label{T:P*}
Let $D_{i}$, $i \in I$, be complete distributive
lattices satisfying condition~\textup{(J)}.
Let $\Theta$ be a complete congruence relation on
$\Pi^{*} ( D_{i} \mid i \in I )$.
If there exist $i \in I$ and $d \in D_{i}$ with
$d < 1_{i}$ such that, for all $d \leq c < 1_{i}$,
\begin{equation}\label{E:cong1}
   \langle \dots, d, \dots, 0, \dots \rangle \equiv
   \langle \dots, c, \dots, 0, \dots \rangle
   \pod{\Theta},
\end{equation}
then $\Theta = \iota$.
\end{theorem}
```

We include an illustration, `products.eps` or `products.pdf` (in your `samples` folder). We copy them over to the `work` folder and load the `graphicx` package. We name the illustration in the `figure` environment. The illustration must be in the graphic image file formats EPS or PDF (see Chapter 13.1.2). We left the argument of the `\caption` command empty—it normally contains the name or a description of the figure. The illustration is centered with the `\centering` command (see Section 6.3).

```
\begin{figure}[hbt]
\centering\includegraphics{products}
\caption{}\label{Fi:products}
\end{figure}
```

The `figure` environment *floats,* that is, LaTeX decides where to place the typeset figure. We can influence LaTeX's choice (see Section 10.4.3).

Then we place a proof in a `proof` environment.

```
\begin{proof}
Since
\begin{equation}\label{E:cong2}
\langle \dots, d, \dots, 0, \dots \rangle \equiv
\langle \dots, c, \dots, 0, \dots \rangle
\pod{\Theta},
\end{equation}
and $\Theta$ is a complete congruence relation,
it follows from condition~(J) that
\begin{equation}\label{E:cong}
 \langle \dots, d, \dots, 0, \dots \rangle \equiv
 \bigvee ( \langle \dots, c, \dots, 0, \dots \rangle
 \mid d \leq c < 1 ) \pod{\Theta}.
```

```
\end{equation}

Let $j \in I$, $j \neq i$, and let $a \in D_{j}^{-}$.
Meeting both sides of the congruence \eqref{E:cong2}
with $\langle \dots, a, \dots, 0, \dots \rangle$,
we obtain that
\begin{equation}\label{E:comp}
   0 = \langle \dots, a, \dots, 0, \dots \rangle
     \pod{\Theta},
\end{equation}
Using the completeness of $\Theta$ and \eqref{E:comp},
we get:
\[
   0 \equiv \bigvee ( \langle \dots, a, \dots, 0,
     \dots \rangle \mid a \in D_{j}^{-} ) = 1
     \pod{\Theta},
\]
hence $\Theta = \iota$.
\end{proof}
```

At the end of the body, the *bibliographic entries* are typed between the lines

```
\begin{thebibliography}{9}
```

and

```
\end{thebibliography}
```

There are fewer than 10 references in this article, so we tell LaTeX to make room for single-digit numbering by providing the argument `9` to the `thebibliography` environment. We use `99` if the number of references is between 10 and 99. The typeset bibliography is titled References.

The bibliography of `intrart.tex` is structured as follows:

```
\begin{thebibliography}{9}

\bibitem{sF90}
Soo-Key Foo,
\emph{Lattice Constructions},
Ph.D. thesis,
University of Winnebago, Winnebago, MN, December, 1990.

\bibitem{gM68}
George~A. Menuhin,
```

```
\emph{Universal algebra}.
D.~Van Nostrand, Princeton, 1968.

\bibitem{eM57}
Ernest~T. Moynahan,
\emph{On a problem of M. Stone},
Acta Math. Acad. Sci. Hungar. \textbf{8} (1957),
455--460.

\bibitem{eM57a}
Ernest~T. Moynahan,
\emph{Ideals and congruence relations in
lattices}. II,
Magyar Tud. Akad. Mat. Fiz. Oszt. K\"{o}zl.
\textbf{9} (1957), 417--434.

\end{thebibliography}
```

The body and the article end when the `document` environment is closed with

```
\end{document}
```

4.1.1 The typeset sample article

On the next two pages, you find the typeset `intrart.tex`, the introductory sample article.

A CONSTRUCTION OF COMPLETE-SIMPLE DISTRIBUTIVE LATTICES

GEORGE A. MENUHIN

Abstract. In this note, we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices with only two complete congruences.

1. Introduction

In this note, we prove the following result:

Theorem 1. *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2. The Π^* construction

The following construction is crucial in the proof of our Theorem (see Figure 1):

Definition 1. *Let D_i, for $i \in I$, be complete distributive lattices satisfying condition* (J). *Their* Π^* *product is defined as follows:*

$$\Pi^*(D_i \mid i \in I) = \Pi(D_i^- \mid i \in I) + 1;$$

that is, $\Pi^*(D_i \mid i \in I)$ is $\Pi(D_i^- \mid i \in I)$ with a new unit element.

Notation 1. *If $i \in I$ and $d \in D_i^-$, then*

$$\langle \dots, 0, \dots, d, \dots, 0, \dots \rangle$$

is the element of $\Pi^*(D_i \mid i \in I)$ whose i-th component is d and all the other components are 0.

See also Ernest T. Moynahan [4].

Next we verify the following result:

Theorem 2. *Let D_i, $i \in I$, be complete distributive lattices satisfying condition* (J). *Let Θ be a complete congruence relation on $\Pi^*(D_i \mid i \in I)$. If there exist $i \in I$ and $d \in D_i$ with $d < 1_i$ such that, for all $d \le c < 1_i$,*

$$\langle \dots, d, \dots, 0, \dots \rangle \equiv \langle \dots, c, \dots, 0, \dots \rangle \quad (\Theta), \tag{1}$$

then $\Theta = \iota$.

Proof. Since

$$\langle \dots, d, \dots, 0, \dots \rangle \equiv \langle \dots, c, \dots, 0, \dots \rangle \quad (\Theta), \tag{2}$$

and Θ is a complete congruence relation, it follows from condition (J) that

$$\langle \dots, d, \dots, 0, \dots \rangle \equiv \bigvee(\langle \dots, c, \dots, 0, \dots \rangle \mid d \le c < 1) \quad (\Theta). \tag{3}$$

Date: March 15, 2006.

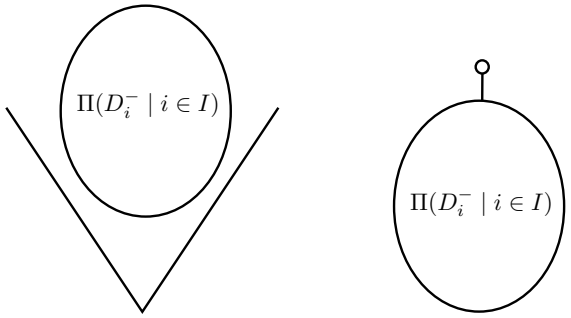

FIGURE 1

Let $j \in I$, $j \neq i$, and let $a \in D_j^-$. Meeting both sides of the congruence (2) with $\langle \dots, a, \dots, 0, \dots \rangle$, we obtain that

$$0 = \langle \dots, a, \dots, 0, \dots \rangle \quad (\Theta), \tag{4}$$

Using the completeness of Θ and (4), we get:

$$0 \equiv \bigvee (\langle \dots, a, \dots, 0, \dots \rangle \mid a \in D_j^-) = 1 \quad (\Theta),$$

hence $\Theta = \iota$. □

REFERENCES

[1] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December, 1990.
[2] George A. Menuhin, *Universal algebra*. D. Van Nostrand, Princeton, 1968.
[3] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
[4] Ernest T. Moynahan, *Ideals and congruence relations in lattices*. II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **9** (1957), 417–434.

COMPUTER SCIENCE DEPARTMENT, UNIVERSITY OF WINNEBAGO, WINNEBAGO, MN 53714

4.2 An article template

In this section, you create an article template. To start a new article, open the template and start writing!

Make a copy of `intrart.tex` and give the copy an appropriate name. I named mine `gg.tex` (it is in the `samples` folder). Remember the naming rule (page 4): The name should have no spaces, no special characters, and end with `.tex`. So the name `my template.tex` is not good, but `MyTemplate.tex` is fine.

4.2.1 Editing the top matter

Edit the top matter to contain the relevant information, e.g., title and address, for your template. Here are some simple rules to follow.

Rule ■ Top matter

1. `\thanks` places an unmarked footnote at the bottom of the first page, for instance to acknowledge research support. If it is not needed, comment it out.
2. Separate the lines of your address with `\\`. Do not put a `\\` at the end of the last line.
3. `\date{\today}` typesets today's date. If you do not want *any* date to appear, comment out the `\date` command. For a specific date, such as March 15, 2006, type `\date{March 15, 2006}`.
4. The `\title` command is the only required command. The others are optional.

Actually, if you do not give the `\maketitle` command, even the `\title` command is optional. On the other hand, if you do give the `\maketitle` command and omit the `\title` command, then you get the error message

```
! Undefined control sequence.
<argument> \shorttitle

l.27 \maketitle
```

Now delete all the content of the article, leaving you with the skeleton. Here is the edited `gg.tex` (it is in your `samples` folder):

```
% GG's article template: gg.tex

\documentclass{amsart}
\usepackage{amssymb,latexsym}
\usepackage{graphicx}
```

```
\newtheorem{theorem}{Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{definition}{Definition}
\newtheorem{notation}{Notation}

\begin{document}
\title{Title!}
\author{George Gr\"{a}tzer}
\address{Department of Mathematics\\
         University of Manitoba\\
         Winnipeg, MB R3T 2N2\\
         Canada}
\date{\today}

\begin{abstract}
To come!
\end{abstract}

\maketitle

\section{Introduction}\label{S:intro}

\begin{thebibliography}{9}

\end{thebibliography}

\end{document}
```

I also made a version for a joint article with another author: `gg2.tex` (see the `samples` folder). It adds the lines

```
\author{Second author}
\address{line1\\
         line2\\
         line3\\
         line4}
```

before the `\date` command.

When I start writing an article, I open `gg.tex` or `gg2.tex`, save it under a new name, and edit the top matter. Here are two more rules about the top matter to keep in mind:

Rule ■ Top matter (continued)

5. If necessary, break the title into separate lines with `\\`. Do not put a `\\` at the end of the last line.

6. Multiple authors get separate `\author` and `\address` commands.

4.2.2 Sectioning

An article, as a rule, is divided into sections. To start the section Introduction, type

```
\section{Introduction}\label{S:intro}
```

after the `\maketitle` command. `Introduction` typesets as the title of the section. I use the convention that `S:` starts the label for a section, so the label is `S:intro` (or something similar). The section's number is automatically assigned by LaTeX. You can refer to this section number with `\ref{S:intro}`:

```
In Section~\ref{S:intro}, we introduce
```

The command `\section*` produces an unnumbered section.

Sections have subsections, and subsections have subsubsections. The corresponding commands are

```
\subsection  \subsubsection
```

Their unnumbered variants are

```
\subsection*  \subsubsection*
```

4.2.3 Invoking proclamations

In the preamble of the article `intrart.tex`, we defined the theorem, lemma, definition, and notation proclamations. These proclamations define environments.

For example, you type a theorem within a `theorem` environment. The body of the theorem, that is, the part of the source file that produces the theorem, is typed between the lines

```
\begin{theorem}\label{T:xxx}
```

and

```
\end{theorem}
```

where `T:`*xxx* is the label for the theorem. You should replace *xxx* with a label that is somewhat descriptive of the contents of your theorem. LaTeX automatically assigns a number to the theorem, and the theorem can be referenced by using a command of the form `\ref{T:`*xxx*`}`.

4.2.4 Inserting references

The works to be listed are placed in the bibliography. Below are typical entries for the most frequently used types of references, an article in a journal, a book, a Ph.D. thesis, and a technical report. For more examples, see the bibliographic template file, `bibl.tpl`, in the `samples` folder.

```
\begin{thebibliography}{9}
   \bibitem{sF90}
      Soo-Key Foo,
      \emph{Lattice Constructions},
      Ph.D. thesis,
      University of Winnebago, Winnebago, MN,
      December, 1990.
   \bibitem{gM68}
      George~A. Menuhin,
      \emph{Universal algebra}.
      D.~Van Nostrand, Princeton, 1968.
   \bibitem{eM57}
      Ernest~T. Moynahan,
      \emph{On a problem of M. Stone},
      Acta Math. Acad. Sci. Hungar. \textbf{8} (1957),
      455--460.
   \bibitem{eM57a}
      Ernest~T. Moynahan,
      \emph{Ideals and congruence relations in
      lattices.} II,
      Magyar Tud. Akad. Mat. Fiz. Oszt. K\"{o}zl.
      \textbf{9} (1957), 417--434.
\end{thebibliography}
```

Each item listed in the bibliography can be referenced in the body of the article. You reference with the `\cite` command. The argument is the argument of the `\bibitem` command. So to reference Menuhin's article, type

```
\cite{gM68}
```

which typesets as [2] since Menuhin's article is the second in the list. So

> this result was first published in [2]

is typed as

```
this result was first published in~\cite{gM68}
```

How you write each label is up to you, subject only to the rule in Section 10.4.2, provided the labels are unique. I use the convention that the label for a `\bibitem` consists of the initials of the author and the year of publication. For example, a publication by Andrew B. Reich in 1987 would have the label `aR87` (a second publication by that author from that year would be `aR87a`). For joint publications, the label consists of the initials of the authors and the year of publication. For example, a publication by John Bradford and Andrew B. Reich in 1987 would have the label `BR87`.

You have to arrange the references in your document's `thebibliography` environment in the order you wish to see them. LaTeX only takes care of the numbering and the citations in the text.

4.3 On using LaTeX

Now that you are ready to type your first article, we give you some pointers on using LaTeX.

4.3.1 LaTeX error messages

You probably make a number of mistakes in your first article. These mistakes fall into the following categories:

1. Typographical errors, which LaTeX blindly typesets
2. Errors in mathematical formulas or in the formatting of the text
3. Errors in your instructions to LaTeX, that is, in commands and environments

Typographical errors can be corrected by viewing and spell checking the typeset article, finding the errors, and then editing the source file.

Mistakes in the second and third categories probably trigger errors during the typesetting process, such as the math errors in Section 3.2. Some of these mistakes may have to be corrected before your article can be completely typeset.

We now look at some examples of the third class of errors by deliberately introducing a number of mistakes into the source file of the article `intrart.tex` (in your `samples` folder, source file on pages 35–41, and shown typeset on pages 42–43), and examining the error messages that occur.

When LaTeX displays a `?` prompt, you can either try to continue typesetting the document by pressing Return, or type `x` to stop typesetting immediately. See Section D.4 for other options.

Experiment 1 In `intrart.tex`, go to line 20 by using your editor's `Go to Line` command and remove the closing brace so that it reads

```
\begin{abstract
```

When you typeset `intrart.tex`, LaTeX reports a problem:

```
Runaway argument?
{abstract In this note, we prove that there exist
\emph {complete-sim\ETC.
! Paragraph ended before \begin was complete.
<to be read again>
                   \par
l.26
```

Line 26 of the file is the line after `\end{abstract}`. The error message informs you that the name of the environment that ends before line 26 is not completed before the end of the paragraph. Press Return to tell LaTeX to typeset the remainder of the article, leaving out the abstract.

`Runaway argument?` is an error message that comes up often. It usually means that the argument of a command is either longer than expected or it contains material that the argument cannot accept. Most often a closing brace solves the problem, as in the experiment.

Experiment 2 Now correct line 20, then go to line 25 and change it from

```
\end{abstract}
```

to

```
\end{abstrac}
```

and typeset the article again. LaTeX informs you of another error:

```
! LaTeX Error: \begin{abstract} on input line 20
ended by \end{abstrac}.


l.25 \end{abstrac}
```

This is perfect. LaTeX correctly analyzes the problem and tells you where to make the change.

You may continue typesetting the article by pressing Return. LaTeX then gives you the message:

```
! Missing } inserted.
<inserted text>
                }
l.25 \end{abstrac}
```

The missing `}` inserted is the "special brace" `\end{abstract}` (more about this in Section 5.3.2). Press Return. LaTeX recovers from this error and the article is typeset correctly.

Experiment 3 Instead of correcting the error in line 25, comment it out with

```
% \end{abstrac}
```

and also comment out the four lines of the `figure` environment using block comment. Introduce an additional error in line 96. This line reads

```
and $\Theta$ is a complete congruence relation,
```

Change `\Theta` to `\Teta`:

```
and $\Teta$ is a complete congruence relation,
```

Now, when you typeset the article, LaTeX reports

```
! Undefined control sequence.
<recently read>\Teta

l.96 and $\Teta
               $ is a complete congruence relation,
```

Pressing Return results in the message

```
! LaTeX Error: \begin{abstract} on input line 20
ended by \end{document}.

Type  H <return>  for immediate help.
 ...

l.150 \end{document}
```

These two mistakes are easy to identify: `\Teta` is a misspelling of `\Theta`, and since `\end{abstract}` is missing, LaTeX is trying to match

```
\begin{abstract}
```

with

```
\end{document}
```

Now undo the changes you made to lines 25 and 96. Uncomment the figure.

Experiment 4 In line 42, delete the closing brace of the `\label` command:

```
\begin{definition}\label{D:P*
```

This results in a message for line 54, the blank line following the paragraph, that

```
! Paragraph ended before \label was complete.
```

This is easy to understand. You cannot begin a new paragraph within the argument of a `\label` command.

Undo the change to line 42.

Experiment 5 Add a blank line following line 58:

```
\langle \dots, 0, \dots, d, \dots, 0, \dots \rangle
```

This change results in the message

```
! Missing $ inserted.
<inserted text>
                $
l.59
```

There can be no blank lines within a displayed math environment. LaTeX catches the mistake, but the message itself is misleading. Pressing Return does not help; you cannot recover from the error. Delete the blank line.

Experiment 6 Add a $ somewhere in line 58 (such errors often occur when cutting and pasting formulas):

```
\langle $\dots, 0, \dots, d, \dots, 0, \dots \rangle
```

You get the message:

```
! Display math should end with $$.
<to be read again>
                   \protect
l.58   \langle $\dots
                  , 0, \dots, d, \dots, 0, \dots \rangle
```

Maybe this could be more to the point?

Error messages from LaTeX are not always helpful, but there is always some information that can be gleaned from them. Try to identify the structure, that is, the command or environment, that causes the error—read the section of this book that describes that command or environment. This should help you correct the error. Keep in mind that the error could be quite far from the line LaTeX indicates, but it is always on or before that line in the source file.

If you have difficulty isolating a problem, block comment all but the paragraph you suspect might have problems. If necessary, split a large paragraph into smaller pieces.

Tip Typeset often.

To some extent, you can avoid having to isolate problems by following this tip. For instance, if I were to typeset *First Steps into LaTeX* [29], with the closing brace of the first `\caption` command on line 480 of the source file missing, I would get the error message

```
! Text line contains an invalid character.
l.1227 ...pletely irreducible^^?
```

where the reference is to line 1227, about 700 lines removed from the actual error. However, if the only thing I did before typesetting was to insert that figure with its incorrect caption command, at least I would know where to look for errors. If you make a dozen corrections and then typeset, you may not know where to start.

4.3.2 Logical and visual design

The typeset version of `intrart.tex` (pp. 42–43) looks impressive. To produce such articles, you need to understand that there are two aspects to article design: *visual* and *logical*.

As an example, let us look at a theorem from `intrart.tex` (see the typeset form of the theorem on page 43). You tell LaTeX that you want to state a theorem by using a `theorem` environment:

```
\begin{theorem}\label{T:P*}
Let $D_{i}$, $i \in I$, be complete distributive
lattices satisfying condition~\textup{(J)}.
Let $\Theta$ be a complete congruence relation on
$\Pi^{*} ( D_{i} \mid i \in I )$.
If there exist $i \in I$ and $d \in D_{i}$ with
$d < 1_{i}$ such that, for all $d \leq c < 1_{i}$,
\begin{equation}\label{E:cong1}
   \langle \dots, d, \dots, 0, \dots \rangle \equiv
   \langle \dots, c, \dots, 0, \dots \rangle
   \pod{\Theta},
\end{equation}
then $\Theta = \iota$.
\end{theorem}
```

The logical part of the design is choosing to define a theorem by placing material inside a `theorem` environment. For the visual design, LaTeX makes hundreds of decisions. Could you have specified all of the spacing, font size changes, centering, numbering, and so on? Maybe, but would you *want* to? And would you want to repeat that process for every theorem in your document?

Even if you did, you would have spent a great deal of time and energy on the *visual design* of the theorem rather than on the *logical design* of your article. The idea

behind LaTeX is that you should concentrate on what you have to say and let LaTeX take care of the visual design.

This approach allows you to easily alter the visual design by changing the document class (or its options, see Sections 11.5, 12.1.2, and 18.1). Section 11.1 provides some examples. If you code the visual design into the article—hard coding it, as a programmer would say—such changes are much harder to accomplish, for you and for the journal publishing the article.

4.4 Converting an article to a presentation

To produce a document in LaTeX for use as a presentation, you have to output it as a PDF file. You make your presentation using a PDF viewer such as Adobe Reader or print the pages of the PDF file on transparencies and use a projector.

So a *presentation* is a PDF file. To display the presentation, connect your computer to a projector. Open the PDF file in Adobe Reader, put it in full screen mode. Then project the presentation a page at a time by pressing the space bar or the forward and back arrow keys.

In LaTeX, you use a presentation package—really, a document class—to prepare such a PDF file. We deal with presentations in detail in Chapter 14, but as a quick introduction, we convert `intrart.tex` into a presentation.

For the conversion, we use the presentation package FoilTeX, while in Chapter 14 we discuss the `beamer` package. To use the FoilTeX package, we have to learn only one new command, `\foilhead`.

Open `intrart.tex`, save it as `intropres.tex` in the `work` folder. We introduce some changes to the document to prepare it for the conversion. Once you are satisfied with the changes made, the `tex` file created for FoilTeX is typeset so as to produce the PDF file. For `WinEdt`, click on the `PDF TeXify` icon. For `TeXShop`, just click on `Typeset`. For other TeX installations, check your user manual on how to create a PDF output.

4.4.1 Preliminary changes

Make the following changes in the preamble, top matter, and abstract.

1. Change the first line to
   `% Introductory presentation:intropres.tex`
2. Change the documentclass to `foils`.
3. Add the line
   `\usepackage{amsmath}`
   after the documentclass line. We have to do this because FoilTeX does not automatically load the AMS math package.

4. Delete the definitions of `theorem`, `lemma`, and `definition`. FoilTEX redefines these.

5. Copy the address into the `\author` command:

   ```
   \author{George~A. Menuhin\\
                Computer Science Department\\
                University of Winnebago\\
                Winnebago, MN 53714}
   ```

   and delete the `\address` command. This may seem strange, but it is necessary because FoilTEX is based on a legacy document class that does not have an `\address` command (see Chapter 12).

6. Move the abstract after the `\maketitle` command, as was customary in legacy document classes.

7. Add the `[scale=2]` option to the `\includegraphics` command, so the command becomes

   ```
   \centering\includegraphics[scale=2]{products}
   ```

   FoilTEX uses fonts in 20 point size, twice the usual size. So it is appropriate that we scale up the illustration to 200%.

So the new version is

```
% Introductory presentation:intropres.tex

\documentclass{foils}
\usepackage{amsmath}
\usepackage{amssymb,latexsym}
\usepackage{graphicx}

\begin{document}
\title{A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin\\
                Computer Science Department\\
                University of Winnebago\\
                Winnebago, MN 53714}
\date{March 15, 2006}

\maketitle
\begin{abstract}
   In this presentation, we prove that there exist
```

```
   \emph{complete-simple distributive lattices,}
   that is, complete distributive lattices
   with only two complete congruences.
\end{abstract}
```

Declarations in the body

In your LaTeX editor, perform four search and replace operations in the body of the article. Change all of the following:

1. `{theorem}` to `{Theorem}`
2. `{lemma}` to `{Lemma}`
3. `{definition}` to `{Definition}`
4. `{proof}` to `{Proof}`

FoilTeX defines and uses the capitalized versions.

Sectioning

Comment out all the `\section` commands. FoilTeX uses the `\foilhead` command to break the material into pages and also as a substitute for sectioning.

4.4.2 Making the pages

We cut the presentation into pages (transparencies or foils) by inserting as many page breaking commands of FoilTeX, `\foilhead{}`, as seems appropriate. The argument of the command becomes the "title" for the page. If the argument is empty, the page has no title.

Add the `\foilhead{The result}` command after the abstract. This ends the title page and adds the title The result to the next page.

See the `intropres.tex` document for all the other `\foilhead{}` commands we have added.

4.4.3 Fine tuning

We have eliminated the equation numbering, because it would make the equations too wide. Also, in a presentation, references to another page are not recommended. We made some additional changes to accommodate that we have fewer characters per line. Compare the documents `intrart.tex` and `intropres.tex` to see all the changes. Note how in the PDF file the fonts are automatically changed to sans serif, because sans serif text is easier to read when projected. The font size is 20pt, twice the size of the font in the article.

Of course, `intropres.tex` is not the most elegant presentation. But I hope it helps you to make your first presentation. On pages 57 and 58, we show the first two pages of this presentation.

There are, of course, a number of useful commands in FoilTEX in addition to the one we used, `\foilhead`. We did not even do justice to this one command. It has an optional argument to enlarge or shrink the space between the header and the body of the foil. So

```
\foilhead[-.5in]{A diagram}
```

shrinks that space by half an inch. This is especially useful with large diagrams.

For numerous other features of FoilTEX, see the user manual [33].

A construction of complete-simple distributive lattices

George A. Menuhin
Computer Science Department
University of Winnebago
Winnebago, MN 53714

March 15, 2006

Abstract

In this presentation, we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices with only two complete congruences.

– Typeset by FoilTEX –

The result

In this presentation, we prove the following result:

Theorem 1. *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

CHAPTER

5

Typing text

In Chapter 2, we briefly discussed how to type text in a document. Now we take up this topic more fully.

This chapter starts with a discussion of the keyboard in Section 5.1 and continues with the rules for spaces in Section 5.2. We cover a very important topic that must precede any in-depth discussion of LaTeX, how to control LaTeX with commands and environments, in Section 5.3.

A document may contain symbols that cannot be found on your keyboard. In Section 5.4, we show how to get these symbols in our typeset documents by using commands.

Some other characters are defined by LaTeX as command characters. For example, the % character plays a special role in the source document. In Section 5.5.1, you will see how % is used to comment out lines. In Section 5.5.2, we introduce the command for footnotes.

In Section 5.6, we discuss the commands (and environments) for changing fonts, their shapes and sizes. In Section 5.7, you learn about lines, paragraphs, and pages. The judicious use of horizontal and vertical spacing is an important part of document

formatting, and also the topic of Section 5.8. In Section 5.9, you learn how to typeset text in a "box", which behaves as if it were a single large character.

To help the discussion along, we shall use the terms *text mode* and *math mode* to distinguish between typesetting text and math.

5.1 The keyboard

Most of the keys on your computer's keyboard produce characters, while others are function or modifier keys.

5.1.1 Basic keys

The basic keys are grouped as follows:

Letters The 52 letter keys:

```
a  b  c ... z     A  B  C ... Z
```

Digits The ten digits:

```
1  2 ... 9  0
```

Old-style digits are available with the `\oldstylenums` command. The next line shows the default digits followed by the old style digits:

1234567890 1234567890

typed as

```
1234567890 \quad \oldstylenums{1234567890}
```

Punctuation There are nine punctuation marks:

```
,  ;  .  ?  !  :  ‘  ’  -
```

The first six are the usual punctuation marks. The ‘ is the *left single quote*—also known as the *grave accent*—while ’ doubles as the *right single quote* and *apostrophe* (see Section 5.4.1). The - key is the *dash* or *hyphen* (see Sections 5.4.2 and 5.4.9).

Parentheses There are four:

```
(  )  [  ]
```

(and) are *parentheses;* [and] are called (*square*) *brackets.*

Math symbols Seven math symbols correspond to keys. The math symbols are:

$* \quad + \quad = \quad - \quad < \quad > \quad /$

The last four characters have a role also in text mode:

- The minus sign $-$ corresponds to the hyphen key, - (see Section 7.4.1).
- The math symbols $<$ and $>$ correspond to the keys < and >; use them only in math mode.

Note that there is also a version of colon (:) for math formulas (see Sections 8.1 and B.2).

Space keys Pressing the space bar gives the *space character*. Pressing the tab key gives the *tab character*. When typesetting the source file, LaTeX does not distinguish between these two. Pressing the *Return* key gives the *end-of-line character*.

These keys produce *invisible characters* that are normally not displayed on your monitor by the text editor. Different computer systems have different end-of-line characters, which may cause some problems when transferring files from one system to another. A good text editor translates end-of-line characters automatically or on demand. Section 5.2.1 explains how LaTeX handles the invisible characters.

When explaining some rules of LaTeX, sometimes it is important to show if a space is required. In such cases, I use the symbol ␣ to indicate a space, for instance, `\in␣ut` and `\␣`.

The tilde ~ produces a *nonbreakable space* or *tie* (see Section 5.4.3 and the footnote on page 11).

5.1.2 Special keys

There are 13 special keys on the keyboard:

```
# $ % & ~ _ ^ \ { } @ " |
```

They are mostly used to give instructions to LaTeX and some are used in math mode (see Chapter 7), and some in BibTeX (see Chapter 16). See Section 5.4.4 on how to print these characters in text. Only @ requires no special command, type `@` to print @.

5.1.3 Prohibited keys

Keys other than those discussed in Sections 5.1.1 and 5.1.2 are prohibited! Specifically, do not use the computer's modifier keys—Control, Alt, Escape, and others—to produce special characters, such as accented characters. LaTeX will either reject or misunderstand them.

Prohibited characters may not cause problems in some newer LaTeX implementations. They may just print Ł if your source file has Ł, and ignore the invisible invalid characters. However, for portability reasons, you should avoid using prohibited characters.

The `babel` package provides support for using some modifier keys (see Appendix G).

Tip If there is a prohibited character in your document, you may receive an error message such as

```
! Text line contains an invalid character.
l.222 completely irreducible^^?
                                ^^?
```

Delete and retype the offending word or line until the error goes away.

5.2 Words, sentences, and paragraphs

Text consists of words, sentences, and paragraphs. In text, *words* are separated by one or more spaces, which may include a single end-of-line character (see the rule, **Spacing in text**), or by parentheses and punctuation marks. A group of words terminated by a period, exclamation point, or question mark forms a *sentence* (not all periods terminate a sentence, see the discussion in Section 5.2.2). A group of sentences terminated by one or more blank lines constitutes a *paragraph.*

5.2.1 Spacing rules

Here are the most important LaTeX rules about spaces in text in the source file.

Rule ■ Spacing in text

1. Two or more spaces in text are the same as one.
2. A tab or end-of-line character is the same as a space.
3. A blank line, that is, two end-of-line characters separated only by spaces and tabs, indicates the end of a paragraph. The `\par` command is equivalent.
4. Spaces at the beginning of a line are ignored.

Rules 1 and 2 make cutting and pasting text less error-prone. In your source file, you do not have to worry about the line length or the number of spaces separating words

or sentences, as long as there is at least one space or end-of-line character separating any two words. Thus

```
 You   do not have to    worry
 about the number of   spaces
separating words, as long as there
is   at least one space or end-of-line character
separating  any two words.
```

produces the same typeset text as

```
You do not have to worry about the number of spaces
separating words, as long as there is at least one space
or end-of-line character separating any two words.
```

However,

```
the number of   spaces separating words,
as long
```

and

```
the number of   spaces separating words
, as long
```

produce different results:



the number of spaces separating words, as long
the number of spaces separating words , as long

Notice the space between "words" and the comma in the second line. That space was produced by the end-of-line character in accordance with Rule 2.

It is very important to maintain the readability of your source file. LaTeX may not care about the number of spaces or line length, but you, your coauthor, or your editor might.

Rule 3 contradicts Rules 1 and 2, consider it an exception. Sometimes—especially when defining commands and environments (see Sections 15.1 and 15.2)—it is more convenient to indicate the end of a paragraph with `\par`.

When e-mailing a source file, e-mail clients tend to break longer lines into shorter ones. Because of the space rules, this does not effect the typeset version most of the time.

5.2.2 Periods

LaTeX places a certain size space between words—the *interword space*—and a somewhat larger space between sentences—the *intersentence space.* To know which space to use, LaTeX must decide whether or not a period indicates the end of a sentence.

Rule 1 ■ Period

To LaTeX, a period after a capital letter, for instance, A. or caT., signifies an abbreviation or an initial. Generally, every other period signifies the end of a sentence.

This rule works most of the time. When it fails—for instance, twice with e.g.—you need to specify the type of space you want, using the following two rules.

Rule 2 ■ Period

If an abbreviation does not end with a capital letter, for instance, `etc.`, and it is not the last word in the sentence, then follow the period by an interword space (`\␣`) or a tie (`~`), if appropriate (see Section 5.4.3).

Recall that `\␣` provides an interword space.

```
The result was first published, in a first approximation,
in the Combin.\ Journal. The result was first published,
in a first approximation, in the Combin. Journal.
```

prints as

The result was first published, in a first approximation, in the Combin. Journal. The result was first published, in a first approximation, in the Combin. Journal.

Notice that Combin. in the first line is followed by a regular interword space. The intersentence space following Combin. in the second line is a little wider.

A tie (or nonbreakable space)—see also Section 5.4.3—is more appropriate than `\␣` in phrases such as Prof. Smith, typed as `Prof.~Smith`, and pp. 271–292, typed as `pp.~271--292`.

Tip The `thebibliography` environment handles periods properly. You do not have to mark periods for abbreviations (in the form `.\`) in the name of a journal, so

```
Acta Math. Acad. Sci. Hungar.
```

is correct.

Rule 3 ■ Period

If a capital letter is followed by a period and is at the end of a sentence, precede the period with `\@`.

For example,

```
(1) follows from condition~H\@. We can proceed\\
(1) follows from condition~H. We can proceed
```

prints:

(1) follows from condition H. We can proceed
(1) follows from condition H. We can proceed

Notice that there is not enough space after H. in the second line.

Most typographers agree on the following rule (see, e.g., Robert Bringhurst's *The Elements of Typographic Style* [8], p. 30):

Rule 4 ■ Period

Add no space or a thin space (`\,`) within strings of initials and be consistent.

So W.H. Lampstone with no space or W. H. Lampstone with thin space is preferred over W. H. Lampstone. My personal choice is W. H. Lampstone with thin space.

To make all intersentence spaces equal to the interword space—as required in French typography—you can use the command

```
\frenchspacing
```

To switch back to using spaces of different sizes, give the command

```
\nonfrenchspacing
```

5.3 Commanding LaTeX

How do you command LaTeX to do something special for you, such as starting a new line, changing emphasis, or displaying the next theorem? You use *commands* and special pairs of commands called *environments*, both briefly introduced at the start of Chapter 2.

Most, but not all, commands have *arguments,* which are usually fairly brief. Environments have *contents*, the text between the `\begin` and `\end` commands. The contents of an environment can be several paragraphs long.

5.3.1 Commands and environments

The `\emph{text}` *command* instructs LaTeX to emphasize its argument, *text*. The `\&` command has no argument. It instructs LaTeX to typeset & (see Section 5.4.4).

The `flushright` *environment* instructs LaTeX to right justify the content, the text between the two commands

```
\begin{flushright}
\end{flushright}
```

The content of the `document` environment is the body of the article (see Section 4.1) and the content of the `abstract` environment is the abstract.

Rule ■ Environments

An environment starts with the command

`\begin{`*name*`}`

and ends with

`\end{`*name*`}`

Between these two lines is the *content* of the environment, affected by the definition of the environment.

Rule ■ Commands

A LaTeX command starts with a backslash, \, and is followed by the *command name.* The *name* of a command is either a *single non-alphabetic character* other than a tab or end-of-line character or a *string of letters,* that is, one or more letters.

So # and ’ are valid command names. The corresponding commands `\#` and `\’` are used in Sections 5.4.4 and 5.4.7, respectively. `input` and `date` are also valid command names. However, `input3`, `in#ut`, and `in␣ut` are not valid names because 3, #, and ␣ should not occur in a multicharacter command name. Note that ␣ is a command name, the command `\␣` produces a blank.

LaTeX has a few commands, for instance, `$` (see Section 7.1) that do not follow this naming scheme, that is, they are not of the form `\`*name*. See also Section 15.1.8 for special commands with special termination rules.

Rule ■ Command termination

LaTeX finds the end of a command name as follows:

- If the first character of the name is not a letter, the name is the first character.
- If the first character of the name is a letter, the command name is terminated by the first nonletter.

If the command name is a string of letters, and is terminated by a space, then LaTeX discards all spaces following the command name.

While `input3` is an invalid name, `\input3` is not an incorrect command. It is the `\input` command followed by the character `3`, which is either part of the text following the command or the argument of the command.

LaTeX also allows some command names to be modified with `*`. Such commands are referred to as *`*`-ed commands*. Many commands have `*`-ed variants. `\hspace*` is an often-used `*`-ed command (see Section 5.8.1).

Rule ■ Command and environment names

Command and environment names are *case sensitive.* `\ShowLabels` is not the same as `\showlabels`.

Rule ■ Arguments

Arguments are enclosed in braces, `{}`.
Optional arguments are enclosed in brackets, `[]`.

Commands may have *arguments,* typed in braces immediately after the command. The argument(s) are used in processing the command. Accents provide very simple examples. For instance, `\'{o}`—which produces ó—consists of the command `\'` and the argument `o` (see Section 5.4.7). In `\bibliography{article1}`, the command is `\bibliography` and the argument is `article1` (see Section 16.2.2).

Sometimes, if the argument is a single character, the braces can be dropped: `\'o` also typesets as ó.

Some environments also have arguments. For example, the `alignat` environment (see Section 9.5.4) is delimited by the commands

```
\begin{alignat}{2}
```

and

```
\end{alignat}
```

The argument, 2, is the number of columns—it could be any number 1, 2, ... A command or environment may have more than one argument. The `\frac` command (see Section 7.4.1) has two, `$\frac{1}{2}$` typesets as $\frac{1}{2}$. The user-defined command `\con` has three (see Section 15.1.2).

Some commands and environments have one or more *optional arguments,* that is, arguments that may or may not be present. The `\sqrt` command (see Section 7.4.5) has an optional argument for specifying roots other than the square root. To get $\sqrt[3]{25}$, type `\sqrt[3]{25}`. The `\documentclass` command has an argument, the name of a document class, and an optional argument, a list of options (see Section 10.2), for instance,

```
\documentclass[12pt,draft,leqno]{amsart}
```

Tip If you get an error when using a command, check that:

1. The command is spelled correctly, including the use of uppercase and lowercase letters.
2. You have specified all required arguments in braces.
3. Any optional argument is in brackets, not braces or parentheses.
4. The command is properly terminated.
5. The package providing the command is loaded with the `\usepackage` command.

Most errors in the use of commands are caused by breaking the termination rule. We can illustrate some of these errors with the `\today` command, which produces today's date. You have already seen this command in Section 2.4 (see also Section 5.4.8). The correct usage is

```
\today\ is the day
```

or

```
\today{} is the day
```

which both typeset as

July 19, 2006 is the day

In the first case, `\today` was terminated by `\␣`, the command that produces an interword space. In the second case, it was terminated by the *empty group* `{}`.

If there is no space after the `\today` command, as in

```
\todayis␣the␣day
```

you get the error message

```
! Undefined control sequence.
l.3 \todayis
              the day
```

LaTeX thinks that `\todayis` is the command, and, of course, does not recognize it.

If you type one or more spaces after `\today`:

```
\today␣␣is␣the␣day
```

LaTeX interprets the two spaces as a single space by the first space rule (see page 64), and uses that one space to delimit `\today` from the text that follows it. So LaTeX produces

July 19, 2006is the day

Section 15.1.8 discusses how best to avoid such errors.

Tip If a command—or environment—can have an optional argument and

- none is given, and
- the text following the command starts with `[`,

then type this as `{[}`.

This may happen, for instance, with the command `\item` (see page 123). To get an example for an environment, see Section 9.6.1 for subsidiary math environments and page 229 for the alignment options. See what happens if no option is given but the math starts, say, with `[x]`.

5.3.2 Scope

A command issued inside a pair of braces `{ }` has no effect beyond the right brace, except for the seldom occurring *global* commands (see Section 5.3.3). You can have any number of pairs of braces:

```
{ ... { ... { ... } ... } ... }
```

The innermost pair containing a command is the *scope* of that command. The command has no effect outside its scope. We can illustrate this concept using the `\bfseries` command that switches the font to boldface:

```
{some text \bfseries bold text} no more bold
```

typesets as

some text **bold text** no more bold

The commands `\begin{`*name*`}` and `\end{`*name*`}` bracketing an environment act also as a pair of braces. In particular, `$`, `\[`, and `\]` are special braces.

Rule ■ Braces

1. Braces must be balanced: An opening brace has to be closed, and a closing brace must have a matching opening brace.

2. Pairs of braces cannot overlap.

Violating the first brace rule generates warnings and error messages. If there is one more opening brace than closing brace, the document typesets, but you get a warning:

```
(\end occurred inside a group at level 1)
```

For two or more unmatched opening braces, you are warned that `\end` occurred inside a group at level 2, and so on. There is a tendency to disregard such warnings since your article is already typeset and the error may be difficult to find. However, such errors may have strange consequences. At one point in the writing of my second LaTeX book, there were two extra opening braces in Chapter 2. As a result, the title of Chapter 7 was placed on a page by itself! So it is best not to disregard such warnings.

If you have one unmatched closing brace, you get an error message such as

```
! Too many }'s
```

If special braces, say, `\begin{name}` and `\end{name}`, do not balance, you get an error message such as those discussed in Section 4.3.1:

```
! LaTeX Error: \begin{name} on input line 21
ended by \end{document}.
```

or

```
! LaTeX Error: \begin{document} ended by \end{name}.
```

To illustrate the second rule, here are two simple examples of overlapping braces.

Example 1

```
{\bfseries some text
\begin{lemma}
```

```
   more text} final text
\end{lemma}
```

Example 2

```
{some \bfseries text, then math: $\sqrt{2} }, \sqrt{3}$
```

In Example 1, the scope of `\bfseries` overlaps the braces `\begin{lemma}` and `\end{lemma}`, whereas in Example 2, the scope of `\bfseries` overlaps the special braces $ and $. Example 1 is easy to correct:

```
{\bfseries some text}
\begin{lemma}
   {\bfseries more text}
    final text
\end{lemma}
```

Example 2 may be corrected as follows:

```
{some \bfseries text, then math:} $\sqrt{2}, \sqrt{3}$
```

Actually, $\sqrt{2}$ does not even have a bold version (see Section 8.3.3).

If the braces do overlap and they are of the same kind, LaTeX simply misunderstands the instructions. The closing brace of the first pair is regarded as the closing brace of the second pair, an error that may be difficult to detect. LaTeX can help if special braces overlap. Typesetting Example 1 gives the error message

```
! Extra }, or forgotten \endgroup.
l.7 more text }
                final text
```

5.3.3 *Types of commands*

It may be useful at this point to note that commands can be of various types.

Some commands have arguments, and some do not. Some commands effect change only in their arguments, while some commands declare a change. For instance, `\textbf{This is bold}` typesets the phrase `This is bold` in bold type: **This is bold** and has no effect on the text following the argument of the command. On the other hand, the command `\bfseries` declares that the text that follows should be bold. This command has no argument. I call a command that declares change a *command declaration.* So `\bfseries` is a command declaration, while `\textbf` is not. As a rule, command declarations are commands without arguments.

Commands with arguments are called *long* if their argument(s) can contain a blank line or a `\par` command; otherwise they are *short.* For example, `\textbf` is a short

command. So are all the top matter commands discussed in Section 11.2. The `\parbox` command, discussed in Section 5.9.4, is long.

Finally, as discussed in Section 5.3.2, the effect of a command remains within its scope. This is true only of *local* commands. There are also some *global* commands, such as the `\setcounter` command described in Section 15.5.1.

Fragile commands

As a rule, LaTeX reads a paragraph of the source file, typesets it, and then goes on to the next paragraph (see Section D.5). Some information from the source file, however, is separately stored for later use.

Examples include the title of an article, which is reused as a running head (Section 11.2.1); titles of parts, sections, subsections, and other sectioning commands, which are used in the table of contents (Sections 18.2 and 10.4.1); footnotes (Section 5.5.2); table and figure captions (Section 10.4.3), which are used in lists of tables and figures (Section 10.4.3); and index entries (Chapter 17).

These are *movable arguments,* and certain commands embedded in them must be protected from damage while being moved. LaTeX commands that need such protection are called *fragile.* The inline math delimiter commands (introduced on page 18) `\(` and `\)` are fragile, while `$` is not.

In a movable argument, fragile commands must be protected with a `\protect` command. Thus

```
The function \( f(x^{2}) \)
```

is not an appropriate section title, but

```
The function \protect \( f(x^{2}) \protect \)
```

is. So is

```
The function $f(x^{2})$
```

To be on the safe side, you should protect every command that might cause problems in a movable argument. Section 18.2 shows an example of what happens if a fragile command is not protected. Alternatively, use commands declared with

```
\DeclareRobustCommand
```

This command works the same way as `\newcommand` but the command defined is *robust*, that is, not fragile.

5.4 Symbols not on the keyboard

A typeset document may contain symbols that cannot be typed. Some of these symbols may even be available on the keyboard but you are prohibited from using them (see

Section 5.1.3). In this section, we discuss the commands that typeset some of these symbols in text.

5.4.1 Quotation marks

To produce single and double quotes, as in

‘subdirectly irreducible’ and “subdirectly irreducible”

type

```
‘subdirectly irreducible’ and ‘‘subdirectly irreducible’’
```

Here, ‘ is the left single quote and ’ is the right single quote. Note that the double quote is obtained by pressing the single quote key twice, and *not* by using the double quote key. If you need single and double quotes together, as in “She replied, ‘No.’”, separate them with `\,` (which provides a thin horizontal space):

```
‘‘She replied, ‘No.’\,’’
```

5.4.2 Dashes

Dashes come in three lengths. The shortest dash, called a *hyphen*, is used to connect words:

Mean-Value Theorem

This phrase is typed with a single dash:

```
Mean-Value Theorem
```

A medium-sized dash, called an *en dash*, is typed as `--` and is used

- For number ranges; for instance, the phrase see pages 23–45, is typed as

  ```
  see pages~23--45
  ```

  Note: `~` is a nonbreakable space or tie (see Section 5.4.3).

- In place of a hyphen in a compound adjective when one of the elements of the adjective is an open compound (such as New York) or hyphenated (such as non-English). For instance, the phrase Jonathan Schmidt–Freid adjoint, is typed as

  ```
  Jonathan Schmidt--Freid adjoint
  ```

A long dash—called an *em dash*—is used to mark a change in thought or to add emphasis to a parenthetical clause, as in this sentence. The two em dashes in the last sentence are typed as follows:

```
A long dash---called an \emph{em dash}---is used
```

In math mode, a single dash is typeset as the minus sign $-$ (a binary operation) with some spacing on both sides, as in $15 - 3$ or the "negative" as in -3 (see Sections 5.1.1 and 7.4.1).

Note that there is no space before or after an en dash or em dash.

5.4.3 Ties or nonbreakable spaces

A *tie* or *nonbreakable space* (sometimes called a *blue space*) is an interword space that cannot be broken across lines. For instance, when referencing P. Neukomm in an article, you do not want the initial P. at the end of a line and the surname Neukomm at the beginning of the next line. To prevent such an occurrence, you should type `P.~Neukomm`.

If your keyboard does not have `~`, use the `\nobreakspace` command instead, and type `P.\nobreakspace Neukomm`.

The following examples show some typical uses:

```
Theorem~\ref{T:main} in Section~\ref{S:intro}

Donald~E. Knuth

assume that $f(x)$ is (a)~continuous, (b)~bounded

the lattice~$L$.

Sections~\ref{S:modular} and~\ref{S:distributive}

In~$L$, we find
```

Of course, if you add too many ties, as in

```
Peter~G.~Neukomm% Incorrect!
```

LaTeX may send you a line too wide error message (see Section 5.7.1).

The tie (`~`) absorbs spaces, so typing `P.␣~␣Neukomm` works just as well. This feature is convenient when you add a tie during editing.

5.4.4 Special characters

The characters corresponding to nine of the 13 special keys (see Section 5.1.2) are produced by typing a backslash (\) and then the key, as shown in Table 5.1.

If for some reason you want to typeset a backslash in your document, type the command `\textbackslash`, which typesets as \. You might think that you could get a typewriter style backslash by utilizing the `\texttt` command introduced in Section 2.4

```
\texttt{\textbackslash}
```

but this is not the case, `\textbackslash` and `\texttt{\textbackslash}` produce the same symbol, \, which is different from the typewriter style backslash: `\`. Look at them side by side: \ \. For a typewriter style backslash you can use the `\bsl` command introduced in Section 15.1.1 or the `\texttt{\symbol{92}}` command introduced later in this section.

The | key is seldom used in text. If you need to typeset the math symbol | in text, type `\textbar`.

Note that in text, * typesets as *, whereas in a formula it typesets centered as ∗. To typeset a centered star in text, use the command `\textasteriskcentered`.

`@` typesets as @.

Finally, the " key should never be used in text. See Section 5.4.1 for the proper way to typeset double quotes. Nevertheless, sometimes " may be used to typeset ", as in the computer code segment `print("Hello!")`. In BibTeX and *MakeIndex*, " has special meanings (see Chapters 16 and 17).

Tip Be careful when typing `\{` and `\}` to typeset the braces { }. Typing a brace without its backslash results in unbalanced braces, in violation of the first brace rule in Section 5.3.2.

We illustrated in Section 5.3.2 some consequences of unbalanced braces. You may avoid some of these problems by introducing user-defined commands, as introduced in Section 15.3.

You can also produce special characters with the `\symbol` command:

`\symbol{94}` typesets as ^

`\symbol{126}` typesets as ~

Name	Type	Typeset
Ampersand	`\&`	&
Caret	`\^{}`	^
Dollar Sign	`\$`	$
Left Brace	`\{`	{
Right Brace	`\}`	}
Underscore (or Lowline)	`\_`	_
Octothorp	`\#`	#
Percent	`\%`	%
Tilde	`\~{}`	~

Table 5.1: Nine special characters.

	0	1	2	3	4	5	6	7	8	9
x	Γ	Δ	Θ	Λ	Ξ	Π	Σ	Υ	Φ	Ψ
1x	Ω	↑	↓	'	¡	¿	ı	ȷ	`	´
2x	˘	¯	˚	¸	ß	æ	œ	ø	Æ	
3x	Œ	Ø	␣	!	"	#	$	%	&	’
4x	(	)	*	+	,	-	.	/	0	1
5x	2	3	4	5	6	7	8	9	:	;
6x	<	=	>	?	@	A	B	C	D	E
7x	F	G	H	I	J	K	L	M	N	O
8x	P	Q	R	S	T	U	V	W	X	Y
9x	Z	[	\	]	^	_	‘	a	b	c
10x	d	e	f	g	h	i	j	k	l	m
11x	n	o	p	q	r	s	t	u	v	w
12x	x	y	z	{	|	}	~	¨		

Table 5.2: Font table for the Computer Modern typewriter style font.

`\texttt{\symbol{92}}` typesets as \

The argument of the `\symbol` command is a number matching the slot of the symbol in the layout (encoding) of the font. The layout for the Computer Modern typewriter style font is shown in Table 5.2.

Alternatively, instead of `\texttt{\symbol{92}}`, can use

```
\texttt{\char‘\\}
```

Any character `x` in the font can be accessed by typing the character itself as `‘\x`. This way you don’t have to look up the position of the symbol.

You can obtain similar tables for any font in your LaTeX implementation by using the `fonttbl.tex` file in your `samples` folder. The table format in this file is used in Section 6.6 as an example of the `tabular` environment.

For more about font tables, see the `nfssfont.tex` file, part of the standard LaTeX distribution (see Section 12.3) and see also Section 7.5.7 of *The LaTeX Companion,* 2nd edition [46].

5.4.5 Ellipses

The text ellipsis, …, is produced using the `\dots` command. Typing three periods produces ... (notice that the spacing is wrong).

`\dots` is one of several commands that can be used to create ellipses in formulas (see Section 7.4.3).

5.4.6 Ligatures

Certain groups of characters, when typeset, are joined together—such compound characters are called *ligatures*. There are five ligatures that LaTeX typesets automatically (if you use the Computer Modern fonts): ff, fi, fl, ffi, and ffl.

If you want to prevent LaTeX from forming a ligature, separate the characters with the command `\textcompwordmark`. Compare iff with iff, typed as `iff` and

```
if\textcompwordmark f
```

Enclosing the second character in braces (`{}`) is a crude method of preventing the ligature, as used in Formula 4 of the *Formula Gallery* (see Section 7.9). This method, in some instances, may interfere with LaTeX's hyphenation algorithm.

5.4.7 Accents and symbols in text

LaTeX provides 15 European accents. Type the command for the accent (\ and a character), followed by the letter (in braces) on which you want the accent placed (see Table 5.3).

For example, to get Grätzer György, type

```
Gr\"{a}tzer Gy\"{o}rgy
```

and to get Ö type `\"{O}`.

To place an accent on top of an i or a j, you must use the *dotless* version of i and j. These are obtained by the commands `\i` and `\j`: `\'{\i}` typesets as í and `\v{\j}` typesets as ǰ. Tables 5.4 and 5.5 list some additional text symbols and European characters available in LaTeX when typing text. Using localized versions of LaTeX, you get more accented and combined characters such as the Catalan geminated ell (see Appendix G).

Name	Type	Typeset	Name	Type	Typeset
acute	`\'{o}`	ó	macron	`\={o}`	ō
breve	`\u{o}`	ŏ	overdot	`\.{g}`	ġ
caron/haček	`\v{o}`	ǒ	ring	`\r{u}`	ů
cedilla	`\c{c}`	ç	tie	`\t{oo}`	o͡o
circumflex	`\^{o}`	ô	tilde	`\~{n}`	ñ
dieresis/umlaut	`\"{u}`	ü	underdot	`\d{m}`	ṃ
double acute	`\H{o}`	ő	underbar	`\b{o}`	o̲
grave	`\‘{o}`	ò			
dotless i	`\i`	ı	dotless j	`\j`	ȷ
	`\'{\i}`	í		`\v{\j}`	ǰ

Table 5.3: European accents.

Note that the `\textcircled` command (in Table 5.5) takes an argument. It seems to work best with a single lowercase character, like ⓐ or ⓠ. Capitals such as Ⓐ are not very satisfactory. Section 5.9.6 explains how to create the symbol Ⓐ.

5.4.8 Logos and dates

`\TeX` produces TEX, `\LaTeX` produces LATEX, and `\LaTeXe` produces LATEX 2ε (the original name of the current version of LATEX). The `\AmS` command produces the logo $\mathcal{A}_{\mathcal{M}}\mathcal{S}$.

Remember to type `\TeX\␣` or `\TeX{}` if you need a space after TEX (similarly for the others). A better way to handle this problem is discussed in Section 15.1.1.

LATEX also stores some useful numbers:

- `\time` is the time of day in minutes since midnight
- `\day` is the day of the month
- `\month` is the month of the year
- `\year` is the current year

You can include these numbers in your document by using the `\the` command:

```
Year: \the\year; month: \the\month; day: \the\day
```

produces a result such as

Year: 2006; month: 7; day: 11

Of more interest is the `\today` command, which produces today's date in the form: July 11, 2006. It is often used as the argument of the `\date` command (see Section 11.2.1).

Remember the termination rule (Rule 3 in Section 5.3.1).

```
today's date in the form: \today (you may want
```

produces

today's date in the form: July 11, 2006(you may want

To get the desired effect, type `\␣` or `{}` after the `\today` command:

```
today's date in the form: \today\ (you may want
```

Name	Type	Typeset	Type	Typeset
a-ring	`\aa`	å	`\AA`	Å
aesc	`\ae`	æ	`\AE`	Æ
ethel	`\oe`	œ	`\OE`	Œ
eszett	`\ss`	ß	`\SS`	SS
inverted question mark	`?‘`	¿		
inverted exclamation mark	`!‘`	¡		
slashed L	`\l`	ł	`\L`	Ł
slashed O	`\o`	ø	`\O`	Ø

Table 5.4: European characters.

Name	Type	Typeset
ampersand	`\&`	&
asterisk bullet	`\textasteriskcentered`	*
backslash	`\textbackslash`	\
bar (caesura)	`\textbar`	|
brace left	`\{`	{
brace right	`\}`	}
bullet	`\textbullet`	•
circled a	`\textcircled{a}`	ⓐ
circumflex	`\textasciicircum`	^
copyright	`\copyright`	©
dagger	`\dag`	†
double dagger (diesis)	`\ddag`	‡
dollar	`\$`	$
double quotation left	`\textquotedblleft` or ‘‘	“
double quotation right	`\textquotedblright` or ’’	”
em dash	`\textemdash` or `---`	—
en dash	`\textendash` or `--`	–
exclamation down	`\textexclamdown` or `!‘`	¡
greater than	`\textgreater`	>
less than	`\textless`	<
lowline	`\_`	_
midpoint	`\textperiodcentered`	·
octothorp	`\#`	#
percent	`\%`	%
pilcrow (paragraph)	`\P`	¶
question down	`\textquestiondown` or `?‘`	¿
registered trademark	`\textregistered`	®
section	`\S`	§

Table 5.5: Extra text symbols.

5.4.9 Hyphenation

LaTeX reads the source file one line at a time until it reaches the end of the current paragraph and then tries to balance the lines (see Section D.3.2). To achieve this goal, LaTeX hyphenates long words using a built-in hyphenation algorithm, a database stored in the `hyphen.tex` file, and a long `\hyphenation` list in the AMS document classes. If you use a document class not containing such a list, copy the hyphenation list from `amsart` to your document.

Rule ■ Optional hyphen

If you find that LaTeX cannot properly hyphenate a word, put *optional hyphens* in the word. An optional hyphen is typed as `\-`, and allows LaTeX to hyphenate the word where the optional hyphen is placed—and only at such points—if the need arises.

Examples: `data\-base,an\-ti\-thet\-ic`, `set\-up`

Note that:

- Optional hyphens prevent hyphenation at any other point in the word.
- Placing an optional hyphen in a particular occurrence of a word does not affect the hyphenation of any other occurrences of that word.

Rule ■ Hyphenation specifications

List the words that often need help in a command:

```
\hyphenation{set-up as-so-ciate}
```

All occurrences of the listed words following this command in your document are hyphenated as specified.

Note that in the `\hyphenation` command the hyphens are designated by `-` and not by `\-`, and that the words are separated by spaces not by commas.

You must use optional hyphens for words with accented characters, as in

```
Gr\"{a}t\-zer
```

Such words cannot be included in a `\hyphenation` list (unless you use the T1 font encoding—see Appendix G).

Rule ■ Preventing hyphenation

To *prevent* hyphenation of a word, put it in the argument of a `\text` command or place it unhyphenated in a `\hyphenation` command.

For example, type

```
\text{database}
```

if you do not want this instance of `database` hyphenated, or type

```
\hyphenation{database}
```

if you do not want LaTeX to hyphenate any occurrence of the word after this command in your document. Of course, typing `data\-base` overrides the general prohibition for this one instance.

You can have any number of `\hyphenation` commands in your document.

Tip LaTeX does not break a hyphenated word except at the hyphen, nor does it break a word followed by or preceding an em dash or en dash (see Section 5.4.2). LaTeX often needs help with such words.

Sometimes a hyphen in a phrase should not be broken. For instance, the phrase $\mathfrak{m}$-complete lattice should not be broken after $\mathfrak{m}$; so type it as

```
\text{$\mathfrak{m}$-com}\-plete lattice
```

(see Section 8.3.2 for `\mathfrak`).

Use the `\nobreakdash` command (placed before the hyphen)

```
\nobreakdash-  \nobreakdash--  \nobreakdash---
```

to prevent such breaks. For example,

```
pages~24\nobreakdash--47
```

Since LaTeX does not hyphenate a hyphenated word except at the hyphen,

```
\nobreakdash-
```

prevents the hyphenation of the whole word as though it were enclosed in a `\text` command. The form

```
\nobreakdash-\hspace{0pt}
```

allows the normal hyphenation of the word that follows the hyphen. For example,

```
$\mathfrak{m}$\nobreakdash-\hspace{0pt}complete lattice
```

allows the word `complete` to be hyphenated.

This coding of the phrase $\mathfrak{m}$-complete lattice is a natural candidate for a user-defined command (see Section 15.1.1).

Tip If you want to know how LaTeX would hyphenate a list of words, place it in the argument of a `\showhyphens` command.

For instance,

```
\showhyphens{summation reducible latticoid}
```

The result,

```
sum-ma-tion re-ducible lat-ti-coid
```

is shown in the `log` file.

Tip Some text editors wrap lines in a source file by breaking them at a hyphen, introducing errors in your typeset document.

For instance,

```
It follows from Theorem~\ref{T:M} that complete-
simple lattices are very large.
```

is typeset by LaTeX as follows:

It follows from Theorem 2 that complete- simple lattices are very large.

As you can see, there is a space between the hyphen and the word simple. The text editor inserted an end-of-line character after the hyphen (by the second space rule, see Section 5.2.1). This end-of-line character was interpreted by LaTeX as a space. To correct the error, make sure that there is no such line break, or comment out (see Section 5.5.1) the end-of-line character:

```
It follows from Theorem~\ref{T:M} that complete-%
simple lattices are very large.
```

Better yet, rearrange the two lines:

```
It follows from Theorem~\ref{T:M} that
complete-simple lattices are very large.
```

Of course, LaTeX does not know everything about the complicated hyphenation rules of the English language. Consult *The Chicago Manual of Style,* 15th edition [11] and Lyn Dupré's *BUGS in Writing: A Guide to Debugging Your Prose,* 2nd edition [13] for additional guidance.

5.5 Comments and footnotes

Various parts of your source file do not get typeset like most of the rest. The two primary examples are comments that do not get typeset at all and footnotes that get typeset at the bottom of the page.

5.5.1 Comments

The % symbol tells LaTeX to ignore the rest of the line. A common use might be a comment to yourself in the source file:

```
therefore, a reference to Theorem~1 % check this!
```

The % symbol has many uses. For instance, a document class command (see Section 11.5),

```
\documentclass[twocolumn,twoside,legalpaper]{amsart}
```

may be typed with explanations, as

```
\documentclass[%
twocolumn,%  option for two-column pages
twoside,%    format for two-sided printing
legalpaper%  print on legal-size paper
]{amsart}
```

so you can easily comment out some at a later time, as in

```
\documentclass[%
%twocolumn,%  option for two-column pages
%twoside,%    format for two-sided printing
legalpaper%  print on legal-size paper
]{amsart}
```

Notice that the first line is terminated with a % to comment out the end-of-line character.

Tip Some command arguments do not allow any spaces. If you want to break a line within an argument list, you can terminate the line with a %, as shown in the previous example.

See also the example at the end of Section 5.4.9.

It is often useful to start a document with a comment line giving the file name and identifying the earliest version of LaTeX that must be used to typeset it.

```
% This is article.tex
\NeedsTeXFormat{LaTeX2e}[1994/12/01]
```

The second line specifies the December 1, 1994 (or later) release of LaTeX. You may need to use such a declaration if your document uses a feature that was not available in earlier releases. Since LaTeX changes very little these days, this command is of limited use. (See, however, the discussion on page 311.)

Other uses of `%` include marking parts of the article for your own reference. For instance, you may include comments to explain command definitions (as in Section 15.3). If something goes wrong inside a multiline math display (see Chapter 9), LaTeX does not tell you precisely where the error is. You can try commenting out all but one of the lines, until each line works separately.

Note that `%` does not comment out lines in a BibTeX database document (see Section 16.2.4).

Tip **The 25% rule**

If you want a % sign in text, make sure you type it as `\%`. Otherwise, `%` comments out the rest of the line. LaTeX does not produce a warning.

Using `%` to comment out large blocks of text can be tedious even with block comment. The `verbatim` package includes the `comment` environment:

```
\begin{comment}
   ...the commented out text...
\end{comment}
```

Rule ■ `comment` **environments**

1. `\end{comment}` must be on a line by itself.

2. There can be no `comment` within a `comment`.

In other words,

```
\begin{comment}
   commented out text...
   \begin{comment}
      some more commented out text...
   \end{comment}
```

```
   and some more commented out text...
\end{comment}
```

is not allowed. LaTeX may give one of several error messages, depending on the circumstances. For instance,

```
! LaTeX Error: \begin{document} ended by \end{comment}.

l.175 \end{comment}
```

The `comment` environment can be very useful in locating errors. Suppose you have unbalanced braces in your source file (see Section 5.3.2). Working with a *copy* of your source file, comment out the first half at a safe point (not within an environment!) and typeset. If you still get the same error message, the error is in the second half. If there is no error message, the error is in the first half. Comment out the half that has no error.

Now comment out half of the remaining text and typeset again. Check to see whether the error appears in the first half of the remaining text or the second. Continue applying this method until you narrow down the error to a paragraph that you can inspect visually.

Since the `comment` environment requires the `verbatim` package, you must include the line

```
\usepackage{verbatim}
```

in the preamble of the source file (see Sections 12.3.1 and E.1).

5.5.2 Footnotes

The text of a footnote is typed as the argument of a `\footnote` command. To illustrate the use of footnotes, I have placed one here.[1] This footnote is typed as

```
\footnote{Footnotes are easy to place.}
```

If you want to use symbols to designate the footnotes, instead of numbers, type the command

```
\renewcommand{\thefootnote}
          {\ensuremath{\fnsymbol{footnote}}}
```

before the first footnote; this provides up to nine symbols. In Section 15.1.1, we discuss the `\ensuremath` command. Section 3.2 of *The LaTeX Companion,* 2nd edition [46] describes how to further customize footnotes.

In addition, there are title-page footnotes, such as the `\thanks` and `\date` commands in the top matter. See page 42 for a typeset example of `\date`. See also Section 11.2 and the typeset title page footnotes on page 286.

[1] Footnotes are easy to place.

You can add a footnote marked by * to the title of an article. For instance, type the title

```
\title[Complete congruence lattices]%
  {Complete congruence lattices$^*$}
```

and add the lines

```
{\renewcommand{\thefootnote}{\fnsymbol{footnote}}
\setcounter{footnote}{1}
\footnotetext{Lecture delivered at the \AMS
              annual meeting in Brandon.}
\setcounter{footnote}{0}
}
```

The footnote will appear as the first footnote on page 1 marked by *. All the other footnotes are unmarked.

5.6 Changing font characteristics

Although a document class and its options determine how LaTeX typesets characters, there are occasions when you want control over the shape or size of the font used.

5.6.1 Basic font characteristics

You do not have to be a typesetting expert to recognize the following basic font attributes:

Shape Normal text is typeset:

upright (or *roman*)	as this text
slanted	*as this text*
italic	*as this text*
small caps	AS THIS TEXT

Monospaced and proportional Typewriters used *monospaced* fonts, that is, fonts all of whose characters are of the same width. Most text editors display text using a monospaced font. LaTeX calls monospaced fonts *typewriter style.* In this book, such a font is used to represent user input and LaTeX's response, such as "`typewriter style text`". Whereas, normal text is typeset in a *proportional* font, such as "proportional text with ii and mm", in which i is narrow and m is wide:

```
mmmmmm
iiiiii
```
} monospaced

mmmmmm
iiiiii
} proportional

Serifs A *serif* is a small horizontal (sometimes vertical) stroke used to finish off a vertical stroke of a letter, as on the top and bottom of the letter M. LaTeX's standard serif font is Computer Modern roman, such as "serif text". Fonts without serifs are called *sans serif*, such as "sans serif text". Sans serif fonts are often used for titles or for special emphasis.

Series: weight and width The *series* is the combination of weight and width. A font's *weight* is the thickness of the strokes and the *width* is how wide the characters are.

Light, medium (or *normal*), and *bold* often describe weight.

Narrow (or *condensed*), *medium* (or *normal*), and *extended* often describe width.

The Computer Modern family includes **bold fonts**. Traditionally, when the user asks for bold CM fonts, LaTeX actually provides *bold extended* (a somewhat wider version).

Size Most LaTeX articles are typeset with 10 point text unless otherwise instructed. Larger sizes are used for titles, section titles, and so on. Abstracts and footnotes are often set in 8-point type.

Font family The collections of all sizes of a font is called a *font family*.

5.6.2 Document font families

In a document class, the style designer designates three document font families:

1. *Roman* (upright and serifed) document font family
2. *Sans serif* document font family
3. *Typewriter style* document font family

and picks one of these (for articles, as a rule, the roman document font family) as the *document font family* or *normal family.* In all the examples in this book, the document font family is the roman document font family except for presentations which use sans serif (see Section 4.4 and Chapter 14). When you use Computer Modern fonts in LaTeX, which is the default, the three document font families are Computer Modern roman, Computer Modern sans serif, and Computer Modern typewriter. The document font family is Computer Modern roman.

In this book, the roman document font family is Times, the sans serif document font family is Helvetica, and the typewriter style document font family is Computer Modern typewriter. The document font family is the roman document font family Times.

The document font family (normal family) is the default font. You can always switch back to it with

```
\textnormal{...} or {\normalfont ...}
```

Table 5.6 shows these two commands and three additional pairs of commands to help you switch among the three basic document font families. It also shows the command pairs for the basic font shapes.

Command with Argument	Command Declaration	Switches to the font family
`\textnormal{...}`	`{\normalfont ...}`	document
`\emph{...}`	`{\em ...}`	*emphasis*
`\textrm{...}`	`{\rmfamily ...}`	roman
`\textsf{...}`	`{\sffamily ...}`	sans serif
`\texttt{...}`	`{\ttfamily ...}`	`typewriter style`
`\textup{...}`	`{\upshape ...}`	upright shape
`\textit{...}`	`{\itshape ...}`	*italic shape*
`\textsl{...}`	`{\slshape ...}`	*slanted shape*
`\textsc{...}`	`{\scshape ...}`	SMALL CAPITALS
`\textbf{...}`	`{\bfseries ...}`	**bold**
`\textmd{...}`	`{\mdseries ...}`	normal weight and width

Table 5.6: Font family switching commands.

Command pairs

The font-changing commands of Table 5.6 come in two forms:

- A command with an argument, such as `\textrm{...}`, changes its argument. These are short commands, i.e., they cannot contain a blank line or a `\par` command.
- A command declaration, such as `\rmfamily`, carries out the font change following the command and within its scope (see Section 5.3.2).

You should always use commands with arguments for small changes within a paragraph. They have two advantages:

- You are less likely to forget to change back to the normal font.
- You do not have to worry about italic corrections (see Section 5.6.4).

Note that *MakeIndex* requires you to use commands with arguments to change the font in which page numbers are typeset (see Section 17.1).

For font changes involving more than one paragraph, use command declarations. These commands are preferred if you want to create user-defined commands and environments (see Chapter 15).

5.6.3 Shape commands

There are five pairs of commands to change the font shape:

- `\textup{...}` or `{\upshape ...}` switch to the upright shape.
- `\textit{...}` or `{\itshape ...}` switch to the *italic shape*.
- `\textsl{...}` or `{\slshape ...}` switch to the *slanted shape*.
- `\textsc{...}` or `{\scshape ...}` switch to SMALL CAPITALS.
- `\emph{...}` or `{\em ...}` switch to *emphasis*.

The document class specifies how emphasis is typeset. As a rule, it is italic or slanted unless the surrounding text is italic or slanted, in which case it is upright. For instance,

```
\emph{Rubin space}
```

in the statement of a theorem is typeset as

> *the space satisfies all three conditions, a so-called* Rubin space *that ...*

The emphasis changed the style of Rubin space from italic to upright.

Tip Be careful not to interchange the command pairs. For instance, if by mistake you type `{\textit serif}`, the result is *serif*. Only the *s* is italicized since `\textit` takes `s` as its argument.

Rule ■ **Abbreviations and acronyms**
For abbreviations and acronyms use small caps, except for two-letter geographical acronyms.

So Submitted to TUG should be typed as

```
Submitted to \textsc{tug}
```

Note that only the lowercase characters in the argument of the `\textsc` command are printed as small caps.

5.6.4 Italic corrections

The phrase

> when using a *serif* font

may be typed as follows:

```
when using a {\itshape serif\/} font
```

The `\/` command before the closing brace is called an *italic correction.* Notice that `{\itshape M}M` typesets as *M*M, where the *M* is leaning into the M. Type `{\itshape M\/}M` to get the correct spacing *M*M. Compare the typeset phrase from the previous example with and without an italic correction:

when using a *serif* font
when using a *serif* font

The latter is not as pleasing to the eye.

Rule 1 ■ Italic correction

If the emphasized text is followed by a period or comma, you should not type the italic correction.

For example,

Do not forget. My party is on Monday.

should be typed as

```
{\itshape Do not forget.} My party is on Monday.
```

Rule 2 ■ Italic correction

The shape commands with arguments do not require italic correction. The corrections are provided automatically where needed.

Thus you can type the phrase when using a *serif* font the easy way:

```
when using a \textit{serif} font
```

Whenever possible, let LaTeX take care of the italic correction. However, if LaTeX is adding an italic correction where you feel it is not needed, you can override the correction with the `\nocorr` command. LaTeX does not add an italic correction before a period or a comma. These two punctuation marks are stored in the `\nocorrlist` command. By redefining this command, you can modify LaTeX's behavior.

Rule 3 ■ Italic correction

The italic correction is required with the commands `\itshape`, `\slshape`, `\em`.

Command	Sample text
`\Tiny`	sample text
`\tiny`	sample text
`\SMALL` or `\scriptsize`	sample text
`\Small` or `\footnotesize`	sample text
`\small`	sample text
`\normalsize`	sample text
`\large`	sample text
`\Large`	sample text
`\LARGE`	sample text
`\huge`	sample text
`\Huge`	sample text

Table 5.7: Font size commands.

5.6.5 Series

These attributes play a very limited role with the Computer Modern fonts. There is only one important pair of commands,

```
\textbf{...}   {\bfseries ...}
```

to change the font to bold (actually, bold extended). The commands

```
\textmd{...}   {\mdseries ...}
```

which set both the weight and width to medium (normal) are seldom needed.

5.6.6 Size changes

Standard LaTeX documents are typeset in 10 point type. The 11 point and 12 point type are often used for greater readability and some journals require 12 point—if this is the case, use the `12pt` document class option (see Sections 11.5, 12.1.2, and 18.1.3). The sizes of titles, subscripts, and superscripts are automatically set by the document class, in accordance with the font size option.

If you must change the font size for some text—it is seldom necessary to do so in an article—the following command declarations are provided (see Table 5.7):

```
\Tiny  \tiny  \SMALL  \Small  \small
                \normalsize
\large  \Large  \LARGE  \huge  \Huge
```

The command \SMALL is also called \scriptsize and the command \Small is also called \footnotesize. The font size commands are listed in order of increasing—to be more precise, nondecreasing—size.

Two commands allow the user to increase or decrease font size: \larger moves up one size, \smaller moves down one. Both commands take an optional argument. For example, \larger[2] moves up 2 sizes.

5.6.7 Orthogonality

You are now familiar with the commands that change the font family, shape, series, and size. Each of these commands affects one and only one font attribute. For example, if you change the series, then the font family, shape, and size do not change. These commands act independently. In LaTeX terminology, the commands are *orthogonal.* From the user's point of view this behavior has an important consequence: *The order in which these commands are given does not matter.* Thus

```
\Large \itshape \bfseries
```

has the same effect as

```
\bfseries \itshape \Large
```

Note that LaTeX 2.09's two-letter commands (see Section 5.6.8) are not orthogonal.

Orthogonality also means that you can combine these font attributes in any way you like. For instance, the commands

```
\sffamily \slshape \bfseries \Large
```

instruct LaTeX to change the font family to sans serif, the shape to slanted, the series to bold, and the size to \Large. If the corresponding font is not available, LaTeX uses a font that is available, and issues a warning. The font substitution algorithm (see Section 7.9.3 of *The LaTeX Companion,* 2nd edition [46] for details) may not provide the font you really want, so it is your responsibility to make sure that the necessary fonts are available. We discuss this topic further in Section 18.5.

5.6.8 Obsolete two-letter commands

Users of LaTeX 2.09 and $\mathcal{A}\mathcal{M}\mathcal{S}$-LaTeX version 1.1 are accustomed to using the two-letter commands \bf, \it, \rm, \sc, \sf, \sl, and \tt. These commands are not part of LaTeX. They are, however, still defined in most document classes. The two-letter commands

1. switch to the document font family,

2. change to the requested shape.

There are a number of reasons not to use them. The two-letter commands

- are not part of LaTeX,
- require manual italic corrections,
- are not orthogonal (see Section 5.6.7).
  `\slshape \bfseries` is the same as `\bfseries \slshape` (slanted bold), but `\sl\bf` is not the same as `\bf\sl`. Indeed, `{\sl\bf sample}` gives **sample** and `{\bf\sl sample}` produces *sample*.

5.6.9 Low-level commands

The font-characteristic changing commands we discussed in this section are the *high-level* font commands. Each of these commands is implemented by LaTeX and the document class using *low-level* font commands. The low-level commands have been developed for document class and package writers. See Section 7.9 of *The LaTeX Companion,* 2nd edition [46].

There is one use of low-level commands you should keep in mind. When you choose a font size for your document or for some part thereof, you also determine the `\baselineskip`, the distance from the baseline of one line to the baseline of the next. Typically, a 10-point font size uses a 12 point `\baselineskip`. Occasionally, you may want to change the font size along with the `\baselineskip`. A command for accomplishing this is

```
\fontsize{9pt}{11pt}\selectfont
```

which changes the font size to 9 point and the `\baselineskip` to 11 point. To make this change for a single paragraph, you can type

```
{%special paragraph
\fontsize{9pt}{11pt}\selectfont

text

}%end special paragraph
```

Observe the blank line that follows `text` and marks the end of the paragraph; `\par` would accomplish the same thing.

5.7 Lines, paragraphs, and pages

When typesetting a document, LaTeX breaks the text into lines, paragraphs, and pages. Sometimes you may not like how LaTeX has chosen to lay out your text. There are ways to influence how LaTeX does its work and these are discussed in this section.

5.7.1 Lines

LaTeX typesets a document one paragraph at a time. It tries to split the paragraph into lines of equal width. If it fails to do so successfully and a line is too wide, you get an `overfull \hbox` message. Here is a typical example:

```
Overfull \hbox (15.38948pt too wide) in paragraph
             at lines 11--16
[]\OT1/cmr/m/n/10 In sev-eral sec-tions of the course
             on ma-trix
the-ory, the strange term ‘‘hamiltonian-
```

The `log` file records these error messages. To place a visual warning in the typeset version of your document as well, use the `draft` document class option

```
\documentclass[draft]{amsart}
```

Lines that are too wide are be marked with a *slug* (a black box) in the margin. A slug is a vertical bar of width `\overfullrule`.

Do not worry about such messages while writing the document. If you are preparing the final version and receive a message for an `overfull \hbox`, the first line of defense is to see whether optional hyphens would help (see Section 5.4.9). Read the warning message carefully to see which words LaTeX cannot hyphenate properly. If adding optional hyphens does not help, a simple rephrasing of the problem sentence often does the trick.

Recall that there are 72.27 points in an inch (see Section 2.3). So if the error message indicates a 1.55812 pt overflow, for instance, you can safely ignore it.

Tip If you do not want the 1.55812pt overflow reported whenever the document is typeset, you can enclose the offending paragraph (including the blank line indicating the end of the paragraph) between the lines

```
{\setlength{\hfuzz}{2pt}
```

and

```
}% end of \hfuzz=2pt
```

Choose an argument that is slightly more than the reported error (maybe `2pt`). This does not affect the typeset output, but the warning message and the slug, if you are using the `draft` option, are suppressed.

Alternatively, enclose the offending paragraph including the blank line indicating the end of the paragraph in a `setlength` environment:

```
\begin{setlength}{\hfuzz}{2pt}
\end{setlength}
```

Breaking lines

There are two forms of the line breaking command:

- The \\ and \newline commands break the line at the point of insertion but do not stretch it.
- The \linebreak command breaks the line at the point of insertion and stretches the line to make it of the normal width.

The text following any of these commands starts at the beginning of the next line, without indentation. The \\ command is often used, but \linebreak is rarely seen. (See Section 18.6 for an application of the \linebreak command.) I illustrate the effect of these commands:

```
There are two forms of the line breaking command:

There are two forms\\ of the line breaking command:

There are two forms \newline of the line breaking
                                          command:

There are two forms \linebreak of the line breaking
                                            command:
```

typeset as

There are two forms of the line breaking command:
There are two forms
of the line breaking command:
There are two forms
of the line breaking command:
There are two forms
of the line breaking command:

If you force a line break in the middle of a paragraph with the \linebreak command and LaTeX thinks that there is too little text left on the line to stretch it to full width, you get a message such as

```
Underfull \hbox (badness 4328) in paragraph
                                        at lines 8--12
```

The \\ command has two important variants:

- \\[*length*], where *length* is the interline space you wish to specify after the line break, for instance, 12pt, .5in, or 1.2cm. Note how the units are abbreviated.
- *, which prohibits a page break following the line break.

The *[*length*] form combines the two variants. We illustrate the \\[*length*] command:

```
It is also semimodular.\\[15pt]  In particular,
```

which is typeset as

It is also semimodular.

In particular,

Since \\ can be modified by * or by [ ], LaTeX may get confused if the line after a \\ command starts with a * or [. In such cases, type * as {*} or [as {[}. For instance, to get

There are two sources of problems:
[a] The next line starts with [.

type

```
There are two sources of problems:\\
{[}a] The next line starts with \texttt{[}.
```

If you fail to type {[}, you get the error message

```
! Missing number, treated as zero.
<to be read again>
                   a
l.16 [a]
         The next line starts with \texttt{[}.
```

Rule ■ \\

Without optional arguments, the \\ command and the \newline command are the same *in text,* but not within environments or command arguments.

You can qualify the `\linebreak` command with an optional argument: `0` to `4`. The higher the argument, the more it forces the occurrence of a line break. The `\linebreak[4]` command is the same as `\linebreak`, while `\linebreak[0]` allows the line break but does not force it.

The `\nolinebreak` command plays the opposite role. `\nolinebreak[0]` = `\linebreak[0]`, and `\nolinebreak[4]` = `\nolinebreak`. `\nolinebreak` is seldom used since the tie (`~`) and the `\text` command (see Section 5.4.3) accomplish the same goal most of the time.

Double spacing

It is convenient to proofread documents double spaced. Moreover, some journals require submissions to be double spaced.

To typeset a document double spaced, include the command

```
\renewcommand{\baselinestretch}{1.5}
```

in its preamble. Alternatively, get George D. Greenwade's `setspace` (see Section E.1 on how to get it). Load this package with a

```
\usepackage{setspace}
```

command in the preamble of the document and specify

```
\doublespacing
```

in the preamble. This changes not just the line spacing but a number of other parameters to make your article look good.

See also Section 3.1.13 of *The LaTeX Companion,* 2nd edition [46].

5.7.2 Paragraphs

Paragraphs are separated by blank lines or by the `\par` command. Error messages always show paragraph breaks as `\par`. The `\par` form is also very useful in user-defined commands and environments (see Sections 15.1 and 15.2).

In some document classes, the first line of a paragraph is automatically indented. Indentation can be prevented with the `\noindent` command and can be forced with the `\indent` command.

Sometimes—for instance, in a schedule, glossary, or index—you may want a *hanging indent,* where the first line of a paragraph is not indented, and all the others are indented by a specified amount.

Hanging indents are created by specifying the amount of indentation specified by `\hangindent` and set with the `\setlength` command:

```
\setlength{\hangindent}{30pt}
\noindent
```

```
\textbf{sentence} a group of words terminated by
 a period, exclamation point, or question mark.

\setlength{\hangindent}{30pt}
\noindent
\textbf{paragraph} a group of sentences terminated by a
blank line or by the new paragraph command.
```

produces

sentence a group of words terminated by a period, exclamation point, or question mark.

paragraph a group of sentences terminated by a blank line or by the new paragraph command.

Notice that the `\setlength` command must be repeated for each paragraph.

Sometimes you may want to change the value of `\hangafter`, the length command that specifies the number of lines not to be indented. The default value is 1. To change it to 2, use the command

```
\setlength{\hangafter}{2}
```

For more about the `\setlength` command, see Section 15.5.2. *The LaTeX Companion,* 2nd edition [46] discusses in Section 3.1.4 the style parameters of a paragraph.

The preferred way to shape a paragraph or series of paragraphs is with a custom list environment (see Section 15.6).

5.7.3 Pages

There are two page breaking commands:

- `\newpage`, which breaks the page at the point of insertion but does not stretch the content
- `\pagebreak`, which breaks the page at the point of insertion and stretches the page's content to normal length

Text following either command starts at the beginning of the next page, indented.

As you can see, the page breaking commands are analogous to the line breaking commands discussed in Section 5.7.1. This analogy continues with the optional argument, `0` to `4`:

`\pagebreak[0]` to `\pagebreak[4]`
`\nopagebreak[0]` to `\nopagebreak[4]`

There are also special commands for allowing or forbidding page breaks in multiline math displays (see Section 9.9).

When preparing the final version of a document (see Section 18.5), you may have to extend or shrink a page by a line or two to prevent it from breaking at an unsuitable line. You can do so with the `\enlargethispage` command. For instance,

```
\enlargethispage{\baselineskip}
```

adds one line to the page length. On the other hand,

```
\enlargethispage{-\baselineskip}
```

makes the page one line shorter.

```
\enlargethispage{10000pt}
```

makes the page very long.

The `*`-ed version, `\enlargethispage*`, squeezes the page as much as possible.

There are two more variants of the `\newpage` command. The

```
\clearpage
```

command does a `\newpage` and typesets all the figures and tables waiting to be processed (see Section 10.4.3). The variant

```
\cleardoublepage
```

is used with the `twoside` document class option (see Sections 11.5 and 12.1.2). It does a `\clearpage` and in addition makes the next printed page a right-hand, that is, odd-numbered, page, by inserting a blank page if necessary. If for your document class this does not work, use the package `cleardoublepage.sty` in the `samples` folder.

Section 18.6 discusses the use of some of these commands in the final preparation of books.

5.7.4 Multicolumn printing

Many document classes provide the `twocolumn` option for two-column typesetting (see Sections 11.5 and 12.1.2). In addition, there is a `\twocolumn` command which starts a new page by issuing a `\clearpage` and then typesets in two columns. An optional argument provides a two-column wide title. Use the `\onecolumn` command to switch back to a one-column format.

Frank Mittelbach's `multicol` package (see Section 12.3.1) provides the much more sophisticated `multicols` environment, which can start in the middle of a page, can handle more than two columns, and can be customized in a number of ways (see Section 3.5.3 of *The LaTeX Companion,* 2nd edition [46]).

5.8 Spaces

The judicious use of horizontal and vertical space is an important part of the formatting of a document. Fortunately, most of the spacing decisions are made by the document class, but LaTeX has a large number of commands that allow the user to insert horizontal and vertical spacing.

Remember that LaTeX ignores excess spaces, tabs, and end-of-line characters. If you need to add horizontal or vertical space, then you must choose from the commands in this section. Use them sparingly.

5.8.1 Horizontal spaces

In this section, we discuss fixed length horizontal space commands. Variable length horizontal space is discussed in Section 5.8.4.

When typing text, there are three commands that are often used to create horizontal space, shown between the bars in the display below:

```
\␣      ␣
\quad   ␣␣
\qquad  ␣␣␣␣
```

The `\quad` command creates a 1 em space and `\qquad` creates a 2 em space (see Section 5.8.3). The interword space created by `\␣` can both stretch and shrink. There are other commands that create smaller amounts of space. All the math spacing commands of Section 8.1.3—with the exception of `\mspace`—can be used in ordinary text (see Sections B.9 and C.6), but the `\hspace` and `\phantom` commands are more appropriate.

The `\hspace` command takes a length as a parameter. The length may be negative. For example,

```
\textbar\hspace{12pt}\textbar   |  |
\textbar\hspace{.5in}\textbar   |      |
\textbar\hspace{1.5cm}\textbar  |        |
```

or `\hspace{-40pt}`. The command `\hspace` is often used with a negative argument when placing illustrations.

The `\phantom{`*argument*`}` command produces a space the width and height of the space that would be occupied by its typeset argument

```
\textbar need space\textbar            |need space|
\textbar\phantom{need space}\textbar   |          |
```

and

```
alpha \phantom{beta} gamma \phantom{delta}\\
\phantom{alpha} beta \phantom{gamma} delta
```

produces

alpha gamma
beta delta

The \phantom command is very useful for fine tuning aligned math formulas (see Sections 8.1 and 9.5.3). The variant

\hphantom{*argument*}

creates a space with the horizontal dimension that would be occupied by its typeset *argument* and with zero height.

For instance, the last two lines of the dedication of this book were typed as follows:

```
\textbf{Emma} (2), \phantom{and \textbf{Kate} (0)}\\[8pt]
                              and \textbf{Kate} (0)
```

See Section C.6 for a table of all horizontal text-spacing commands.

Horizontal space variant

When LaTeX typesets a line, it removes all spaces from the beginning of the line, including the space created by \hspace, \quad, and other spacing commands. Using the *-ed variant of \hspace, \hspace*, prevents LaTeX from removing the space you have specified.

For example,

```
And text\\
\hspace{20pt}And text\\
\hspace*{20pt}And text
```

is typeset as

And text
And text
And text

Use the \hspace* command for creating customized indentation. To indent a paragraph by 24 points, give the command

```
\noindent\hspace*{24pt}And text
```

which typesets as

And text

To break a line and indent the next line by 24 points, give the command

```
And text\\
\hspace*{24pt}And text
```

which produces

And text
And text

5.8.2 *Vertical spaces*

You can add some interline space with the command `\\[`*`length`*`]`, as discussed in Section 5.7.1. You can also do it with the `\vspace` command, which works just like the `\hspace` command (see Section 5.8.1), except that it creates vertical space. Here are some examples:

```
\vspace{12pt}  \vspace{.5in}  \vspace{1.5cm}.
```

Standard amounts of vertical space are provided by the three commands

```
\smallskip  \medskip  \bigskip
```

The space these commands create depends on the document class and the font size. With the document class and font I am using for this book, they represent a vertical space of 3 points, 6 points, and 12 points, respectively. 12 points is the baseline skip (see Section 5.6.9) in standard LaTeX documents with the default `10pt` option.

Rule ■ **Vertical space commands**
All vertical space commands add the vertical space *after* the typeset line in which the command appears.

To obtain



end of text.

New paragraph after vertical space

type

```
end of text.

\vspace{12pt}

New paragraph after vertical space
```

The following example illustrates the unexpected way the vertical space is placed if the command that creates it does not start a new paragraph:

```
end of text.
\vspace{12pt}
The following example illustrates the unexpected way
the vertical space is placed if the
command that creates it does not start a new paragraph:
```

It typesets as

end of text. The following example illustrates the unexpected way the vertical

space is placed if the command that creates it does not start a new paragraph:

Vertical space variants

LaTeX removes vertical space from the beginning and end of each page, including space produced by `\vspace`. The space created by the variant `\vspace*` is not removed by LaTeX under any circumstances. Use this command, for instance, to start the typeset text (say, of a letter) not at the top of the page.

The `\phantom` command has also a vertical variant: `\vphantom`. The command `\vphantom{`*`argument`*`}` creates a vertical space with the vertical dimension that would be occupied by its typeset argument, *`argument`*.

5.8.3 Relative spaces

The length of a space is usually given in *absolute units:* `12pt` (points), `.5cm` (centimeters), `1.5in` (inches). Sometimes, *relative units*, em and ex, are more appropriate, units that are relative to the size of the letters in the current font. The unit 1 em is approximately the width of an M in the current font, 1 ex is approximately the height of an x in the current font. These units are used in commands such as

`\hspace{12em}` and `\vspace{12ex}`

The `\quad` and `\qquad` commands (Section 5.8.1) produce 1 em and 2 em spaces.

5.8.4 Expanding spaces

Horizontal spaces

The `\hfill`, `\dotfill`, and `\hrulefill` commands fill all available space in the line with spaces, dots, or a horizontal line, respectively. If there are two of these commands on the same line, the space is divided equally between them. These commands can be used to center text, to fill lines with dots in a table of contents, and so on.

To obtain

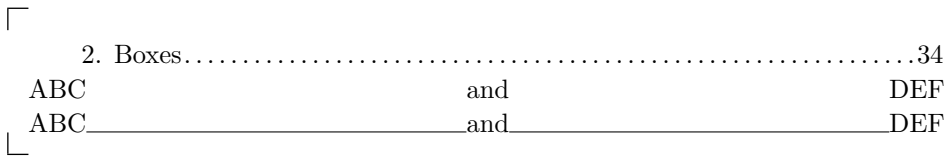

type

```
2. Boxes\dotfill 34\\
ABC\hfill and\hfill DEF\\
ABC\hrulefill and\hrulefill DEF
```

In a centered environment—such as a `\title` (see Section 11.2.1) or a `center` environment (see Section 6.3)—you can use `\hfill` to set a line flush right:

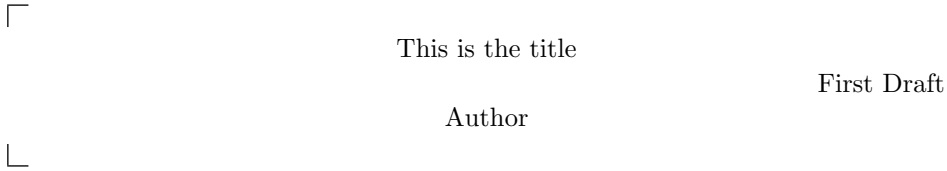

To achieve this effect, type

```
\begin{center}
  This is the title\\
  \hfill First Draft\\
  Author
\end{center}
```

Vertical spaces

The vertical analogue of `\hfill` is `\vfill`. This command fills the page with vertical space so that the text before the command and the text after the command stretch to the upper and lower margin. You can play the same games with it as with `\hfill` in Section 5.8.4.

The command `\vfill` stands for `\vspace{\fill}`, so it is ignored at the beginning of a page. Use `\vspace*{\fill}` if you need it at the beginning of a page.

5.9 Boxes

Sometimes it can be useful to typeset text in an imaginary box, and treat that box as a single large character. A single-line box can be created with the `\text` or `\makebox` commands and a multiline box of a prescribed width can be created with the `\parbox` command or `minipage` environment.

5.9.1 Line boxes

The `\text` command provides a *line box* that typesets its argument without line breaks. As a result, you may find the argument extending into the margin. The resulting box is handled by LaTeX as if it were a single large character. For instance,

```
\text{database}
```

causes LaTeX to treat the eight characters of the word `database` as if they were one. This technique has a number of uses. It prevents LaTeX from braking the argument (see Section 5.4.9). It also allows you to use the phrase in the argument in a formula (see Section 7.4.6).

The argument of `\text` is typeset in a size appropriate for its use, for example, as a subscript or superscript. See Section 7.4.6 for an example.

Line boxes—a refinement

The `\mbox` command is the short form of the `\makebox` command. Both `\mbox` and `\text` prevent breaking the argument, but `\mbox` does not change size in subscripts and superscripts.

The full form of the `\makebox` command is

```
\makebox[width][alignment]{text}
```

where the arguments are

- *`width`*, the (optional) width of the box. If `[`*`width`*`]` is omitted, the box is as wide as necessary to enclose its contents.
- *`alignment`*, (optionally) one of `c` (the default), `l`, `r`, or `s`. The text is centered by default, `l` sets the argument flush left, `r` right, and `s` stretches the text the full length of the box if there is blank space in the argument.
- *`text`*, the text in the box.

A *`width`* argument can be specified in inches (in), centimeters (cm), points (pt), or relative units such as em or ex (see Sections 5.8.3 and 15.5.2).

The following examples,

```
\makebox{Short title.}End\\
\makebox[2in][l]{Short title.}End\\
\makebox[2in]{Short title.}End\\
\makebox[2in][r]{Short title.}End\\
\makebox[2in][s]{Short title.}End
```

typeset as

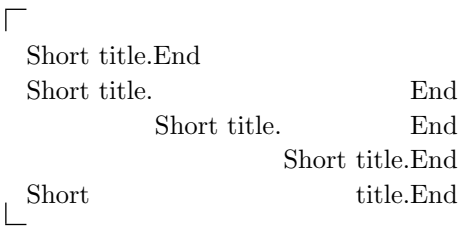

The optional width argument, *width*, can use four length commands:

`\height` `\depth` `\totalheight` and `\width`

These are the dimensions of the box that would be produced without the optional width argument.

Here is a simple example. The command

```
\makebox{hello}
```

makes a box of width `\width`. To typeset `hello` in a box three times the width, that is, in a box of width 3`\width`, use the command

```
\makebox[3\width]{hello}
```

So

```
start\makebox[3\width]{hello}end
```

typesets as



The formal definition of these four length commands is the following:

- `\height` is the height of the box above the baseline
- `\depth` is the depth of the box below the baseline
- `\totalheight` is the sum of `\height` and `\depth`
- `\width` is the width of the box

There is an interesting variant of the `\makebox` command. The `\rlap` command makes a box and pretends that it is of width zero. For instance,

```
\newcommand{\circwithdot}
   {\mathbin{\rlap{$\mspace{2mu}\cdot$}\hbox{$\circ$}}}
```

defines the command `\circwithdot`, so you can type

```
$f\circwithdot\varphi$
```

which prints as $f \circ \varphi$. There is also an `\llap` command.

5.9.2 Frame boxes

Boxed text is very emphatic. For example, Do not touch! is typed as

```
\fbox{Do not touch!}
```

This is a *frame box,* hence the command `\fbox` or `\framebox`.

Boxed text cannot be broken, so if you want a frame around more than one line of text, you should put the text as the argument of a `\parbox` command or within a `minipage` environment (see Section 5.9.3), and then put that into the argument of an `\fbox` command. For instance,

```
\fbox{\parbox{3in}{Boxed text cannot be broken,
so if you want to frame more than one line
of text, place it in the argument of a
\bsl\texttt{parbox}
command or within a
\texttt{minipage} environment.}}
```

produces

Boxed text cannot be broken, so if you want to frame more than one line of text, place it in the argument of a `\parbox` command or within a `minipage` environment.

The `\bsl` command is defined in Section 15.1.1. See Section 8.6.2 for boxed formulas.

The `\framebox` command works exactly like `\makebox`, except that it draws a frame around the box.

```
\framebox[2in][l]{Short title}
```

produces



You can use this command to typeset the number 1 in a square box, as required by the title of Michael Doob's *TEX Starting from* 1 [12]:

```
\framebox{\makebox[\totalheight]{1}}
```

which typesets as

Note that

```
\framebox[\totalheight]{1}
```

typesets as

which is not a square box. Indeed, `\totalheight` is the height of 1, which becomes the width of the box. The total height of the box, however, is the height of the character 1 to which you have to add twice the `\fboxsep`, the separation between the contents of the box and the frame, defined as 3 points, and twice the `\fboxrule`, the width of the line, or rule, defined as 0.4 points. These lengths are in general also added to the width of the box, but not in this case, because we forced the width to equal the height of the character.

You can use the `\fbox` command to frame the name of an author:

```
\author{\fbox{author's name}}
```

5.9.3 Paragraph boxes

A paragraph box works like a paragraph. The text it contains is wrapped around into lines. The width of these lines is set by the user.

The `\parbox` command typesets the contents of its second argument as a paragraph with a line width supplied as the first argument. The resulting box is handled by LaTeX as a single large character. For example, to create a 3-inch wide column,



type

```
\parbox{3in}{Fred Wehrung's new result shows the
limitation of E.\,T. Schmidt's construction,
especially for large lattices.}
```

Paragraph boxes are especially useful when working within a `tabular` environment. See the subsection on refinements in Section 6.6 for examples of multiline entries.

The width of the paragraph box can be specified in inches (in), centimeters (cm), points (pt), or the relative measurements em and ex (see Section 5.8.3), among others (see Section 15.5.2 for a complete listing of measurement units).

Tip The `\parbox` command requires two arguments. Dropping the first argument results in an error message such as

```
! Missing number, treated as zero.
<to be read again>
                   T
l.175
```

Dropping the second argument does not yield an error message but the result is probably not what you intended. The next character is taken as the contents of the `\parbox`.

Paragraph box refinements

The "character" created by a `\parbox` command is placed on the line so that its vertical center is aligned with the center of the line. An optional first argument `b` or `t` forces the paragraph box to align along its bottom or top. For an example, see Section 6.6. The full syntax of `\parbox` is

`\parbox[`*alignment*`][`*height*`][`*inner-alignment*`]{`*width*`}{`*text*`}`

Just as for the `\makebox` command (see Section 5.9.1), the

`\height` `\depth` `\totalheight` and `\width`

commands may be used in the *height* argument instead of a numeric argument.

The *inner-alignment* argument is the vertical equivalent of the *alignment* argument for `\makebox`, determining the position of *text* within the box and it may be any one of `t`, `b`, `c`, or `s`, denoting top, bottom, centered, or stretched alignment, respectively. When the *inner-alignment* argument is not specified, it defaults to *alignment*.

Paragraph box as an environment

The `minipage` environment is very similar to the `\parbox` command. It typesets the text in its body using a line width supplied as an argument. It has an optional argument for bottom or top alignment, and the other `\parbox` refinements also apply. The difference is that the `minipage` environment can contain displayed text environments discussed in Chapter 6.

The `minipage` environment can also contain footnotes (see Section 5.5.2) that are displayed within the minipage. See Section 3.2.1 of *The LaTeX Companion,* 2nd edition [46] for complications that may arise therefrom.

5.9.4 Marginal comments

A variant of the paragraph box, the `\marginpar` command, allows you to add marginal comments. So

```
\marginpar{Do not use this much.}
```

Do not use this much.

produces the comment displayed in the margin.

The AMS warning in the book [30] (also displayed here below the marginal comment) is defined as

Ⓐ

```
\marginpar{{\Large%
\textcircled{\raisebox{.7pt}{\normalsize\textbf A}}}}
```

The `\textcircled` command is discussed in Section 5.4.7, while the `\raisebox` command is introduced in Section 5.9.6.

Rule ■ Marginal comments and math environments
Do not use marginal comments in equations or multiline math environments.

Tip Avoid using too many marginal comments on any given page—LaTeX may have to place some of them on the next page.

If the document is typeset two-sided, then the marginal comments are set in the outside margin. The form

```
\marginpar[left-comment]{right-comment}
```

uses the required argument *right-comment* when the marginal comment is set in the right margin and the optional argument *left-comment* when the marginal comment is set in the left margin.

The width of the paragraph box for marginal comments is stored in the length command \marginparwidth (see Section 15.5.2 for length commands). If you want to change it, use

```
\setlength{\marginparwidth}{new_width}
```

as in

```
\setlength{\marginparwidth}{90pt}
```

The default value of this width is set by the document class. If you want to know the present setting, type

```
\the\marginparwidth
```

in your document and typeset it, or, in interactive mode (see Sections 15.1.7 and D.4), type

```
*\showthe\marginparwidth
```

(* is the interactive prompt).

See Sections 3.2.8 and 4.1 of *The LaTeX Companion,* 2nd edition [46] for other style parameters pertaining to marginal notes.

5.9.5 Solid boxes

A solid filled box is created with a \rule command. The first argument is the width and the second is the height. For instance, to obtain

end of proof symbol: ■

type

```
end of proof symbol: \rule{1.6ex}{1.6ex}
```

In fact, this symbol is usually slightly lowered:

end of proof symbol: ■

This positioning is done with an optional first argument:

```
end of proof symbol: \rule[-.23ex]{1.6ex}{1.6ex}
```

Here is an example combining \rule with \makebox and \hrulefill:

```
1 inch:\quad\makebox[1in]{\rule{.4pt}{4pt}%
   \hrulefill\rule{.4pt}{4pt}}
```

which produces

1 inch:

Struts

Solid boxes of zero width are called *struts.* Struts are invisible, but they force LaTeX to make room for them, changing the vertical alignment of lines. Standard struts can also be added with the `\strut` or `\mathstrut` command. To see how struts work, compare



typed as

```
\fbox{ab} and \fbox{\strut ab}  and \fbox{$\mathstrut$ab}
```

Struts are especially useful for fine tuning tables (see Section 6.6, page 139) and formulas (see math struts in Section 8.4).

Rule ■ **Zero distance**
`0pt, 0in, 0cm, 0em` all stand for zero width. `0` by itself is not acceptable.

For example, `\rule{0}{1.6ex}` gives the error message

```
! Illegal unit of measure (pt inserted).
<to be read again>
                   h
l.251 \rule{0}{1.6ex}
```

If the `\rule` command has no argument or only one, LaTeX generates an error message. For instance, `\rule{1.6ex}` gives the message

```
! Paragraph ended before \@rule was complete.
```

or

```
! Missing number, treated as zero.
```

In the first error message, the reference to `\@rule` suggests that the problem is with the `\rule` command. Checking the syntax of the `\rule` command, you find that an argument is missing. The second error message is more informative, since there is, indeed, a missing number.

5.9.6 Fine tuning boxes

The command

\raisebox{*displacement*}{*text*}

typesets *text* in a box with a vertical *displacement*. If *displacement* is positive, the box is raised; if it is negative, the box is lowered.

The \raisebox command allows us to play games:

```
fine-\raisebox{.5ex}{tun}\raisebox{-.5ex}{ing}
```

produces fine-$^{\text{tun}}_{\text{ing}}$.

The \raisebox command has two optional arguments:

\raisebox{0ex}[1.5ex][0.75ex]{*text*}

forces LaTeX to typeset *text* as if it extended 1.5 ex above and 0.75 ex below the line, resulting in a change in the interline space above and below the line. A simple version of this command, \smash, is discussed in Section 8.4.

In the AMS warning in the book [30] (shown on page 112), the \raisebox command is used to properly center the bold A in the circle:

```
\Large\textcircled{\raisebox{.7pt}{\normalsize\textbf A}}
```

CHAPTER

6

Text environments

There are three types of text environments in LaTeX:

1. Displayed text environments; text within such an environment usually is typeset with some vertical space around it
2. Text environments that create a "large symbol"
3. Style and size environments

We start by discussing a very important rule about blank lines in displayed text environments. Then we proceed in Section 6.2 to the most often used displayed text environments: lists. We continue with the style and size environments in Section 6.3.

The most important displayed text environments in math are proclamations or theorem-like structures, proclamations with style, and the `proof` environment, discussed in detail in Sections 6.4 and 6.5.

The `tabular` environment discussed in Section 6.6 produces a "large symbol", a table, which is of limited use in math.

In Section 6.7, we discuss the `tabbing` environment, which is often used for computer code. The legacy environments `quote`, `quotation`, and `verse` are discussed in Section 6.8, along with the `verbatim` environment, which is often used to display LaTeX source in a typeset LaTeX document.

6.1 Some general rules for displayed text environments

As you know, blank lines play a special role in LaTeX, usually indicating a paragraph break. Since displayed text environments structure the printed display themselves, the rules about blank lines are relaxed somewhat. However, a blank line trailing an environment signifies a new paragraph for the text following the environment.

Rule ■ Blank lines in displayed text environments

1. Blank lines are ignored immediately after `\begin{`*name*`}` or immediately before `\end{`*name*`}` except in a `verbatim` environment.
2. A blank line after `\end{`*name*`}` forces the text that follows to start a new paragraph.
3. As a rule, you should not have a blank line before `\begin{`*name*`}`.
4. The line after any theorem or proof always begins a new paragraph, even if there is no blank line or `\par` command.

The page breaking commands in Section 5.7.3 apply to text environments, as does the line breaking command `\\` discussed in Section 5.7.1.

6.2 List environments

LaTeX provides three list environments: `enumerate`, `itemize`, and `description`. LaTeX also provides a generic `list` environment that can be customized to fit your needs. See Section 15.6 on custom lists.

Most document classes redefine the spacing and some stylistic details of lists, especially since the list environments in the legacy document classes are not very pleasing. In this section, the list environments are formatted as they are by our standard document class, `amsart`. Throughout the rest of the book, lists are formatted as specified by this book's designer.

6.2.1 Numbered lists

A *numbered list* is created with the `enumerate` environment:

This space has the following properties:

(1) Grade 2 Cantor;
(2) Half-smooth Hausdorff;
(3) Metrizably smooth.

Therefore, we can apply the Main Theorem.

typed as

```
\noindent This space has the following properties:
\begin{enumerate}
   \item Grade 2 Cantor\label{Cantor};
   \item Half-smooth Hausdorff\label{Hausdorff};
   \item Metrizably smooth\label{smooth}.
\end{enumerate}
Therefore, we can apply the Main Theorem.
```

Each item is introduced with an `\item` command. The numbers LaTeX generates can be labeled and cross-referenced (see Section 10.4.2). This construct can be used in theorems and definitions, for listing conditions or conclusions.

If you use `\item` in the form `\item[]`, you get an unnumbered item in the list.

6.2.2 Bulleted lists

A *bulleted list* is created with the `itemize` environment:

We set out to accomplish a variety of goals:

- To introduce the concept of smooth functions.
- To show their usefulness in differentiation.
- To point out the efficacy of using smooth functions in Calculus.

is typed as

```
\noindent We set out to accomplish a variety of goals:
\begin{itemize}
   \item To introduce the concept of smooth functions.
   \item To show their usefulness in differentiation.
   \item To point out the efficacy of using smooth
      functions in Calculus.
\end{itemize}
```

6.2.3 Captioned lists

In a *captioned list* each item has a title (caption) specified by the optional argument of the `\item` command. Such lists are created with the `description` environment:

In this introduction, we describe the basic techniques:

Chopped lattice: a reduced form of a lattice;
Boolean triples: a powerful lattice construction;
Cubic extension: a subdirect power flattening the congruences.

is typed as

```
\noindent In this introduction, we describe
   the basic techniques:
\begin{description}
  \item[Chopped lattice] a reduced form of a lattice;
  \item[Boolean triples] a powerful lattice construction;
  \item[Cubic extensions] a subdirect power flattening
       the congruences.
\end{description}
```

6.2.4 A rule and combinations

There is only one rule you must remember.

Rule ■ List environments
An `\item` command must immediately follow
`\begin{enumerate}`, `\begin{itemize}`, or `\begin{description}`.

Of course, spaces and line breaks can separate them.

If you break this rule, you get an error message. For instance,

```
\begin{description}
This is wrong!
  \item[Chopped lattice] a reduced lattice;
```

gives the error message

```
! LaTeX Error: Something's wrong--perhaps a missing \item.

l.105   \item[Chopped lattice]
                                  a reduced lattice;
```

If you see this error message, remember the rule for list environments and check for text preceding the first `\item`.

You can nest up to four list environments; for instance,

(1) First item of Level 1.
    (a) First item of Level 2.
        (i) First item of Level 3.
            (A) First item of Level 4.
            (B) Second item of Level 4.
        (ii) Second item of Level 3.
    (b) Second item of Level 2.
(2) Second item of Level 1.

Referencing the second item of Level 4: 1(a)iB

which is typed as

```
\begin{enumerate}
   \item First item of Level 1.
   \begin{enumerate}
      \item First item of Level 2.
      \begin{enumerate}
         \item First item of Level 3.
         \begin{enumerate}
            \item First item of Level 4.
            \item Second item of Level 4.\label{level4}
          \end{enumerate}
          \item Second item of Level 3.
       \end{enumerate}
       \item Second item of Level 2.
   \end{enumerate}
   \item Second item of Level 1.
\end{enumerate}
Referencing the second item of Level 4: \ref{level4}
```

Note that the label `level4` collected all four of the counters (see Section 10.4.2).

You can also mix list environments:

(1) First item of Level 1.
- First item of Level 2.
  (a) First item of Level 3.
  - First item of Level 4.
  - Second item of Level 4.

  (b) Second item of Level 3.
- Second item of Level 2.

(2) Second item of Level 1.

Referencing the second item of Level 4: 1a

which is typed as

```
\begin{enumerate}
   \item First item of Level 1.
   \begin{itemize}
      \item First item of Level 2.
      \begin{enumerate}
         \item First item of Level 3.
         \begin{itemize}
            \item First item of Level 4.
            \item Second item of Level 4.\label{enums}
          \end{itemize}
          \item Second item of Level 3.
       \end{enumerate}
       \item Second item of Level 2.
   \end{itemize}
   \item Second item of Level 1.
\end{enumerate}
Referencing the second item of Level 4: \ref{enums}
```

Now the label `enums` collects only the two enumerate counters (see Section 10.4.2).

The indentations are, of course, not needed. I use them to keep track of the level of nesting.

In all three types of list environment, the `\item` command may be followed by an optional argument, which is displayed at the beginning of the typeset item:

`\item[`*label*`]`

Note that for `enumerate` and `itemize` the resulting typography may leave something to be desired.

Tip If the text following an `\item` command starts with an opening square bracket, `[`, then LaTeX thinks that `\item` has an optional argument. To prevent this problem from occurring, type `[` as `{[}`. Similarly, a closing square bracket, `]`, *inside* the optional argument should be typed as `{]}`.

Tip You may want to use a list environment solely for the way the items are displayed, without any labels. You can achieve this effect by using `\item[]`.

You can change the style of the numbers in an `enumerate` environment by redefining the counter as suggested in Section 15.5.1:

```
\renewcommand{\labelenumi}{{\normalfont (\roman{enumi})}}
```

The labels then are displayed as (i), (ii), and so on. This modification only works if you do not want to reference these items. If you want the `\ref` command to work properly, use David Carlisle's `enumerate` package (see Section 12.3.1). For an example of how to use Carlisle's environment, see Section 15.2.1.

Section 3.3 of *The LaTeX Companion,* 2nd edition [46] explains how to customize the three list environments and discusses Bernd Schandl's `paralist` package, which provides a number of new list environments and makes customizing the three legacy list environments much easier. For custom lists, see Section 15.6.

6.3 Style and size environments

There are several text environments that allow you to set font characteristics. They have the same names as their corresponding command declarations:

```
rmfamily  sffamily  ttfamily
upshape  itshape  em  slshape  scshape
bfseries
```

For instance,

```
\begin{ttfamily}
   text
\end{ttfamily}
```

typesets *text* just like `{\ttfamily` *text*`}` would. Remember to use the command-declaration names for the environment names, that is, use `rmfamily`, not `textrm` and `ttfamily`, not `texttt` (see Section 5.6.2). There are also text environments for changing the font size, from `tiny` to `Huge` (see Section 5.6.6).

If you are getting overwhelmed by the large number of environments changing style and size, consult Tables 5.6 and 5.7 (see also Section C.3.2).

Horizontal alignment of a paragraph is controlled by the `flushleft`, `flushright`, and `center` environments. Within the `flushright` and `center` environments, it is customary to force new lines with the `\\` command, while in the `flushleft` environment, you normally allow LaTeX to wrap the lines.

These text environments can be used separately or in combination, as in

The **simplest** text environments set the printing style and size.
The commands and the environments have similar names.

typed as

```
\begin{flushright}
   The \begin{bfseries}simplest\end{bfseries}
   text environments set the
   printing style and size.\\
   The commands and the environments have similar names.
\end{flushright}
```

There are command declarations that correspond to these environments:

- `\centering` centers text
- `\raggedright` left aligns text
- `\raggedleft` right aligns text

The effect of one of these commands is almost the same as that of the corresponding environment except that the environment places additional vertical space before and after the displayed paragraphs. For such a command declaration to affect the way a paragraph is formatted, the scope must include the whole paragraph, including the blank line at the end of the paragraph, preferably indicated with a `\par` command.

The `\centering` command is used often with the `\includegraphics` command (see Section 10.4.3).

6.4 Proclamations (theorem-like structures)

Theorems, lemmas, definitions, and so forth are a major part of mathematical writing. In LaTeX, these constructs are typed in displayed text environments called *proclamations* or *theorem-like structures*.

In the `intrart.tex` sample article (see pp. 42–43), there are two theorems, a definition, and a notation. These four environments have similar structures, only their names are different.

In the `sampart.tex` sample article (see pp. 286–288), there are a number of different proclamations in a variety of styles, with varying degrees of emphasis. Proclamations with style are discussed in Section 6.4.2.

We discuss in Section 4.2.3 the two steps required by proclamations:

Step 1 *Define* the proclamation with a `\newtheorem` command *in the preamble* of the document. For instance, the line

```
\newtheorem{theorem}{Theorem}
```

defines a `theorem` environment.

Step 2 *Invoke* the proclamation as an environment *in the body* of your document. Using the proclamation definition from Step 1, type

```
\begin{theorem}
   My first theorem.
\end{theorem}
```

to produce a theorem:

Theorem 1. *My first theorem.*

In the proclamation definition

```
\newtheorem{theorem}{Theorem}
```

the first argument, `theorem`, is the name of the environment that invokes the theorem. The second argument, `Theorem`, is the name that is used when the proclamation is typeset. LaTeX numbers the theorems automatically and typesets them with vertical space above and below. The phrase **Theorem 1.** appears, followed by the theorem itself, which may be emphasized. Of course, the formatting of the theorem depends on the document class and on the proclamation style (see Section 6.4.2).

You may also specify an optional argument,

```
\begin{theorem}[The Fuchs-Schmidt Theorem]
   The statement of the theorem.
\end{theorem}
```

that appears as the name of the theorem:

Theorem 1 (The Fuchs-Schmidt Theorem). *The statement of the theorem.*

LaTeX is very fussy about how proclamations are defined. For example, in the introductory article `intrart.tex` (see Section 4.1), if the closing brace is dropped from the end of line 8,

```
\newtheorem{definition}{Definition
```

you get an error message such as

```
Runaway argument?
{Definition \newtheorem {notation}{Notation}
! Paragraph ended before \@ynthm was complete.
<to be read again>
                   \par
l.10
```

Line 10 is the line after the `\newtheorem` commands. The message conveys the information that something is wrong in the paragraph before line 10.

If you forget an argument, as in

```
\newtheorem{definition}
```

LaTeX produces an error message such as

```
! LaTeX Error: Missing \begin{document}.

l.9 \newtheorem{n
                  otation}{Notation}
```

In the error message, the line

```
! LaTeX Error: Missing \begin{document}.
```

usually means that LaTeX became confused and believes that some text typed in the preamble should be moved past the line

```
\begin{document}
```

The mistake could be anywhere in the preamble above the line LaTeX indicates. If you encounter such an error message, try to isolate the problem by commenting out parts of the preamble (see Section 5.5.1 and also Section 4.3.1).

Rule ■ Lists in proclamations

If a proclamation starts with a list environment, precede the list by `\hfill`.

If you do not, as in

```
\begin{definition}\label{D:prime}
   \begin{enumerate}
   \item $u$ is \emph{bold} if $u = x^2$.\label{mi1}
   \item $u$ is \emph{thin} if $u = \sqrt{x}$.\label{mi2}
   \end{enumerate}
\end{definition}
```

your typeset list starts on the first line of the proclamation:

Definition 1. (1) *u is* bold *if* $u = x^2$.
(2) *u is* thin *if* $u = \sqrt{x}$.

If you add the `\hfill` command,

```
\begin{definition}\hfill
\begin{enumerate}
```

the list in the definition typesets correctly:

Definition 1.
(1) *u is* bold *if* $u = x^2$.
(2) *u is* thin *if* $u = \sqrt{x}$.

Consecutive numbering

If you want to number two sets of proclamations consecutively, you can do so by first defining one proclamation, and then using its name as an optional argument of the second proclamation. For example, to number the lemmas and propositions in your paper consecutively, you type the following two lines in your preamble:

```
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}[lemma]{Proposition}
```

Lemmas and propositions are then consecutively numbered as **Lemma 1**, **Proposition 2**, **Proposition 3**, and so on.

Let me emphasize: The optional argument of a proclamation definition must be the name of a proclamation that *has already been defined.*

Numbering within a section

The `\newtheorem` command may also have a different optional argument; it causes LaTeX to number the lemmas within sections. For example,

```
\newtheorem{lemma}{Lemma}[section]
```

numbers the lemmas in Section 1 as **Lemma 1.1** and **Lemma 1.2**. In Section 2, you have **Lemma 2.1** and **Lemma 2.2**, and so on.

Instead of `section`, you may use any sectioning command provided by the document class, such as `chapter`, `section`, and `subsection`.

Consecutive numbering and numbering within a section can be combined. For example,

```
\newtheorem{lemma}{Lemma}[section]
\newtheorem{proposition}[lemma]{Proposition}
```

sets up the `lemma` and `proposition` environments so that they are numbered consecutively within sections: **Lemma 1.1**, **Proposition 1.2**, **Proposition 1.3** and **Proposition 2.1**, **Lemma 2.2**, and so on.

6.4.1 The full syntax

The full form of `\newtheorem` is

`\newtheorem{`*envname*`}[`*procCounter*`]{`*Name*`}[`*secCounter*`]`

where the two optional arguments are mutually exclusive, and

envname is the name of the environment to be used in the body of the document. For instance, you may use `theorem` for the *envname* of a theorem, so that a theorem is typed inside a `theorem` environment. Of course, *envname* is just a label; you are free to choose any environment name, such as `thm` or `george` (as long as the name is not in use as the name of another command or environment). This argument is also the name of the counter LaTeX uses to number these text environments.

procCounter is an optional argument. It sets the new proclamation to use the counter of a previously defined proclamation and the two proclamations are consecutively numbered.

Name is the text that is typeset when the proclamation is invoked. So if `Theorem` is given as *Name*, then you get **Theorem 1**, **Theorem 2**, and so on in your document.

secCounter is an optional argument that causes *Name* environments to be numbered within the appropriate sectioning units. So if `theorem` is the *envname* and `section` is the *secCounter*, then in Section 1 you have **Theorem 1.1**, **Theorem 1.2**, and so on. In Section 2 you get **Theorem 2.1**, **Theorem 2.2**, and so on. Proclamations may be numbered within subsections, sections, chapters, or any other sectioning unit automatically numbered by LaTeX.

6.4.2 Proclamations with style

You can choose one of three styles for your proclamations by preceding the definitions with the `\theoremstyle{style}` command, where *`style`* is one of the following:

- `plain`, the most emphatic
- `definition`
- `remark`, the least emphatic

There are a few extra options, including the `\newtheorem*` command, an unnumbered version of `\newtheorem`.

The following commands set the styles in the `sampart.tex` article (see page 290). The typeset sample article (on pages 286–288) shows how the chosen styles affect the typeset proclamations.

```
\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}
\newtheorem*{main}{Main Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}

\theoremstyle{definition}
\newtheorem{definition}{Definition}

\theoremstyle{remark}
\newtheorem*{notation}{Notation}
```

A proclamation created by a `\newtheorem` command has the style of the last `\theoremstyle` command preceding it. The default style is `plain`.

Three examples

Here are three sets of proclamation definitions to illustrate different styles and numbering schemes.

Example 1

```
\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{lemma}[theorem]{Lemma}
\newtheorem{definition}[theorem]{Definition}
\newtheorem{corollary}[theorem]{Corollary}
```

In a document with this set of proclamation definitions you can use theorems, lemmas, definitions, and corollaries, typeset in the most emphatic (`plain`) style. They are all numbered consecutively: **Definition 1**, **Definition 2**, **Theorem 3**, **Corollary 4**, **Lemma 5**, **Lemma 6**, **Theorem 7**, and so on.

Example 2

```
\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem*{main}{Main Theorem}
\newtheorem{definition}{Definition}[section]
\newtheorem{lemma}[definition]{Lemma}

\theoremstyle{definition}
\newtheorem*{Rule}{Rule}
```

In this document you may use theorems, definitions, and lemmas in the most emphatic (`plain`) style, and unnumbered rules in the less emphatic (`definition`) style. Definitions and lemmas are numbered consecutively within sections. You may also use the unnumbered Main Theorem. So, for example, you may have **Definition 1.1**, **Definition 1.2**, **Main Theorem**, **Rule**, **Lemma 1.3**, **Lemma 2.1**, **Theorem 1**, and so on.

Example 3

```
\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}
\newtheorem*{main}{Main Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}

\theoremstyle{definition}
\newtheorem{definition}{Definition}

\theoremstyle{remark}
\newtheorem*{notation}{Notation}
```

With these proclamation definitions you can use theorems, corollaries, lemmas, and propositions in the most emphatic (`plain`) style, and an unnumbered Main Theorem. You can have definitions in the less emphatic (`definition`) style. All are separately numbered. So in the document you may have **Definition 1**, **Definition 2**, **Main Theorem**, **Lemma 1**, **Proposition 1**, **Lemma 2**, **Theorem 1**, **Corollary 1**, and so on. You can also have Notations which are unnumbered and typeset in the least emphatic (`remark`) style.

Number swapping

Proclamations can be numbered on the left, as for instance, **3.2 Theorem**. To accomplish this, type the `\swapnumbers` command before the `\newtheorem` command corresponding to the proclamation definition you want to change. This command affects all of the proclamation definitions that follow it, so the proclamation definitions in the preamble should be in two groups. The regular ones should be listed first, followed by the `\swapnumbers` command, then all the proclamations that swap numbers.

Do not swap numbers unless the publisher demands it.

Custom theorem styles

You can define custom theorem styles with the `\newtheoremstyle` command. You should very seldom do this, the three theorem styles of the document class should suffice. For more detail, see [5].

6.5 Proof environments

A proof is the contents of a `proof` environment. For instance,

Proof. This is a proof, delimited by the q.e.d. symbol. □

typed as

```
\begin{proof}
This is a proof, delimited by the q.e.d.\ symbol.
\end{proof}
```

A proof is set off from the surrounding text with some vertical space. The end of the proof is marked with the symbol □ at the end of the line. There are a few examples of the `proof` environment in the `sampart.tex` sample article (pages 286–293).

We start with the same rule for proofs as we have for proclamations on page 126.

Rule ■ Lists in proofs
If a proof starts with a list environment, precede the list by `\hfill`.

If you want to suppress the symbol at the end of a proof, give the command

```
\begin{proof}
   ...
   \renewcommand{\qedsymbol}{}
\end{proof}
```

To suppress the end of the proof symbol in the whole article, give the

```
\renewcommand{\qedsymbol}{}
```

command in the preamble.

To substitute another phrase for *Proof,* such as *Necessity,* as in

Necessity. This is the proof of necessity. □

use the `proof` environment with an optional argument:

```
\begin{proof}[Necessity]
This is the proof of necessity.
\end{proof}
```

The optional argument may contain a reference, as in

```
\begin{proof}[Proof of Theorem~\ref{T:smooth}]
```

which might be typeset as

Proof of Theorem 5. This is the proof. □

It is easy to make the mistake of placing the optional argument after `\begin`:

```
\begin[Proof of Theorem~\ref{T:P*}]{proof}
```

You get an error message

```
! LaTeX Error: Bad math environment delimiter.

l.91 \begin{equation}
                      \label{E:cong2}
```

which is not very helpful.

There is a problem with the placement of the q.e.d. symbol if the proof ends with a displayed formula (or a list environment). For instance,

```
\begin{proof}
Now the proof follows from the equation
\[
   a^2 = b^2 + c^2.
\]
\end{proof}
```

typesets as

Proof. Now the proof follows from the equation

$$a^2 = b^2 + c^2.$$

□

To correct the placement of the q.e.d. symbol, use the `\qedhere` command:

```
\begin{proof}
Now the proof follows from the equation
\[
   a^2 = b^2 + c^2.\qedhere
\]
\end{proof}
```

which typesets as

Proof. Now the proof follows from the equation

$$a^2 = b^2 + c^2.$$ □

6.6 Tabular environments

A `tabular` environment creates a table that LaTeX treats as a "large symbol". In particular, a table cannot be broken across pages.

Here is a simple table,

Name	1	2	3
Peter	2.45	34.12	1.00
John	0.00	12.89	3.71
David	2.00	1.85	0.71

, typeset inline. This looks awful, but it does make the point that the table is just a "large symbol". The table is typed as

```
\begin{tabular}{ | l | r | r | r | }
   \hline
   Name     & 1     & 2     & 3   \\ \hline
   Peter    &  2.45 & 34.12 & 1.00\\ \hline
   John     &  0.00 & 12.89 & 3.71\\ \hline
   David    &  2.00 & 1.85  & 0.71\\ \hline
\end{tabular}
```

with no blank line before or after the environment.

This table can be horizontally centered with a `center` environment (see Section 6.3). It can also be placed within a `table` environment (see Section 10.4.3). This sets the table off from the surrounding text with vertical space and you can also use the float controls `b`, `t`, `h`, `p` to specify where the table should appear (see Section 10.4.3). This also allows you to define a caption, which can be placed before or after the table:

```
\begin{table}
   \begin{center}
     \begin{tabular}{ | l | r | r | r | }
       \hline
       Name     & 1     & 2     & 3   \\ \hline
       Peter    &  2.45 & 34.12 & 1.00\\ \hline
       John     &  0.00 & 12.89 & 3.71\\ \hline
       David    &  2.00 & 1.85  & 0.71\\ \hline
     \end{tabular}
     \caption{Tabular table.}\label{Ta:first}
   \end{center}
\end{table}
```

This table is displayed as Table 6.1.

Name	1	2	3
Peter	2.45	34.12	1.00
John	0.00	12.89	3.71
David	2.00	1.85	0.71

Table 6.1: Tabular table.

It can be listed in a list of tables (see Section 10.4.3) and the table number may be referenced using the command `\ref{Ta:first}`. Note that the label must be typed *between* the caption and the `\end{table}` command.

For another example, look at the two tables in the `fonttbl.tex` file in your `samples` folder. The first is typed as

```
\begin{tabular}{r|l|l|l|l|l|l|l|l|l|l}
 & 0 & 1 & 2 & 3 & 4 & 5 & 6 & 7 & 8 & 9\\ \hline

0& \symbol{0} &\symbol{1}&\symbol{2}&\symbol{3}&
\symbol{4}&\symbol{5}&\symbol{6}&\symbol{7}&
\symbol{8}&\symbol{9}\\ \hline
```

. . .

```
120& \symbol{120} &\symbol{121}&\symbol{123}&
\symbol{123}&\symbol{124}&\symbol{125}&\symbol{126}
&\symbol{127} && \\ \hline
\end{tabular}
```

The second table is the same except that the numbers run from 128 to 255. The typeset table is shown in Section 5.4.4.

Rule ■ `tabular` environments

1. `\begin{tabular}` requires an argument consisting of a character `l`, `r`, or `c`, meaning left, right, or center alignment, for each column, and optionally, the `|` symbols. Each `|` indicates a vertical line in the typeset table. Spaces in the argument are ignored but can be used for readability.
2. Columns are separated by ampersands (`&`) and rows are separated by `\\`.
3. `&` absorbs spaces on either side.
4. The `\hline` command creates a horizontal rule in the typeset table. It is placed either at the beginning of the table (after the `\begin` line) or it must follow a `\\` command.
5. If you use a horizontal line to finish the table, you must separate the last row of the table from the `\hline` command with the `\\` command.
6. `\begin{tabular}` takes an optional argument, `b` or `t`, to specify the bottom or the top vertical alignment of the table with the baseline. The default is center alignment.

Remember to put the optional argument `b` or `t` in square brackets, as in

```
\begin{tabular}[b]{ | l | r | r | r | }
```

If you forget to place an `\hline` command right after `\\` in the last row, you get an error message such as

```
! Misplaced \noalign.
\hline ->\noalign
                  {\ifnum 0=`}\fi \hrule \@height
                  \arrayrulew...
1.9 ....00 & 1.85  & 0.71 \hline
```

More column-formatting commands

The required argument of the `tabular` environment may contain column-formatting commands of various types.

An `@`-*expression,* for instance, `@{.}`, replaces the space LaTeX normally inserts between two columns with its argument. For example,

```
\begin{tabular}{r @{.} l}
   3&78\\
   4&261\\
   4
\end{tabular}
```

creates a table with two columns separated by a decimal point. In effect, you get a single, decimal-aligned column:

3.78
4.261
4.

This example is an illustration. You should use David Carlisle's `dcolumn` package if you need a decimal-aligned column (see Section 12.3.1).

The width of a column depends on the entries in the column by default. You can specify a width by using the `p` column specifier:

`p{`*`width`*`}`

For instance, if you want the first column of Table 6.1 to be 1 inch wide, then type

```
\begin{tabular}{ | p{1in} | r | r | r | }\hline
   Name     &  1    & 2     & 3   \\ \hline
   Peter    &  2.45 & 34.12 & 1.00\\ \hline
   John     &  0.00 & 12.89 & 3.71\\ \hline
   David    &  2.00 & 1.85  & 0.71\\ \hline
\end{tabular}
```

which typesets as

Name	1	2	3
Peter	2.45	34.12	1.00
John	0.00	12.89	3.71
David	2.00	1.85	0.71

To center the items in the first column, precede *each* item with a `\centering` command (see Section 6.3). Note that the first column is actually somewhat over 1 inch wide, because of the extra space provided around the column boundaries.

The `p` column specifier can also be used for multiline entries.

Refinements

`\hline` draws a horizontal line the whole width of the table. `\cline{`*a*`-`*b*`}` draws a horizontal line from column *a* to column *b*. For instance,

`\cline{1-3}` or `\cline{4-4}`

Another useful command is `\multicolumn`, which is used to span more than one column, for example,

```
\multicolumn{3}{c}{\emph{absent}}
```

The first argument is the number of columns spanned by the entry, the second is the alignment (an optional vertical line designator `|` for this row only can also be included), and the third argument is the entry. Note that the entry for the spanned columns is in braces. An example is shown in Table 6.2, typed as follows:

```
\begin{table}[h!]
```

Name	1	2	3
Peter	2.45	34.12	1.00
John	*absent*		
David	2.00	1.85	0.71

Table 6.2: Table with `\multicolumn`.

Name	Month	Week	Amount
Peter	Jan.	1	1.00
		2	12.78
		3	0.71
		4	15.00
	Total		29.49
John	Jan.	1	12.01
		2	3.10
		3	10.10
		4	0.00
	Total		25.21
Grand Total			54.70

Table 6.3: Table with `\multicolumn` and `\cline`.

```
   \begin{center}
      \begin{tabular}{ | l | r | r | r | } \hline
         Name    & 1    & 2     & 3\\ \hline
         Peter   & 2.45 & 34.12 & 1.00\\ \hline
         John    & \multicolumn{3}{c |}{\emph{absent}}\\
         \hline
         David   & 2.00 & 1.85  & 0.71\\ \hline
      \end{tabular}
      \caption{Table with \bsl\texttt{multicolumn}.}
      \label{Ta:mc}
   \end{center}
\end{table}
```

The next example, shown in Table 6.3, uses the `\multicolumn` and `\cline` commands together:

```
\begin{table}[t]
   \begin{center}
      \begin{tabular}{ | c  c  | c | r | } \hline
         Name  & Month & Week & Amount\\ \hline
         Peter & Jan.  & 1    & 1.00\\ \cline{3-4}
               &       & 2    & 12.78\\ \cline{3-4}
               &       & 3    & 0.71\\ \cline{3-4}
               &       & 4    & 15.00\\ \cline{2-4}
               & \multicolumn{2}{| l}{Total} & 29.49\\
               \hline
         John  & Jan.  & 1    & 12.01\\ \cline{3-4}
               &       & 2    & 3.10\\ \cline{3-4}
               &       & 3    & 10.10\\ \cline{3-4}
               &       & 4    & 0.00\\ \cline{2-4}
               & \multicolumn{2}{| l}{Total} & 25.21\\
               \hline
           \multicolumn{3}{|l}{Grand Total} & 54.70\\
           \hline
      \end{tabular}
      \caption{Table with \bsl\texttt{multicolumn}
      and \bsl\texttt{cline}.}\label{Ta:multicol+cline}
   \end{center}
\end{table}
```

The `\parbox` command (see Section 5.9.3) can be used to produce a single multiline entry. Recall that the first argument of `\parbox` is the width of the box. A `p{}` width designator creates a column in which all entries can be multiline. As an example, to replace Grand Total by Grand Total for Peter and John, type the last line as

```
\multicolumn{3}{l}{ \parbox[b]{10em}{Grand Total\\
for Peter and John} } & 54.70\\ \hline
```

Note the use of the bottom alignment option (see Section 5.9.3). The last row of the modified table prints

Grand Total for Peter and John	54.70

The spacing above Grand Total is not quite right. It can be adjusted with a strut (see Section 5.9.5),

```
\parbox[b]{10em}{\strut Grand Total\\
                 for Peter and John:}
```

Finally, vertical spacing can be adjusted by redefining `\arraystretch`. For instance, in the table

	Area	**Students**
5th Grade:	63.4 m^2	22
6th Grade:	62.0 m^2	19
Overall:	62.6 m^2	20

typed as

```
\begin{center}
  \begin{tabular}{|r|c|c|}\hline
       & \textbf{Area}  & \textbf{Students}\\ \hline
    \textbf{5th Grade}: & 63.4 m\textsuperscript{2} &22\\
    \hline
    \textbf{6th Grade}: & 62.0 m\textsuperscript{2} &19\\
    \hline
    \textbf{Overall}: & 62.6 m\textsuperscript{2} &20\\
    \hline
   \end{tabular}
\end{center}
```

you may find that the rows are too crowded. The vertical spacing may be adjusted by adding the line

```
\renewcommand{\arraystretch}{1.25}
```

to the `tabular` environment. To limit its scope, add it after

```
\begin{center}
```

The adjusted table is typeset as

	Area	Students
5th Grade:	63.4 m^2	22
6th Grade:	62.0 m^2	19
Overall:	62.6 m^2	20

In some tables, horizontal and vertical lines do not always intersect as desired. Fine control over these intersections is provided by the `hhline` package (see Section 12.3.1).

Chapter 5 of *The LaTeX Companion,* 2nd edition [46] deals with tabular material, discussing many extensions, including multipage tables, decimal-point alignment, footnotes in tables, tables within tables, and so on.

6.6.1 Table styles

LaTeX can draw double horizontal and vertical lines in tables with ease. As a result, there are far too many double lines in LaTeX tables, resulting in cluttered and confusing tables. *The Chicago Manual of Style,* 15th edition [11] has almost 80 pages on tables. For simple tables it advocates a simple style, as shown in Table 6.4.
Notice

- the generous space above and below the column heads, which has been achieved with the `\rule[-8pt]{0pt}{22pt}` command,
- some extra space above the first line of data, which has been achieved with the `\rule{0pt}{14pt}` command,
- the columns of equal width, which has been achieved with `p{70pt}` commands,
- and no vertical lines.

Most tables in this book have been designed according to this style using Simon Fear's `booktabs` package (see Section E.1).

Table 6.4: Smokers and Nonsmokers, by Sex.

	Smoke	Don't Smoke	Total
Males	1,258	2,104	3,362
Females	1,194	2,752	3.946
Total	2,452	4,856	7,308

6.7 Tabbing environments

Although of limited use for mathematical typesetting, the `tabbing` environment can be useful for typing algorithms, computer programs, and so forth. LaTeX calculates the width of a column in the `tabular` environment based on the widest entry (see Section 6.6). The tabbing environment allows you to control the width of the columns.

The `\\` command is the line separator, tab stops are set by `\=` and are remembered by LaTeX in the order they are given, and `\>` moves to the next tab position.

You can easily reset tab positions. For instance, if you are past the second tab position by using `\>` twice, and there is a third tab position, the `\=` command resets it.

Lines of comments may be inserted with the `\kill` command, see the examples below, or with the `%` character. The difference is that a line with `\kill` can be used to set tab stops, whereas a commented out line cannot.

A simple example:

```
PrintTime
     Block[timing],
          timing = Timing[expr];
          Print[ timing[[1]] ];
     ]
End[]
```

typed as

```
{\ttfamily
\begin{tabbing}
   Print\=Time\\
   \>Block\=[{timing},\\
   \>\>timing = Timing[expr];\\
   (careful with initialization)\kill
   \>\>Print[ timing[[1]] ];\\
   \>]\\
   End[]
\end{tabbing}
}% end \ttfamily
```

An alternative method is to use a line to set the tab stops, and then `\kill` the line so it does not print:

```
{\ttfamily
\begin{tabbing}
   \hspace*{.25in}\=\hspace{2ex}\=\hspace{2ex}\=
```

```
      \hspace{2ex}\kill
  \>  $k := 1$\\
  \>  $l_k := 0$; $r_k := 1$\\
  \>  loop\\
  \>  \> $m_k := (l_k + r_k)/2$\\
  \>  \> if $w < m_k$ then\\
  \>  \>  \> $b_k := 0$; $r_k := m_k$\\
  \>  \> else if $w > m_k$ then\\
  \>  \>  \> $b_k := 1$; $l_k := m_k$\\
  \>  \> end if\\
  \>  \> $k := k + 1$\\
  \> end loop
\end{tabbing}
}% end \ttfamily
```

which typesets as

$k := 1$
$l_k := 0$; $r_k := 1$
loop
  $m_k := (l_k + r_k)/2$
  if $w < m_k$ then
    $b_k := 0$; $r_k := m_k$
  else if $w > m_k$ then
    $b_k := 1$; $l_k := m_k$
  end if
  $k := k + 1$
end loop

Some simple rules:

- There is no \\ command on a line containing the \kill command.
- You may set the tabs in a \kill line with \hspace commands.
- The \> command moves to the next tab stop, even if the text you have already typed extends past that stop, which can result in overprinting.
- The tabbing environment has to be typeset with typewriter style font—note the \ttfamily command.

To illustrate the third rule, type

```
\begin{tabbing}
   This is short.\=\\
   This is much longer, \> and jumps back.
\end{tabbing}
```

which typesets as

This is short.
This is much longer, and jumps back.

If you do not follow the fourth rule, be careful with your tabbing. You do not really have to use typewriter style font—just beware of the pitfalls.

For more information, please consult Chapter 5 of *The LaTeX Companion,* 2nd edition [46].

6.8 Miscellaneous displayed text environments

There are four more displayed text environments, of limited use in math: `quote`, `quotation`, `verse`, and `verbatim`. We also discuss an inline version of the `verbatim` environment, the `\verb` command.

Quotes

The `quote` environment is used for short (one paragraph) quotations:

> It's not that I'm afraid to die. I just don't want to be there when it happens. *Woody Allen*
>
> Literature is news that STAYS news. *Ezra Pound*

which is typed as:

```
\begin{quote}
   It's not that I'm afraid to die. I just don't
   want to be there when it happens.
   \emph{Woody Allen}

   Literature is news that STAYS news.
   \emph{Ezra Pound}
\end{quote}
```

Note that multiple quotes are separated by blank lines.

Quotations

In the `quotation` environment, blank lines mark new paragraphs:

> KATH: Can he be present at the birth of his child?
>
> ED: It's all any reasonable child can expect if the dad is present at the conception.
>
> *Joe Orton*

is typed as

```
\begin{quotation}
   KATH: Can he be present at the birth of his child?

   ED: It's all any reasonable child can expect
   if the dad is present at the conception.
   \begin{flushright}
      \emph{Joe Orton}
   \end{flushright}
\end{quotation}
```

Verses

A `verse` environment,

> I think that I shall never see
> A poem lovely as a tree.
>
> Poems are made by fools like me,
> But only God can make a tree.
>
> *Joyce Kilmer*

is typed as

```
\begin{verse}
   I think that I shall never see\\
   A poem lovely as a tree.

   Poems are made by fools like me,\\
   But only God can make a tree.

   \begin{flushright}
      \emph{Joyce Kilmer}
```

```
   \end{flushright}
\end{verse}
```

Lines are separated by \\ and stanzas by blank lines. Long lines are typeset with hanging indent.

Verbatim typesetting

Finally, there is the `verbatim` text environment. You may need it if you write *about* LaTeX or some other computer program or if you have to include portions of a source file or user input in your typeset work. Most of the displayed source in this book was written in a `verbatim` environment. For instance, you may have to write to a journal about an article you are proofreading:

> Formula (2) in Section 3 should be typed as follows:
>
> ```
> \begin{equation}
> D = \{\, x_0 \mid x_0 \Rightarrow a_1 \,\} \tag{2}
> \end{equation}
> ```
>
> Please make the necessary corrections.

The problem is that if you just type

```
Formula (2) in Section 3 should be typed as follows:
\begin{equation}
    D = \{\, x_0 \mid x_0 \Rightarrow a_1 \,\} \tag{2}
\end{equation}
Please make the necessary corrections.
```

it typesets as

> Formula (2) in Section 3 should be typed as follows:
>
> $$D = \{\, x_0 \mid x_0 \Rightarrow a_1 \,\} \tag{2}$$
>
> Please make the necessary corrections.

To get the proper typeset form, type it as follows:

```
Formula (2) in Section 3 should be typed as follows:
\begin{verbatim}
\begin{equation}
D = \{\, x_0 \mid x_0 \Rightarrow a_1 \,\} \tag{2}
\end{equation}
```

```
\end{verbatim}
Please make the necessary corrections.
```

Rule ■ `verbatim` **text environments**

A `verbatim` environment cannot be placed within

- Another `verbatim` environment
- The argument of a command
- The closing line, `\end{verbatim}`, must be on a line by itself.

A violation of the first rule results in unmatched environment delimiters. You get an error message such as

```
! \begin{document} ended by \end{verbatim}.
```

A violation of the second rule gives an error message such as

```
! Argument of \@xverbatim has an extra }.
```

Tip There are two traps to avoid when using the `verbatim` environment.

1. If the `\end{verbatim}` line starts with spaces, a blank line is added to the typeset version.
2. Any characters following `\end{verbatim}` on the same line are dropped and you get a LaTeX warning.

To illustrate the first trap, type the last two lines of the previous example as follows:

```
␣\end{verbatim}
Please make the necessary corrections.
```

Then you find an unintended blank line before the last line.

The second trap can be seen if you type the last line of the above example as

```
\end{verbatim} Please make the necessary corrections.
```

When typeset, Please make the necessary corrections. does not appear, and you receive a warning

```
LaTeX Warning: Characters dropped after
 `\end{verbatim}' on input line 17.
```

Several improved versions of the `verbatim` environment are provided by the `verbatim` package (see Section 12.3.1). To use this package, include the command

```
\usepackage{verbatim}
```

in the preamble. In fact, the rules discussed in this section are those of the `verbatim` package.

The `verbatim` environment has some interesting variants and a number of them are discussed in Section 3.4 of *The LaTeX Companion,* 2nd edition [46]. For instance, the `alltt` package, which is part of the standard LaTeX distribution (see Section 12.3) is used to type the command syntax in this book. See the full syntax of `\newtheorem` on page 128 for an example.

Verbatim typesetting inline

The `verbatim` environment also has an inline version called `\verb`. Here is an example:

```
Some European e-mail addresses contain \%;
recall that you have to type \verb+\%+ to get \%.
```

which prints

Some European e-mail addresses contain %; recall that you have to type \% to get %.

The character following the `\verb` command is a delimiter. In this example I have used `+`. The argument starts with the character following the delimiter, and it is terminated by the next occurrence of the delimiter. In this example, the argument is `\%`.

Choose the delimiter character carefully. For instance, if you want to typeset

```
$\sin(\pi/2 + \alpha)$
```

verbatim, and you type

```
\verb+$\sin(\pi/2 + \alpha)$+
```

then you get the error message

```
! Missing $ inserted.
<inserted text>
                $
l.5 \verb+$\sin(\pi/2 + \alpha
                                )$+
```

Indeed, the argument of `\verb` is `$\sin(\pi/2` because the second `+` terminates the `\verb` command. Then LaTeX tries to typeset `\alpha)$+`, but cannot because it is not in math mode. Use another character, such as `!`, in place of `+`:

```
\verb!$\sin(\pi/2 + \alpha)$!
```

Rule ■ `verb` **commands**

- The entire `\verb` command must be on a single line of your source file.
- There can be no space between the `\verb` command and the delimiter.
- The `\verb` command cannot appear in the argument of another command.
- The `\verb` command cannot be used within an aligned math environment.
- Do not use `*` as a delimiter.

If you violate the first rule, as in

```
\verb!$\sin(\pi/2 +
\alpha)$!
```

you get the error message

```
! LaTeX Error: \verb command ended by end of line.

l.6 \verb!$\sin(\pi/2 +
```

The `\verb` command has a `*`-ed version which prints spaces as ␣ symbols. For example, `\today␣the` is typed as `\verb*+\today the+`.

The `\verb` command can perform the function of the `verbatim` environment. The last error message, which was displayed in a `verbatim` environment, may be typed as follows:

```
you get the error message\\[8pt]
\verb|! LaTeX Error: \verb command ended by end of line.|\\
\verb| |\\
\verb|l.6 \verb!$\sin(\pi/2 +|\\[8pt]
```

Rule ■ **Simulating** `verbatim` with `verb`

1. End the line before the `verbatim` environment with `\\[8pt]`.
2. Each line *xxx* of the verbatim environment is placed in the construct:

   `\verb|`*xxx*`|`

   If `|` occurs in *xxx*, then choose a different delimiter.

3. The last line *yyy* of the verbatim environment is placed in the construct:

   `\verb|`*yyy*`|\\[8pt]`

   If `|` occurs in *yyy*, then choose a different delimiter.

CHAPTER

7

Typing math

LaTeX was designed for typesetting math. I address this topic in detail.

A math formula can be typeset *inline*, as part of the current paragraph, or *displayed*, on a separate line or lines with vertical space before and after the formula.

In this and the next chapter we discuss formulas that are set inline or displayed on a *single line.* In Chapter 9 we address *multiline* math formulas.

We start with a discussion of LaTeX's basic math environments (Section 7.1), spacing rules in math (Section 7.2), and continue with the `equation` environment (Section 7.3). The basic constructs of a formula—arithmetic (including subscripts and superscripts), binomial coefficients, ellipses, integrals, roots, and text—are discussed in detail in Section 7.4. From the basic constructs of that section, you can build very complicated formulas, one step at a time. The process is illustrated in Section 7.4.7.

Delimiters, operators, and math accents are dealt with in Sections 7.5–7.7. In Section 7.8, we discuss three types of stretchable horizontal lines that can be used above or below a formula: braces, bars, and arrows. There are also stretchable arrow math symbols.

Section 7.9 is our *Formula Gallery,* in which you find a large number of illustrations, some straightforward, some more imaginative, of the math constructs introduced in the preceding sections.

7.1 Math environments

A formula in a LaTeX document can be typeset *inline,* like the congruence $a \equiv b \pod{\theta}$ or the integral $\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$, or *displayed*, as in

$$a \equiv b \pod{\theta}$$

or

$$\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$$

Notice how changing these two formulas from inline to displayed affects their appearance.

Inline and displayed math formulas are typeset using the *math environments* `math` and `displaymath`, respectively. Because math formulas occur so frequently, LaTeX has abbreviations: the special braces `\(` and `\)` or `$` are used for the `math` environment, and `\[` and `\]` for the `displaymath` environment.[1] So our inline example may be typed as

```
$a \equiv b \pod{\theta}$
```

or

```
\( a \equiv b \pod{\theta} \)
```

or

```
\begin{math}
   a \equiv b \pod{\theta}
\end{math}
```

The displayed example can be typed as

```
 \[
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx = \sqrt{\pi}
 \]
```

or

```
\begin{displaymath}
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx = \sqrt{\pi}
\end{displaymath}
```

Using `$` as a delimiter for a `math` environment is a bit of an anomaly, since the same character is used as both an opening and closing delimiter. This dual purpose use makes it more difficult for LaTeX to diagnose an incorrect use of `$`. For instance,

[1] TeX uses `$$` to open and close a displayed math environment. In LaTeX, this may occasionally cause problems. Don't do it! Try the `fleqn` document class option of `amsart` (see Section 11.5) as an example of what can go wrong.

```
Let $a be a real number, and let $f$ be a function.
```

would be interpreted by LaTeX as follows:

- `Let` is ordinary text
- `$a be a real number, and let $` is math
- `f` is interpreted as ordinary text
- `$ be a function.` is thought to be a `math` environment (opened by `$`) that should be closed by the next `$` in the paragraph

Because the paragraph ends with no more dollar signs appearing, you get the error message

```
!! Missing $ inserted.
<inserted text>
                $
l.29
```

and giving you the line number of the end of the paragraph. This message tells you that LaTeX would place a `$` at the end of the paragraph when it proceeds with the typesetting. Press Return and LaTeX produces the following:

Let $abearealnumber, andletfbeafunction.$

The text that ended up in a math environment is run together because math environments ignore spaces (see Section 7.2).

If you use `\(` and `\)` as special braces for the `math` environment, LaTeX handles the same mistake more elegantly:

```
Let \( a be a real number, and let \( f \) be a function.
```

gives the error message

```
! LaTeX Error: Bad math environment delimiter.

l.25 Let \( a be a real number, and let \(
                     f \) be a function.
```

LaTeX realizes that the first `\(` opens a `math` environment, so the second `\(` must be in error. In this case, the line number in the error message is correct.

Throughout this book, like nearly everyone else, I use `$` to delimit inline math.

Rule ■ Math environments

No blank lines are permitted in a `math` or `displaymath` environment.

If you violate this rule, LaTeX generates an error message,

```
! Missing $ inserted.
<inserted text>
                $
...
l.7
```

where the line number points inside the environment.

Multiline math environments, such as the examples in Sections 3.4.2–3.4.3, are discussed in Chapter 9.

7.2 Spacing rules

In text, the most important spacing rule is that any number of spaces in the source file equals one space in the typeset document. The spacing rule for math mode is even more straightforward.

Rule ■ Spacing in math

LaTeX ignores spaces in math.

In other words, all spacing in math mode is provided by LaTeX. For instance,

```
$a+b=c$
```

and

```
$a + b = c$
```

are both typeset as $a + b = c$.

There are two exceptions to this rule:

1. A space indicating the end of a command name is recognized. For instance, in

   ```
   $a \quad b$
   ```

   LaTeX does not ignore the space between `\quad` and `b`.

2. If you switch back to text mode inside a math formula with a `\text` command (see Section 7.4.6), then the text spacing rules apply in the argument of such a command.

So, LaTeX provides controls for spaces in typeset math. The spaces you type in math do not affect the typeset document. But keep this tip in mind.

Tip Format your source file so that it is easy to read.

When typing a source file, the following is good practice:

- Place `\[` and `\]` on lines by themselves.
- Leave spaces before and after binary operations and binary relations, including the equal sign.
- Indent—by three spaces, for example—the contents of environments so they stand out.
- Keep a formula on a single line of the source file, if you can.

Develop your own style of typing math, and stick with it.

Tip The spacing after a comma is different in math and text.

I use the following rule: If the comma could be replaced with the word "and" or "or", then I break the formula and move the comma out of the formula.

Example 1. Type "$a, b \in B$" as

```
$a$, $b \in B$
```

and not as

```
$a, b \in B$
```

Example 2. Type "$x = a$, b, or c" as

```
$x = a$, $b$, or $c$
```

and not as

```
$x = a, b$, or $c$
```

Compare:

$x = a$, b, or c (typed as `$x = a$, $b$, or $c$`)
$x = a, b$, or c (typed as `$x = a, b$, or $c$`)

Example 3. Type "for $i = 1, 2, \ldots, n$" as

"`for $i = 1$,~$2$, \dots,~$n$`"

Tip Do not leave a trailing comma in inline math.

So do not type

```
If $a = b,$ then
```

but move the comma out.

7.3 Equations

An *equation* is a numbered formula displayed on a single typeset line.

Equations are typed in an `equation` environment. The `equation` environment and `displaymath` environment are exactly the same except that the `equation` environment assigns a number to the displayed formula

$$\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi} \tag{1}$$

This example is typed as

```
\begin{equation}\label{E:int}
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx = \sqrt{\pi}
\end{equation}
```

The `\label` command in the equation environment is optional. If you use a `\label` command, the number assigned to the equation can be referenced with the `\ref` command. So

```
see~(\ref{E:int})
```

typesets as see (1). Even better, use the `\eqref` command, which places the parentheses automatically:

```
see~\eqref{E:int}
```

also typesets as see (1). In fact, the `\eqref` command does more: It typesets the reference *upright,* even in italicized or slanted text. For more information about cross-referencing, see Section 10.4.2.

Analogously, the `\upn` command forces the use of upright characters for digits, punctuations, parentheses, etc.

LaTeX numbers equations consecutively. As a rule, equations are numbered consecutively throughout articles, whereas in books, numbering starts from 1 at the start of each chapter. You may also choose to have equations numbered within each section—(1.1), (1.2), ..., in Section 1; (2.1), (2.2), ..., in Section 2; and so on—by including the command

```
\numberwithin{equation}{section}
```

in the preamble of your document (see Section 10.2). "Manual control" of numbering is discussed in Section 15.5.1, group numbering in Section 9.4.4.

The `*`-ed form of the `equation` environment suppresses numbering, so it is equivalent to the `displaymath` environment (or the special braces `\[` and `\]`).

Rule ■ Equation environment
No blank lines are permitted within an `equation` or `equation*` environment.

If you typeset

```
\begin{equation}\label{E:int}
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx = \sqrt{\pi}

\end{equation}
```

LaTeX generates the familiar, but misleading, error message

```
! Missing $ inserted.
```

7.4 Basic constructs

A formula is built up by combining various basic constructs. This section discusses the following constructs:

- Arithmetic operations
  - Subscripts and superscripts
- Binomial coefficients
- Ellipses
- Integrals
- Roots

Read carefully the basic constructs *important for your work*. Additional constructs are discussed in subsequent sections.

7.4.1 Arithmetic operations

The *arithmetic operations* are typed pretty much as you would expect. To get $a + b$, $a - b$, $-a$, a/b, and ab, type

```
$a + b$, $a - b$, $-a$, $a / b$, $a b$
```

There are two other forms of multiplication and one of division: $a \cdot b$, $a \times b$, and $a \div b$. They are typed as follows:

```
$a \cdot b$,  $a \times b$,  $a \div b$
```

In displayed formulas, *fractions* are usually typed with the `\frac` command. To get

$$\frac{1 + 2x}{x + y + xy}$$

type

```
\[
   \frac{1 + 2x}{x + y + xy}
\]
```

You can use display-style fractions inline with `\dfrac`, and inline-style fractions in displayed math environments with `\tfrac`; for example, $\dfrac{3 + a^2}{4 + b}$ is typed as `$\dfrac{3 + a^{2}}{4 + b}$` and

$$\tfrac{3+a^2}{4+b}$$

is typed as

```
\[
  \tfrac{3 + a^{2}}{4 + b}
\]
```

The `\dfrac` command is often used in matrices whose entries would look too small with the `\frac` command. See Formula 20 in the *Formula Gallery* (Section 7.9) for an example, and Section 8.6.1 for other fraction variants.

Subscripts and superscripts

Subscripts are typed with `_` and *superscripts* with `^`. Remember to enclose the subscripted or superscripted expression in braces:

```
\[
   a_{1},\ a_{i_{1}},\ a^{2},\  a^{b^{c}},\ a^{i_{1}},\
      a_{i} + 1,\ a_{i + 1},\ a_{1}^{2},\ a^{2}_{1}
\]
```

typesets as

$$a_1,\ a_{i_1},\ a^2,\ a^{b^c},\ a^{i_1},\ a_i + 1,\ a_{i+1},\ a_1^2,\ a_1^2$$

For a^{b^c}, type `$a^{b^{c}}$`, not `$a^{b}^{c}$`. If you type the latter, you get the error message

```
! Double superscript.
```

Similarly, a_{b_c} is typed as `$a_{b_{c}}$`, not as `$a_{b}_{c}$`.

In many instances, the braces for the subscripts and superscripts could be omitted, but you should type them anyway.

Tip You may safely omit the braces for a subscript or superscript that is a single digit or letter, as in `$a_1$` and `$(a + b)^x$`, which are typeset as a_1 and $(a+b)^x$. Be careful, however. If you have to edit `$a_1$` to make it a_{12}, then the braces can no longer be omitted, you must type `$a_{12}$` to obtain a_{12} because `$a_12$` typesets as $a_1 2$.

There is one symbol that is automatically superscripted in math mode, the prime, that is, `'`. To get $f'(x)$, type `$f'(x)$`. However, to get f'^2 you must type

```
$f^{\prime 2}$
```

Typing `${f'}^{2}$` results in ${f'}^2$, with the 2 too high; typing it as `$f'^{2}$` causes a double superscript error. Sometimes you may want a symbol to appear superscripted or subscripted by itself, as in the phrase

use the symbol † to indicate the dualspace

typed as

```
use the symbol ${}^{\dagger}$ to indicate the dualspace
```

where `{}` is the *empty group*. The empty group can be used to separate symbols, to terminate commands, or as the base for subscripting and superscripting.

The `\sb` and `\sp` commands also typeset subscripts and superscripts, respectively, as in

```
$a\sb{1} - a\sp{x + y}$
```

which produces $a_1 - a^{x+y}$. These commands are seldom used, however, except in the `alltt` environment (see Section 12.3) and in the *Mathematical Reviews* of the AMS.

For multiline subscripts and superscripts, see Section 7.6.5.

7.4.2 Binomial coefficients

Binomials are typeset with the `\binom` command. Here are two examples shown inline, $\binom{a}{b+c}$ and $\binom{\frac{n^2-1}{2}}{n+1}$, and displayed:

$$\binom{a}{b+c} \text{ and } \binom{\frac{n^2-1}{2}}{n+1}$$

The latter is typed as

```
\[
   \binom{a}{b + c} \text{ and }
   \binom{\frac{n^{2} - 1}{2}}{n + 1}
\]
```

You can use display-style binomials inline with `\dbinom`, and inline-style binomials in displayed math environments with `\tbinom`. For example, $\binom{a}{b+c}$ is typed as `$\dbinom{a}{b + c}$`. See Section 8.6.1 for other variants.

7.4.3 Ellipses

There are two types of *ellipsis* in math, the *low* or *on-the-line ellipsis*, as in

$$F(x_1, x_2, \ldots, x_n)$$

and the *centered ellipsis*, as in

$$x_1 + x_2 + \cdots + x_n$$

These two formulas are typed as

```
\[
   F(x_{1}, x_{2}, \dots, x_{n})
\]
```

and

```
\[
   x_{1} + x_{2} + \dots + x_{n}
\]
```

LaTeX uses the symbol following a `\dots` command to decide whether to use a low or centered ellipsis. If it fails to make the right decision as in

$$\alpha(x_1 + x_2 + \ldots)$$

typed as

```
\[
   \alpha(x_{1} + x_{2} + \dots)
\]
```

help LaTeX by giving the command `\ldots` for low and `\cdots` for centered ellipsis. So to get the last formula right, type

```
\[
   \alpha(x_{1} + x_{2} + \cdots)
\]
```

and it typesets correctly:

$$\alpha(x_1 + x_2 + \cdots)$$

There are five more variants of the `\dots` command:

- `\dotsc`, for an ellipsis followed by a comma
- `\dotsb`, for an ellipsis followed by a binary operation or relation
- `\dotsm`, for an ellipsis followed by multiplication
- `\dotsi`, for an ellipsis with integrals
- `\dotso`, for an "other" ellipsis

These commands not only force the ellipsis to be low or centered, but also adjust the spacing.

See Section 9.7.1 for an example of *vertical dots* with the `\vdots` command and *diagonal dots* with the `\ddots` command.

7.4.4 Integrals

You have already seen the formula $\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$ in both inline and displayed forms in the first section of this chapter. The lower limit is typeset as a subscript and the upper limit is typeset as a superscript. To force the limits below and above the integral symbol, use the `\limits` command. The `\nolimits` command does the reverse. To typeset $\int\limits_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$, type

```
$\int\limits_{-\infty}^{\infty} e^{-x^2} \, dx
   = \sqrt{\pi}$
```

See Section 11.5 for a discussion of the `intlimits` document class option.

There are five commands to produce variants of the basic integral symbol:

```
\oint  \iint  \iiint  \iiiint  \idotsint
```

which typeset as

$$\oint \quad \iint \quad \iiint \quad \iiiint \quad \int\cdots\int$$

For complicated bounds, use the `\substack` command or the `subarray` environment (see Section 7.6.5).

7.4.5 Roots

The `\sqrt` command produces a square root, for instance,

`$\sqrt{5}$`	typesets as	$\sqrt{5}$
`$\sqrt{a + 2b + c^{2}}$`	typesets as	$\sqrt{a + 2b + c^2}$

Here is a more interesting example:

$$\sqrt{1+\sqrt{1+\frac{1}{2}\sqrt{1+\frac{1}{3}\sqrt{1+\frac{1}{4}\sqrt{1+\cdots}}}}}$$

typed as

```
\[
   \sqrt{1 + \sqrt{1 + \frac{1}{2}\sqrt{1 + \frac{1}{3}
    \sqrt{1 + \frac{1}{4}\sqrt{1 + \cdots}}}}}
\]
```

For n-th roots other than the square root, that is, $n \neq 2$, specify n with an optional argument. To get $\sqrt[3]{5}$, type `$\sqrt[3]{5}$`.

Root refinement

In $\sqrt[g]{5}$, typed as `$\sqrt[g]{5}$`, the placement of g is not very pleasing. LaTeX provides two additional commands to allow you to adjust the position of g:

`\leftroot` moves g *left*—or *right* with a negative argument

`\uproot` moves g *up*—or *down* with a negative argument

You may prefer one of the following variants:

$\sqrt[g]{5}$	typed as	`$\sqrt[\leftroot{2} \uproot{2} g]{5}$`
$\sqrt[g]{5}$	typed as	`$\sqrt[\uproot{2} g]{5}$`

Experiment with `\leftroot` and `\uproot` to find the best spacing.

Note that LaTeX is very finicky with this optional argument. Typing a space after `[`, as in `$\sqrt[ \uproot{2} g]{5}$`, gives the error message

```
! Package amsmath Error: Invalid use of \uproot.
```

There may also be problems with vertical spacing under the root symbol (see Section 8.4).

7.4.6 Text in math

LaTeX allows you to include text in formulas with the `\text` command. The formula

$$A = \{\, x \mid x \in X_i, \text{ for some } i \in I \,\}$$

is typed as

```
\[
   A = \{\, x \mid x \in X_{i}, \text{ for some }
       i \in I \,\}
\]
```

Note that you have to leave space before `for` and after `some` inside the argument of `\text`. The argument of the `\text` command is always typeset in a single line.

Sometimes it is more convenient to go into math mode within the argument of a `\text` command rather than end the `\text` and start another, as in

$$A = \{\, x \mid \text{for } x \text{ large} \,\}$$

which is typed as

```
\[
   A = \{\, x \mid \text{for $x$ large} \,\}
\]
```

The `\text` command correctly sizes its argument to match the context. The formula

$$a_{\text{left}} + 2 = a_{\text{right}}$$

is typed as

```
\[
   a_{\text{left}} + 2 = a_{\text{right}}
\]
```

Note that `\text` typesets its argument *in the size and shape* of the surrounding text. If you want the text in a formula to be typeset in the document font family (see Section 5.6.2) independent of the surrounding text, use

```
\textnormal{ ... }
```

or

```
{\normalfont ...}
```

For instance, if you have a constant a_{right}, then in a theorem:

Theorem 1. *The constant a_{right} is recursive in a.*

The subscript is wrong. To get it right, type the constant as

```
$a_{\normalfont\text{right}}$
```

Now the theorem typesets as

Theorem 1. *The constant a_{right} is recursive in a.*

Any of the text font commands with arguments (see Section 5.6.3) can also be used in math formulas. For instance, `\textbf` uses the size and shape of the surrounding text to typeset its argument in bold (extended).

7.4.7 Building a formula step-by-step

It is easy to build up complex formulas from the components described in this section. Try the formula

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

Build this formula in several steps. Create a new file in your `work` folder. Name it `formula.tex`, type in the following lines, and save it:

```
% File: formula.tex
\documentclass{amsart}
\usepackage{amssymb,latexsym}
\begin{document}
\end{document}
```

At present, the file has an empty `document` environment. Type each part of the formula as an inline or displayed formula within this environment so that you can typeset the document and check for errors.

Step 1 We start with $\left[\frac{n}{2}\right]$. Type the following line into `formula.tex`:

```
$\left[ \frac{n}{2} \right]$
```

and test it by typesetting the document.

Step 2 Now you can do the sum

$$\sum_{i=1}^{\left[\frac{n}{2}\right]}$$

For the superscript, you can copy and paste the formula created in Step 1 (without the dollar signs), so that you have

```
\[
   \sum_{i = 1}^{ \left[ \frac{n}{2} \right] }
\]
```

Step 3 Next, do the two formulas in the binomial

$$x_{i,i+1}^{i^2} \qquad \left[\frac{i+3}{3}\right]$$

Type them as separate formulas in `formula.tex`:

```
\[
    x_{i, i + 1}^{i^{2}}\qquad\left[ \frac{i + 3}{3} \right]
\]
```

Step 4 Now it is easy to do the binomial. Piece together the following formula by copying and pasting the previous formulas and dropping the \qquad command:

```
\[
   \binom{x_{i,i + 1}^{i^{2}}}{\left[\frac{i + 3}{3}\right]}
\]
```

which typesets as

$$\binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]}$$

Step 5 Next, type the formula under the square root, $\mu(i)^{\frac{3}{2}}(i^2-1)$:

```
$\mu(i)^{ \frac{3}{2} } (i^{2} - 1)$
```

and then the square root, $\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}$:

```
$\sqrt{ \mu(i)^{ \frac{3}{2} } (i^{2} - 1) }$
```

Step 6 The two cube roots, $\sqrt[3]{\rho(i)-2}$ and $\sqrt[3]{\rho(i)-1}$, are easy to type:

```
$\sqrt[3]{ \rho(i) - 2 }$  $\sqrt[3]{ \rho(i) - 1 }$
```

Step 7 Now the fraction

$$\frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

is typed, copied, and pasted together as

```
\[
   \frac{ \sqrt{ \mu(i)^{ \frac{3}{2}} (i^{2} -1) } }
        { \sqrt[3]{\rho(i) - 2} + \sqrt[3]{\rho(i) - 1} }
\]
```

Step 8 Finally, the whole formula,

$$\sum_{i=1}^{\left[\frac{n}{2}\right]} \binom{x_{i,i+1}^{i^2}}{\left[\frac{i+3}{3}\right]} \frac{\sqrt{\mu(i)^{\frac{3}{2}}(i^2-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}$$

is formed by copying and pasting the pieces together, leaving only one pair of displayed math delimiters:

```
\[
   \sum_{i = 1}^{ \left[ \frac{n}{2} \right] }
      \binom{ x_{i, i + 1}^{i^{2}} }
            { \left[ \frac{i + 3}{3} \right] }
      \frac{ \sqrt{ \mu(i)^{ \frac{3}{2}} (i^{2} - 1) } }
           {\sqrt[3]{\rho(i)-2} + \sqrt[3]{\rho(i) - 1}}
\]
```

Note the use of

- Hierarchical indentation, to keep track of the structure of the formula
- Spacing to help highlight the braces—some text editors help you balance braces
- Separate lines for the various pieces of formulas that are more than a line long

It is to your advantage to *keep your source file readable*. LaTeX does not care how its input is formatted, and would happily accept the following:

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}\binom{x_{i,i+1}
^{i^{2}}}{\left[\frac{i+3}{3}\right]}\frac{\sqrt{\mu(i)
^{\frac{3}{2}}(i^{2}-1)}}{\sqrt[3]{\rho(i)-2}+\sqrt[3]
{\rho(i)-1}}\]
```

But this haphazard style not only makes it more difficult for your coauthors or editor to work with your source file, it also makes finding mistakes difficult. Try to find the error in the next version:

```
\[\sum_{i=1}^{\left[\frac{n}{2}\right]}
\binom{x_{i,i+1}^{i^{2}}}{\left[\frac{i+3}{3}\right]}
\frac{\sqrt{\mu(i)^{\frac{3}{2}}}(i^{2}-1)}}{\sqrt[3]
{\rho(i)-2}+\sqrt[3]{\rho(i)-1}}\]
```

Answer: `\frac{3}{2` should be followed by `}}` and not by `}}}`.

7.5 Delimiters

Delimiters are used to enclose some subformulas. In the following formula we use two delimiters: parentheses and square brackets: `$[(a*b)+(c*d)]^2$`; this typesets as $[(a * b) + (c * d)]^2$. LaTeX knows that parentheses and square brackets are delimiters, and spaces them accordingly.

The standard delimiters are shown in Table 7.1.

Note that delimiters are math symbols with special spacing rules and you can use them in any way you please, not only in pairs. LaTeX does not stop you from typing `\uparrow(x)]`, which typesets as $\uparrow (x)]$.

Observe the difference in spacing between $||a||$ and $\|a\|$. The first, $||a||$, was typed incorrectly as `$|| a ||$`. As a result, the vertical bars are too far apart. The second

Name	Type	Typeset
left parenthesis	`(`	$($
right parenthesis	`)`	$)$
left bracket	`[` or `\lbrack`	$[$
right bracket	`]` or `\rbrack`	$]$
left brace	`\{` or `\lbrace`	$\{$
right brace	`\}` or `\rbrace`	$\}$
backslash	`\backslash`	$\backslash$
forward slash	`/`	$/$
left angle bracket	`\langle`	$\langle$
right angle bracket	`\rangle`	$\rangle$
vertical line	`|` or `\vert`	$\vert$
double vertical line	`\\|` or `\Vert`	$\Vert$
left floor	`\lfloor`	$\lfloor$
right floor	`\rfloor`	$\rfloor$
left ceiling	`\lceil`	$\lceil$
right ceiling	`\rceil`	$\rceil$
upward	`\uparrow`	$\uparrow$
double upward	`\Uparrow`	$\Uparrow$
downward	`\downarrow`	$\downarrow$
double downward	`\Downarrow`	$\Downarrow$
up-and-down	`\updownarrow`	$\updownarrow$
double up-and-down	`\Updownarrow`	$\Updownarrow$
upper-left corner	`\ulcorner`	$\ulcorner$
upper-right corner	`\urcorner`	$\urcorner$
lower-left corner	`\llcorner`	$\llcorner$
lower-right corner	`\lrcorner`	$\lrcorner$

Table 7.1: Standard delimiters.

was typed correctly using the appropriate delimiter commands: `$\| a \|$`. Here they are again side-by-side, enlarged: $\big|\big|a\big|\big|$ $\big\|a\big\|$.

7.5.1 Stretching delimiters

All delimiters, except the four "corners", can stretch to enclose the subformula. For example,

$$\left(\frac{1}{2} \right)^{\alpha}$$

is typed as

```
\[
   \left( \frac{1}{2} \right)^{\alpha}
\]
```

The `\left` and `\right` commands instruct LaTeX to stretch the parentheses.

The general construction is

`\left` *`delim1`* and `\right` *`delim2`*

where *`delim1`* and *`delim2`* are chosen from Table 7.1. They are usually, but not always, a matching pair—see the examples below. LaTeX inspects the formula between the `\left` and `\right` commands and decides what size delimiters to use. The `\left` and `\right` commands *must be paired* in order for LaTeX to know the extent of the material to be vertically measured. However, the delimiters need not be the same.

If you want to stretch a single delimiter, you have to pair it with a *blank delimiter*, represented by the `\left.` and `\right.` commands.

Here are some examples of stretching delimiters:

$$\left|\frac{a+b}{2}\right|, \quad \left\|A^2\right\|, \quad \left(\frac{a}{2}, b\right], \quad F(x)\Big|_a^b$$

typed as

```
\[
   \left| \frac{a + b}{2} \right|, \quad
   \left\| A^{2} \right\|,          \quad
   \left( \frac{a}{2}, b \right],   \quad
   \left. F(x) \right|_{a}^{b}
\]
```

There are also two convenient abbreviations:

`\left<` for `\left\langle`
`\right>` for `\right\rangle`

The `\left` and `\right` commands have one more use. For the delimiters `|`, `\|`, and all the arrows, the same symbol represents the left and right delimiters, which can sometimes cause problems as in Example 2 in Section 8.1.4. In such cases, you should use the `\left` and `\right` commands to tell LaTeX whether the delimiter is a left or a right delimiter. LaTeX also provides the `\lvert` and `\rvert` for `|` as left and right delimiter, and `\lVert` and `\rVert` for `\|`.

7.5.2 Delimiters that do not stretch

LaTeX provides the `\big`, `\Big`, `\bigg`, and `\Bigg` commands to produce delimiters of larger sizes. These delimiters do not stretch. For example,

```
\[
   (\quad \big(\quad \Big(\quad \bigg(\quad \Bigg(
\]
```

typesets as

$$(\; \bigl(\; \Bigl(\; \biggl(\; \Biggl($$

LaTeX also provides the more specific
`\bigl`, `\Bigl`, `\biggl`, `\Biggl`, `\bigr`, `\Bigr`, `\biggr`, and `\Biggr`
commands to produce larger left and right delimiters.

For integral evaluation, you can choose one of the following:

$$F(x)\Big|_a^b \quad F(x)\Big|_a^b \quad F(x)\Big|_a^b$$

typed as

```
\[
   F(x) |^{b}_{a}        \quad
   F(x) \bigr|^{b}_{a}   \quad
   F(x) \Bigr|^{b}_{a}
\]
```

7.5.3 Limitations of stretching

In a number of situations the stretching done by LaTeX is not ideal, so you should use a larger sized non-stretching variant. Here are some typical examples:

1. Large operators

```
\[
   \left[ \sum_i a_i \right]^{1/p} \quad
      \biggl[ \sum_i a_i \biggr]^{1/p}
\]
```

typesets as

$$\left[\sum_i a_i\right]^{1/p} \quad \biggl[\sum_i a_i\biggr]^{1/p}$$

You may prefer the second version with `\biggl[` and `\biggr]`.

2. Groupings

```
\[
   \left( (a_1 b_1) - (a_2 b_2) \right)
   \left( (a_2 b_1) + (a_1 b_2) \right)
   \quad
```

```
   \bigl( (a_1 b_1) - (a_2 b_2) \bigr)
   \bigl( (a_2 b_1) + (a_1 b_2) \bigr)
\]
```

typesets as

$$\bigl((a_1b_1) - (a_2b_2)\bigr)\bigl((a_2b_1) + (a_1b_2)\bigr) \quad \bigl((a_1b_1) - (a_2b_2)\bigr)\bigl((a_2b_1) + (a_1b_2)\bigr)$$

You may prefer the clearer groupings provided by `\bigl(` and `\bigr)`.

3. Inline formulas

The delimiters produced by `\left` and `\right` use too much interline space in $\left|\frac{b'}{d'}\right|$, typed as

```
\left\lvert \frac{b'}{d'} \right\rvert
```

Use `\bigl` and `\bigr` to produce delimiters that fit within the normal line spacing: $\bigl|\frac{b'}{d'}\bigr|$, typed as

```
\bigl\lvert \frac{b'}{d'} \bigr\rvert
```

7.5.4 Delimiters as binary relations

The symbol | can be used as a delimiter, as in $|x + y|$, and also as a binary relation, as in $\{\, x \in \mathcal{R} \mid x^2 \leq 2 \,\}$. As a binary relation it is typed as `\mid`. The previous formula is typed as

```
$\{\, x \mid x^{2} \leq 2 \,\}$
```

`\bigm` and `\biggm` produce larger variants, with spacing on either side like binary relations. For example,

$$\left\{ x \,\middle|\, \int_0^x t^2\,dt \leq 5 \right\}$$

is typed as

```
\[
 \left\{\, x \biggm|\int_{0}^x t^{2}\, dt\leq 5\,\right\}
\]
```

7.6 Operators

You cannot just type `sin x` to typeset the sine function in math mode. Indeed,

```
$sin x$
```

produces $sinx$ instead of $\sin x$, as you intended. Type this function as

```
$\sin x$
```

The `\sin` command prints $\sin$ with the proper style and spacing. LaTeX calls `\sin` an *operator* or $\log$*-like function*.

7.6.1 Operator tables

There are two types of operators:

1. *Operators without limits*, such as `\sin`
2. *Operators with limits*, such as `\lim`, that take a subscript in inline mode and a "limit" in displayed math mode. For example, $\lim_{x\to 0} f(x) = 1$ is typed as

   ```
   $\lim_{x \to 0}  f(x) = 1$
   ```

   The same formula displayed,

   $$\lim_{x\to 0} f(x) = 1$$

   is typed as

   ```
   \[
      \lim_{x \to 0} f(x) = 1
   \]
   ```

The operators are listed in Tables 7.2 and 7.3 (see also Section B.6). The entries in the last two rows of Table 7.3 can be illustrated by

$$\underline{\lim_{x\to 0}} \quad \overline{\lim_{x\to 0}} \quad \varinjlim_{x\to 0} \quad \varprojlim_{x\to 0}$$

which are typed as

```
\[
   \varliminf_{x \to 0} \quad  \varlimsup_{x \to 0}  \quad
   \varinjlim_{x \to 0} \quad  \varprojlim_{x \to 0}
\]
```

The following examples illustrate some more entries from Table 7.3:

$$\operatorname*{inj\,lim}_{x\to 0} \quad \liminf_{x\to 0} \quad \limsup_{x\to 0} \quad \operatorname*{proj\,lim}_{x\to 0}$$

These operators were typed as

```
\[
   \injlim_{x \to 0} \quad \liminf_{x \to 0} \quad
   \limsup_{x \to 0} \quad \projlim_{x \to 0}
\]
```

You can force the limits in a displayed formula into the subscript position with the `\nolimits` command. For example, the formulas

$$\injlim_{x\to 0} \quad \liminf_{x\to 0} \quad \limsup_{x\to 0} \quad \projlim_{x\to 0}$$

are typed as

```
\[
   \injlim\nolimits_{x \to 0} \quad
   \liminf\nolimits_{x \to 0} \quad
   \limsup\nolimits_{x \to 0} \quad
   \projlim\nolimits_{x \to 0}
\]
```

Type	Typeset	Type	Typeset	Type	Typeset	Type	Typeset
`\arccos`	arccos	`\cot`	cot	`\hom`	hom	`\sin`	sin
`\arcsin`	arcsin	`\coth`	coth	`\ker`	ker	`\sinh`	sinh
`\arctan`	arctan	`\csc`	csc	`\lg`	lg	`\tan`	tan
`\arg`	arg	`\deg`	deg	`\ln`	ln	`\tanh`	tanh
`\cos`	cos	`\dim`	dim	`\log`	log		
`\cosh`	cosh	`\exp`	exp	`\sec`	sec		

Table 7.2: Operators without limits.

Type	Typeset	Type	Typeset
`\det`	det	`\limsup`	lim sup
`\gcd`	gcd	`\max`	max
`\inf`	inf	`\min`	min
`\lim`	lim	`\Pr`	Pr
`\liminf`	lim inf	`\sup`	sup
`\injlim`	inj lim	`\projlim`	proj lim
`\varliminf`	$\underline{\lim}$	`\varlimsup`	$\overline{\lim}$
`\varinjlim`	$\varinjlim$	`\varprojlim`	$\varprojlim$

Table 7.3: Operators with limits.

7.6.2 Defining operators

The powerful `\DeclareMathOperator` command defines a new operator:

`\DeclareMathOperator{\`*`opCommand`*`}{`*`opName`*`}`

Invoke the new operator with `\`*`opCommand`*, which is then typeset with *opName*.
The `\DeclareMathOperator` command must be placed in the preamble. For example, to define the operator $\mathrm{Truncat}$, invoked by the command `\Trunc`, place this in the preamble:

```
\DeclareMathOperator{\Trunc}{Truncat}
```

An operator is typeset in math roman with a little space after it, so `$\Trunc A$` typesets as $\mathrm{Truncat}\,A$.

The second argument is typeset in math mode but `-` and `*` are typeset as they would be in text. Here are some more examples. Define in the preamble two operators:

```
\DeclareMathOperator{\Trone}{Trunc_{1}}
\DeclareMathOperator{\Ststar}{Star-one*}
```

Then in the body of the article
`$\Trone A$` is typeset as $\mathrm{Truncat}_1\,A$
`$\Ststar A$` is typeset as $\mathrm{Star\text{-}one}^*\,A$

To define an operator with limits, use the `*`-ed form

```
\DeclareMathOperator*{\doublesum}{\sum\sum}
```

and then (see Section 7.6.5 for multiline subscripts)

```
\[
    \doublesum_{\begin{subarray}{l}
            i^2+j^2 = 50\\
            i,\ j \leq 10
            \end{subarray}}
            \frac{x^i + y^j}{(i + j)!}
\]
```

typesets as

$$\sum_{\substack{i^2+j^2=50\\ i,\ j\leq 10}}\sum \frac{x^i + y^j}{(i + j)!}$$

7.6.3 Congruences

`\mod` is a special operator used for congruences. Congruences are usually typeset using the `\pmod` or `\pod` variant. There is also the `\bmod` command, which is used as a binary operation. All four commands are shown in Figure 7.4.

See Sections 15.1.2 and 15.1.8 for a discussion of related user-defined commands.

Type	Typeset
`$a \equiv v \mod{\theta}$`	$a \equiv v \mod \theta$
`$a \bmod b$`	$a \bmod b$
`$a \equiv v \pmod{\theta}$`	$a \equiv v \pmod \theta$
`$a \equiv v \pod{\theta}$`	$a \equiv v \ (\theta)$

Table 7.4: Congruences.

7.6.4 Large operators

Here is a sum typeset inline, $\sum_{i=1}^{n} x_i^2$, and displayed,

$$\sum_{i=1}^{n} x_i^2$$

In the latter form, the sum symbol is larger. Operators that behave in this way are called *large operators.* Table 7.5 gives a complete list of large operators.

You can use the `\nolimits` command if you wish to show the limits of large operators as subscripts and superscripts in a displayed math environment.

The formula

$$\bigsqcup\nolimits_{\mathfrak{m}} X = a$$

is typed as

```
\[
   \bigsqcup\nolimits_{ \mathfrak{m} } X = a
\]
```

You can use the `\limits` command if you wish to show the limits of large operators below and above the operator symbol in an inline math environment. For example, $\bigsqcup\limits_{\mathfrak{m}} X = a$ is typed as

```
$\bigsqcup\limits_{ \mathfrak{m} } X = a$
```

Sums and products are very important constructs. The examples

$$\frac{z^d - z_0^d}{z - z_0} = \sum_{k=1}^{d} z_0^{k-1} z^{d-k} \quad \text{and} \quad (T^n)'(x_0) = \prod_{k=0}^{n-1} T'(x_k)$$

are typed as

```
\[
   \frac{z^{d} - z_{0}^{d}}
        {z - z_{0}} =
```

Type	Inline	Displayed
`\int_{a}^{b}`	$\int_a^b$	$\int_a^b$
`\oint_{a}^{b}`	$\oint_a^b$	$\oint_a^b$
`\iint_{a}^{b}`	$\iint_a^b$	$\iint_a^b$
`\iiint_{a}^{b}`	$\iiint_a^b$	$\iiint_a^b$
`\iiiint_{a}^{b}`	$\iiiint_a^b$	$\iiiint_a^b$
`\idotsint_{a}^{b}`	$\int\cdots\int_a^b$	$\int\cdots\int_a^b$
`\prod_{i=1}^{n}`	$\prod_{i=1}^{n}$	$\prod_{i=1}^{n}$
`\coprod_{i=1}^{n}`	$\coprod_{i=1}^{n}$	$\coprod_{i=1}^{n}$
`\bigcap_{i=1}^{n}`	$\bigcap_{i=1}^{n}$	$\bigcap_{i=1}^{n}$
`\bigcup_{i=1}^{n}`	$\bigcup_{i=1}^{n}$	$\bigcup_{i=1}^{n}$
`\bigwedge_{i=1}^{n}`	$\bigwedge_{i=1}^{n}$	$\bigwedge_{i=1}^{n}$
`\bigvee_{i=1}^{n}`	$\bigvee_{i=1}^{n}$	$\bigvee_{i=1}^{n}$
`\bigsqcup_{i=1}^{n}`	$\bigsqcup_{i=1}^{n}$	$\bigsqcup_{i=1}^{n}$
`\biguplus_{i=1}^{n}`	$\biguplus_{i=1}^{n}$	$\biguplus_{i=1}^{n}$
`\bigotimes_{i=1}^{n}`	$\bigotimes_{i=1}^{n}$	$\bigotimes_{i=1}^{n}$
`\bigoplus_{i=1}^{n}`	$\bigoplus_{i=1}^{n}$	$\bigoplus_{i=1}^{n}$
`\bigodot_{i=1}^{n}`	$\bigodot_{i=1}^{n}$	$\bigodot_{i=1}^{n}$
`\sum_{i=1}^{n}`	$\sum_{i=1}^{n}$	$\sum_{i=1}^{n}$

Table 7.5: Large operators.

```
   \sum_{k = 1}^{d} z_{0}^{k - 1} z^{d - k}
   \text{\quad and\quad}
   (T^{n})'(x_{0}) = \prod_{k=0}^{n - 1} T'(x_{k})
\]
```

7.6.5 Multiline subscripts and superscripts

The `\substack` command provides multiline limits for large operators. For instance,

$$\sum_{\substack{i<n\\ i \text{ even}}} x_i^2$$

is typed as

```
\[
   \sum_{ \substack{ i < n\\
                     i \text{ even} } }
    x_{i}^{2}
\]
```

There is only one rule to remember. Use the line separator command `\\`. You can use the `\substack` command wherever subscripts or superscripts are used.

The lines are centered by `\substack`, so if you want them set flush left, as in

$$\sum_{\substack{i<n\\ i \text{ even}}} x_i^2$$

then use the `subarray` environment with the argument `l`:

```
\[
   \sum_{ \begin{subarray}{l}
             i < n\\
             i \text{ even}
          \end{subarray} }
     x_{i}^{2}
\]
```

See Section 7.6.2 for another example.

7.7 Math accents

The accents used in text (see Section 5.4.7) cannot be used in math formulas. For accents in formulas a separate set of commands is provided. All math accents are shown in Table 7.6 (see also Section B.8). The `amsxtra` package is needed for the accents in the second column. To use them, make sure to place the line

```
\usepackage{amsxtra}
```

in the preamble. For instance, `$a\spbreve \ b\spddot\ c\sptilde$` typesets as $a^{\smile}\ b^{\cdot\cdot}\ c^{\sim}$.

You can also use double accents, such as

```
\[
   \hat{\hat{A}}
\]
```

which typesets as $\hat{\hat{A}}$.

The two "wide" varieties, `\widehat` and `\widetilde`, expand to fit the symbols (their arguments) covered: $\widehat{A}$, $\widehat{ab}$, $\widehat{iii}$, $\widehat{aiai}$, $\widehat{iiiii}$, and $\widetilde{A}$, $\widetilde{ab}$, $\widetilde{iii}$, $\widetilde{aiai}$, $\widetilde{iiiii}$ (the last example is typed as `$\widetilde{iiiii}$`). If the base is too wide, the accent is centered:

$$\widehat{ABCDE}$$

The "sp" commands, provided by the `amsxtra` package, are used for superscripts, as illustrated in Table 7.6. If you use a lot of accented characters, you should appreciate user-defined commands (see Section 15.1.1).

Notice the difference between $\bar{a}$ and $\overline{a}$, typed as

```
$\bar{a}$ $\overline{a}$
```

		amsxtra	
Type	Typeset	Type	Typeset
`\acute{a}`	$\acute{a}$		
`\bar{a}`	$\bar{a}$		
`\breve{a}`	$\breve{a}$	`\spbreve`	$\spbreve$
`\check{a}`	$\check{a}$	`\spcheck`	$\spcheck$
`\dot{a}`	$\dot{a}$	`\spdot`	$\spdot$
`\ddot{a}`	$\ddot{a}$	`\spddot`	$\spddot$
`\dddot{a}`	$\dddot{a}$	`\spdddot`	$\spdddot$
`\ddddot{a}`	$\ddddot{a}$		
`\grave{a}`	$\grave{a}$		
`\hat{a}`	$\hat{a}$		
`\widehat{a}`	$\widehat{a}$	`\sphat`	$\sphat$
`\mathring{a}`	$\mathring{a}$		
`\tilde{a}`	$\tilde{a}$		
`\widetilde{a}`	$\widetilde{a}$	`\sptilde`	$\sptilde$
`\vec{a}`	$\vec{a}$		

Table 7.6: Math accents.

For other examples of the `\overline` command, see Section 7.8.2.

To use an arbitrary symbol as an accent or to create "underaccents", use Javier Bezos' `accents` package (see Section E.1 on how to obtain it).

7.8 Stretchable horizontal lines

LaTeX provides three types of stretchable horizontal lines that appear above or below a formula, braces, bars, and arrows. There are also stretchable arrow math symbols.

7.8.1 Horizontal braces

The `\overbrace` command places a brace of variable size above its argument, as in

$$\overbrace{a + b + \dots + z}$$

which is typed as

```
\[
   \overbrace{a + b + \dots + z}
\]
```

A superscript adds a label to the brace, as in

$$\overbrace{a + a + \dots + a}^{n}$$

which is typed as

```
\[
   \overbrace{a + a + \dots + a}^{n}
\]
```

The `\underbrace` command works similarly, placing a brace below its argument. A subscript adds a label to the brace, as in

$$\underbrace{a + a + \dots + a}_{n}$$

which is typed as

```
\[
   \underbrace{a + a + \dots + a}_{n}
\]
```

The following example combines these two commands:

$$\underbrace{\overbrace{a + \dots + a}^{(m-n)/2} + \underbrace{b + \dots + b}_{n} + \overbrace{a + \dots + a}^{(m-n)/2}}_{m}$$

This example is typed as

```
\[
   \underbrace{
      \overbrace{a + \dots + a}^{(m - n)/2}
      + \underbrace{b + \dots + b}_{n}
      + \overbrace{a + \dots + a}^{(m - n)/2}
    }_{m}
\]
```

7.8.2 Overlines and underlines

The `\overline` and `\underline` commands draw lines above or below a formula. For example,

$$\overline{\overline{X} \cup \overline{\overline{X}}} = \overline{\overline{X}}$$

is typed as

```
\[
   \overline{ \overline{X} \cup \overline{\overline{X}} }
      = \overline{ \overline{X} }
\]
```

Similarly, you can place arrows above and below an expression:

$$\overleftarrow{a} \quad \overrightarrow{aa}$$

$$\overleftrightarrow{aaa} \quad \underleftarrow{aaaa} \quad \underrightarrow{aaaaa} \quad \underleftrightarrow{aaaaaa}$$

which is typed as

```
\begin{gather*}
   \overleftarrow{a}         \quad \overrightarrow{aa}\\
   \overleftrightarrow{aaa} \quad \underleftarrow{aaaa}\quad
   \underrightarrow{aaaaa}  \quad \underleftrightarrow{aaaaaa}
\end{gather*}
```

7.8.3 Stretchable arrow math symbols

There are two stretchable arrow math symbols that extend to accommodate a formula above or below the arrows with the `\xleftarrow` and `\xrightarrow` commands. The formula on top is given as the argument (possibly empty) and the formula below is an optional argument.

$$A \xrightarrow{\text{1-1}} B \xleftarrow[\alpha\to\beta]{\text{onto}} C \xleftarrow[\gamma]{} D \leftarrow E$$

is typed as

```
\[
    A \xrightarrow{\text{1-1}} B \xleftarrow[\alpha\to\beta]
       {\text{onto}} C \xleftarrow[\gamma]{} D \xleftarrow{} E
\]
```

There are other stretchable arrow math symbols described in Section 9.8, but they can only be used in commutative diagrams.

7.9 Formula Gallery

In this section I present a collection of formulas—some simple, some complex—that illustrate the power of LaTeX.

Some of these examples require the `amssymb` package, so it is a good idea to include the line

```
\usepackage{amssymb,latexsym}
```

following the `\documentclass` line of any article.

Formula 1 A set-valued function

$$x \mapsto \{\, c \in C \mid c \leq x \,\}$$

```
\[
   x \mapsto \{\, c \in C \mid c \leq x \,\}
\]
```

To equalize the spacing around $c \in C$ and $c \leq x$, a thin space (`\,`) was added inside each brace (see Section 8.1). The same technique is used in several other formulas in this section.

Formula 2

$$\left| \bigcup (\, I_j \mid j \in J \,) \right| < \mathfrak{m}$$

```
\[
   \left| \bigcup (\, I_{j} \mid j \in J \,) \right|
    < \mathfrak{m}
\]
```

We use the delimiters `\left|` and `\right|` (see Section 7.5.1). The Fraktur `m` is introduced in Section 8.3.2.

Formula 3 Note that you have to add spacing both before and after the text fragment for some in the following example. The argument of `\text` is typeset in text mode, so spaces are recognized.

$$A = \{\, x \in X \mid x \in X_i, \text{ for some } i \in I \,\}$$

```
\[
   A = \{\, x \in X \mid x \in X_{i},
            \text{ for some $i \in I$} \,\}
\]
```

Formula 4 Space to show logical structure:

$$\langle a_1, a_2 \rangle \leq \langle a'_1, a'_2 \rangle \qquad \text{iff} \qquad a_1 < a'_1 \quad \text{or} \quad a_1 = a'_1 \text{ and } a_2 \leq a'_2$$

```
\[
   \langle a_{1}, a_{2} \rangle \leq
   \langle a'_{1}, a'_{2}\rangle \qquad \text{if{f}}
   \qquad a_{1} < a'_{1} \quad \text{or}
   \quad a_{1} = a'_{1} \text{ and } a_{2} \leq a'_{2}
\]
```

Note that in `if{f}` (in the argument of the first `\text`) the second `f` is enclosed in braces to avoid the use of the ligature—the merging of the two f's. For the proper way of typesetting iff without a ligature, see Section 5.4.6.

Formula 5 Here are some examples of Greek letters:

$$\Gamma_{u'} = \{\, \gamma \mid \gamma < 2\chi,\ B_\alpha \nsubseteq u',\ B_\gamma \subseteq u' \,\}$$

```
\[
   \Gamma_{u'} = \{\,\gamma \mid \gamma < 2\chi,\ B_{\alpha}
      \nsubseteq u', \ B_{\gamma} \subseteq u' \,\}
\]
```

See Section B.1 for a complete listing of Greek letters. We use the command `\␣` to properly space the formula. This command can be used both in text and in math.

Formula 6 `\mathbb` allows you to use the blackboard bold math alphabet, which only provides capital letters:

$$A = B^2 \times \mathbb{Z}$$

```
\[
   A = B^{2} \times \mathbb{Z}
\]
```

Formula 7 `\left[` and `\right]` provide stretched delimiters:

$$y^C \equiv z \vee \bigvee_{i \in C} \left[s_i^C \right] \pmod{\Phi}$$

```
\[
   y^C \equiv z \vee \bigvee_{ i \in C } \left[ s_{i}^{C}
     \right] \pmod{ \Phi }
\]
```

Notice how the superscript is set directly above the subscript in s_i^C.

Formula 8 A complicated congruence:

$$y \vee \bigvee(\, [B_\gamma] \mid \gamma \in \Gamma \,) \equiv z \vee \bigvee(\, [B_\gamma] \mid \gamma \in \Gamma \,) \pmod{\Phi^x}$$

```
\[
   y \vee \bigvee (\, [B_{\gamma}] \mid \gamma
    \in \Gamma \,) \equiv z \vee \bigvee (\, [B_{\gamma}]
    \mid \gamma \in \Gamma \,) \pmod{ \Phi^{x} }
\]
```

Formula 9 Use `\nolimits` to force the "limit" of the large operator to display as a subscript (see Section 7.6.4):

$$f(\mathbf{x}) = \bigvee\nolimits_{\!\mathfrak{m}} \Big(\bigwedge\nolimits_{\mathfrak{m}} (\, x_j \mid j \in I_i \,) \mid i < \aleph_\alpha \Big)$$

```
\[
   f(\mathbf{x}) =
        \bigvee\nolimits_{\!\mathfrak{m}}
        \left(\,
       \bigwedge\nolimits_{\mathfrak{m}}
        (\, x_{j} \mid j \in I_{i} \,)
        \mid i < \aleph_{\alpha}
        \,\right)
\]
```

Notice that a negative space (`\!`) was inserted to bring the $\mathfrak{m}$ a little closer to the big join symbol $\bigvee$.

Formula 10 The `\left.` command gives a blank left delimiter, which is needed to balance the `\right|` command:

$$\widehat{F}(x)\Big|_a^b = \widehat{F}(b) - \widehat{F}(a)$$

```
\[
   \left. \widehat{F}(x) \right|_{a}^{b}
    = \widehat{F}(b) - \widehat{F}(a)
\]
```

Formula 11 The `\underset` and `\overset` commands build new symbols (see Section 8.2.1):

$$u \underset{\alpha}{+} v \overset{1}{\sim} w \overset{2}{\sim} z$$

```
\[
   u \underset{\alpha}{+} v \overset{1}{\thicksim} w
    \overset{2}{\thicksim} z
\]
```

Note that the new symbols $\overset{1}{\sim}$ and $\overset{2}{\sim}$ are binary relations and $\underset{\alpha}{+}$ is a binary operation.

Formula 12 Small size bold **def**:

$$f(x) \overset{\mathbf{def}}{=} x^2 - 1$$

```
\[
   f(x) \overset{ \mathbf{def} }{ = } x^{2} - 1
\]
```

Formula 13 Math accents run amok:

$$\overbrace{a^\vee + b^\vee + \cdots + z^\vee}^{\breve{\breve{n}}}$$

```
\[
   \overbrace{a\spcheck + b\spcheck + \dots + z\spcheck}^
   {\breve{\breve{n}}}
\]
```

Recall that for the `\sp` commands you need the `amsxtra` package.

Formula 14

$$\begin{vmatrix} a+b+c & uv \\ a+b & c+d \end{vmatrix} = 7$$

```
\[
   \begin{vmatrix}
     a + b + c & uv\\
     a + b & c + d
   \end{vmatrix}
   = 7
\]
```

$$\begin{Vmatrix} a+b+c & uv \\ a+b & c+d \end{Vmatrix} = 7$$

```
\[
   \begin{Vmatrix}
     a + b + c & uv\\
     a + b & c + d
   \end{Vmatrix}
   = 7
\]
```

Formula 15

$$\boldsymbol{\alpha}^2 \sum_{j\in\mathbf{N}} b_{ij}\hat{y}_j = \sum_{j\in\mathbf{N}} b_{ij}^{(\lambda)}\hat{y}_j + (b_{ii} - \lambda_i)\hat{y}_i\hat{y}$$

```
\[
   \boldsymbol{\alpha}^2\sum_{j \in \mathbf{N}} b_{ij}
    \hat{y}_{j} = \sum_{j \in \mathbf{N}}
    b^{(\lambda)}_{ij}\hat{y}_{j}
    + (b_{ii} - \lambda_{i}) \hat{y}_{i} \hat{y}
\]
```

`\mathbf{N}` makes a bold $\mathbf{N}$ and `\boldsymbol{\alpha}` produces a bold $\boldsymbol{\alpha}$ (see Section 8.3.2).

Formula 16 To produce the formula

$$\left(\prod_{j=1}^{n} \hat{x}_j\right) H_c = \frac{1}{2}\hat{k}_{ij} \det \widehat{\mathbf{K}}(i|i)$$

try typing

```
\[
   \left( \prod^n_{\, j = 1} \hat{ x }_{j} \right) H_{c}=
   \frac{1}{2} \hat{k}_{ij} \det \hat{ \mathbf{K} }(i|i)
\]
```

which typesets as

$$\left(\prod_{j=1}^{n} \hat{x}_j\right) H_c = \frac{1}{2}\hat{k}_{ij} \det \hat{\mathbf{K}}(i|i)$$

This is not quite right. You can correct the overly large parentheses by using the `\biggl` and `\biggr` commands in place of `\left(` and `\right)`, respectively (see Section 7.5.2). Adjust the small hat over $\mathbf{K}$ by using `\widehat`:

```
\[
   \biggl( \prod^n_{\, j = 1} \hat{ x }_{j} \biggr)
   H_{c} = \frac{1}{2}\hat{ k }_{ij}
   \det \widehat{ \mathbf{K} }(i|i)
\]
```

which gives you the desired formula.

Formula 17 In this formula, I have used `\overline{I}` to get $\overline{I}$. You could, instead, use `\bar{I}`, which is typeset as $\bar{I}$.

$$\det \mathbf{K}(t = 1, t_1, \ldots, t_n) = \sum_{I \in \mathbf{n}} (-1)^{|I|} \prod_{i \in I} t_i \prod_{j \in I} (D_j + \lambda_j t_j) \det \mathbf{A}^{(\lambda)}(\,\overline{I}|\overline{I}\,) = 0$$

```
\[
  \det \mathbf{K} (t = 1, t_{1}, \dots, t_{n}) =
  \sum_{I \in \mathbf{n} }(-1)^{|I|} \prod_{i \in I}t_{i}
  \prod_{j \in I} (D_{j} + \lambda_{j} t_{j})
  \det \mathbf{A}^{(\lambda)}
  (\,\overline{I} | \overline{I}\,) = 0
\]
```

Formula 18 The command `\|` provides the $\|$ math symbol in this formula:

$$\lim_{(v,v')\to(0,0)} \frac{H(z+v) - H(z+v') - BH(z)(v-v')}{\|v - v'\|} = 0$$

```
\[
   \lim_{(v, v') \to (0, 0)}
    \frac{H(z + v) - H(z + v') - BH(z)(v - v')}
         {\| v - v' \|} = 0
\]
```

Formula 19 This formula uses the calligraphic math alphabet (see Section 8.3.2):

$$\int_{\mathcal{D}} |\overline{\partial u}|^2 \Phi_0(z) e^{\alpha|z|^2} \geq c_4\alpha \int_{\mathcal{D}} |u|^2 \Phi_0 e^{\alpha|z|^2} + c_5\delta^{-2} \int_A |u|^2 \Phi_0 e^{\alpha|z|^2}$$

```
\[
   \int_{\mathcal{D}} | \overline{\partial u} |^{2}
    \Phi_{0}(z) e^{\alpha |z|^2}
    \geq c_{4} \alpha \int_{\mathcal{D}} |u|^{2}\Phi_{0}
    e^{\alpha |z|^{2}}
    + c_{5} \delta^{-2} \int_{A} |u|^{2}
    \Phi_{0} e^{\alpha |z|^{2}}
\]
```

Formula 20 The `\hdotsfor` command sets dots that span multiple columns in a matrix. The `\dfrac` command is the displayed variant of the `\frac` command (see Section 7.4.1), used here because the matrix entries with `\frac` would look too small.

$$\mathbf{A} = \begin{pmatrix} \dfrac{\varphi \cdot X_{n,1}}{\varphi_1 \times \varepsilon_1} & (x + \varepsilon_2)^2 & \cdots & (x + \varepsilon_{n-1})^{n-1} & (x + \varepsilon_n)^n \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_2 \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_2 \times \varepsilon_2} & \cdots & (x + \varepsilon_{n-1})^{n-1} & (x + \varepsilon_n)^n \\ \hdotsfor{5} \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_n \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_n \times \varepsilon_2} & \cdots & \dfrac{\varphi \cdot X_{n,n-1}}{\varphi_n \times \varepsilon_{n-1}} & \dfrac{\varphi \cdot X_{n,n}}{\varphi_n \times \varepsilon_n} \end{pmatrix} + \mathbf{I}_n$$

```
\[
   \mathbf{A} =
   \begin{pmatrix}
     \dfrac{\varphi \cdot X_{n, 1}} {\varphi_{1} \times
       \varepsilon_{1}} & (x + \varepsilon_{2})^{2}
     & \cdots & (x + \varepsilon_{n - 1})^{n - 1}
     & (x + \varepsilon_{n})^{n}\\[10pt]
     \dfrac{\varphi \cdot X_{n, 1}} {\varphi_{2} \times
       \varepsilon_{1}} & \dfrac{\varphi \cdot X_{n, 2}}
       {\varphi_{2} \times \varepsilon_{2}} & \cdots &
       (x + \varepsilon_{n - 1})^{n - 1}
       & (x + \varepsilon_{n})^{n}\\
     \hdotsfor{5}\\
     \dfrac{\varphi \cdot X_{n, 1}} {\varphi_{n} \times
       \varepsilon_{1}} & \dfrac{\varphi \cdot X_{n, 2}}
       {\varphi_{n} \times \varepsilon_{2}} & \cdots
       & \dfrac{\varphi \cdot X_{n, n - 1}} {\varphi_{n}
       \times \varepsilon_{n - 1}} &
       \dfrac{\varphi\cdot X_{n, n}}
             {\varphi_{n} \times \varepsilon_{n}}
   \end{pmatrix}
    + \mathbf{I}_{n}
\]
```

Recall the discussion of `\dots` vs. `\cdots` and `\ldots` in Section 7.4.3. In this formula, we have to use `\cdots`. Matrices are discussed in detail in Section 9.7.1.

Note the use of the command `\\[10pt]`. If you use `\\` instead, the first and second lines of the matrix are set too close.

I show you in Section 15.1.2 how to rewrite the formula to make it shorter and more readable.

CHAPTER

8

More math

In the previous chapter, we discuss the basic building blocks of a formula and how to put them together to form more complex formulas. This chapter starts out by going one step lower, to the characters that make up a formula. We discuss math symbols and math alphabets.

LaTeX was designed for typesetting math, so it is not surprising that it contains a very large number of math symbols. Section 8.1 classifies and describes them. Section 8.2 discusses how to build new symbols from existing ones. Math alphabets and symbols are discussed in Section 8.3. Horizontal spacing commands in math are described in Section 8.4.

LaTeX provides a variety of ways to number and tag equations. These techniques are described in Section 8.5. We conclude the chapter with two minor topics: generalized fractions (Section 8.6.1) and boxed formulas (Section 8.6.2).

8.1 Spacing of symbols

LaTeX provides a large variety of math symbols: Greek characters (α), binary operations ($\circ$), binary relations ($\leq$), negated binary relations ($\not\leq$), arrows ($\nearrow$), delimiters ($\{$), and so on. All the math symbols provided by LaTeX are listed in the tables of

Appendix B.

Consider the formula

$$A = \{\, x \in X \mid x\beta \geq xy > (x+1)^2 - \alpha \,\}$$

which is typed as

```
\[
   A = \{\, x \in X \mid x \beta \geq x y
     > (x + 1)^{2} - \alpha \,\}
\]
```

The spacing of the symbols in the formula varies. In $x\beta$, the two symbols are very close. In $x \in X$, there is some space around the $\in$, and in $x + 1$, there is somewhat less space around the $+$. There is a little space after $\{$ and before $\}$—not quite enough for this formula, which is why the thinspace commands (`\,`) were added.

8.1.1 Classification

LaTeX classifies symbols into several categories or *types* and spaces them accordingly. In the formula

$$A = \{\, x \in X \mid x\beta \geq xy > (x+1)^2 - \alpha \,\}$$

we find

- Ordinary math symbols: A, x, X, β, and so on
- Binary relations: $=$, $\in$, $\mid$, $\geq$, and $>$
- Binary operations: $+$ and $-$
- Delimiters: $\{$, $\}$, $($, and $)$

As a rule, you do not have to be concerned with whether or not a given symbol in a formula, say $\times$, is a binary operation. LaTeX spaces the typeset symbol correctly.

8.1.2 Three exceptions

There are three symbols with more than one classification: $+$, $-$, and $\mid$.

$+$ or $-$ could be either a binary operation, for instance, $a - b$, or a sign, for instance, $-b$.

Rule ■ $+$ and $-$

$+$ or $-$ are binary operations when preceded and followed by a symbol or an empty group (`{}`).

So, for instance, in

$$\begin{aligned}(A+BC)x+ \qquad & Cy = 0,\\ Ex+(F+G)y &= 23.\end{aligned}$$

which is typed as (see the `alignat*` environment in Section 9.5.4)

```
\begin{alignat*}{2}
   (A + B C)x &{}+{} &C       &y = 0,\\
           Ex &{}+{} &(F + G)&y = 23.
\end{alignat*}
```

we use the empty groups, `{}`, to tell LaTeX that the second + in line 1 and the first + in line 2 of the formula are binary operations. If we leave out the empty groups, and type instead

```
\begin{alignat*}{2}
   (A + B C)x &+ &C       &y = 0,\\
           Ex &+ &(F + G)&y = 23.
\end{alignat*}
```

we get

$$\begin{aligned}(A+BC)x+ \qquad & Cy = 0,\\ Ex+(F+G)y &= 23.\end{aligned}$$

Another illustration is given later in this section using the `\phantom` command.

This problem often arises in split formulas, for example if the formula is split just before a $+$ or $-$, you should start the next line with `{}+` or `{}-`. See Section 9.3 for examples.

The | symbol can play several different roles in a math formula, so LaTeX provides separate commands to specify the symbol's meaning.

Rule ■ The four roles of the | symbol

- `|` ordinary math symbol
- `\mid` binary relation
- `\left|` left delimiter
- `\right|` right delimiter

Note the differences between the spacing in $a|b$, typed as `$a | b$`, and in $a \mid b$, typed as `$a \mid b$`.

Name	Width	Short	Long
1 mu (math unit)	ı		`\mspace{1mu}`
thinspace	ıı	`\,`	`\thinspace`
medspace	ıı	`\:`	`\medspace`
thickspace	ıı	`\;`	`\thickspace`
interword space	␣	`\␣`	
1 em	⌴		`\quad`
2 em	⌴⌴		`\qquad`
Negative space			
1 mu	ı		`\mspace{-1mu}`
thinspace	ıı	`\!`	`\negthinspace`
medspace	ıı		`\negmedspace`
thickspace	ıı		`\negthickspace`

Table 8.1: Math spacing commands.

8.1.3 Spacing commands

There are some situations where LaTeX cannot typeset a formula properly and you have to add spacing commands. Luckily, LaTeX provides a variety of spacing commands, listed in Table 8.1. The `\neg` commands remove space by "reversing the print head".

The `\quad` and `\qquad` commands are often used to adjust aligned formulas (see Chapter 9) or to add space before text in a math formula. The size of `\quad` (= 1 em) and `\qquad` (= 2 em) depends on the current font.

The `\,` and `\!` commands are the most useful for fine tuning math formulas, see some examples in the *Formula Gallery* and in the next section. The `\mspace` command and the math unit *mu* provides you with even finer control. 18 mu = 1 em, defined in Section 5.8.3. For example, `\mspace{3mu}` adds a space that is 1/6 em long. There is an interesting use of mu on page 109.

8.1.4 Examples

The *Formula Gallery* in Section 7.9 starts out with an example that shows the importance of fine tuning. In set notation, when using `\mid` for "such that", thin spaces are inserted just inside the braces. Some more examples of fine tuning follow. One more example can be found in Section 8.2.1.

Example 1 In Section 3.3, we type the formula $\int_0^{\pi} \sin x \, dx = 2$ as

```
$\int_{0}^{\pi} \sin x \, dx = 2$
```

Notice the thinspace spacing command `\,` between `\sin x` and `dx`. Without the command, LaTeX would have crowded $\sin x$ and dx: $\int_0^{\pi} \sin x dx = 2$.

Example 2 $|-f(x)|$, typed as `$|-f(x)|$`, is spaced incorrectly. $-$ becomes a binary operation by the $+$ and $-$ rule. To get the correct spacing, as in $|-f(x)|$, type `$\left|-f(x)\right|$`. This form tells LaTeX that the first $|$ is a left delimiter, by the $|$ rule, and therefore $-$ is the unary minus sign, not the binary subtraction operation.

Example 3 In $\sqrt{5}\text{side}$, typed as

```
$\sqrt{5} \text{side}$
```

$\sqrt{5}$ is too close to side. So type it as

```
$\sqrt{5} \, \text{side}$
```

which typesets as $\sqrt{5}\,\text{side}$.

Example 4 In $\sin x/\log n$, the division symbol $/$ is too far from $\log n$, so type

```
$\sin x / \! \log n$
```

which prints $\sin x/\log n$.

Example 5 In $f(1/\sqrt{n})$, typed as

```
$f(1 / \sqrt{n})$
```

the square root almost touches the closing parenthesis. To correct it, type

```
$f(1 / \sqrt{n}\,)$
```

which typesets as $f(1/\sqrt{n}\,)$.

There is one more symbol with special spacing: the `\colon` command, used for formulas such as $f\colon A \to B$ (typed as `$f \colon A \to B$`). Observe that `$f: A \to B$` typesets as $f : A \to B$. The spacing is awful.

See Section 8.2.3 on how to declare the type of a symbol.

8.1.5 *The* `phantom` *command*

The `\phantom{`*argument*`}` command (introduced for text in Section 5.8.1) produces a space in a formula equivalent to the space that would be occupied by its typeset argument. This command is one of the most powerful tools available to us for fine tuning alignments. Here are two simple illustrations:

$$A = \begin{pmatrix} 1 & 3 & 1 \\ 2 & 1 & 1 \\ -2 & 2 & -1 \end{pmatrix}$$

typed as

```
\[
   A = \begin{pmatrix}
          \phantom{-}1 & \phantom{-}3 & \phantom{-}1\\
          \phantom{-}2 & \phantom{-}1 & \phantom{-}1\\
                    -2 & \phantom{-}2 &           -1\\
       \end{pmatrix}
\]
```

and

$$\begin{pmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{pmatrix}$$

typed as

```
\begin{pmatrix}
     1 & 3 & 1\\
     2 & 1 & 1\\
    -2 & 2 & -1
\end{pmatrix}
```

$$\begin{pmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{pmatrix}$$

and

$$\begin{vmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{vmatrix}$$

typed as

```
\begin{vmatrix}
     1 & 3 & 1\\
     2 & 1 & 1\\
    -2 & 2 & -1
\end{vmatrix}
```

$$\begin{vmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{vmatrix}$$

and

$$\begin{Vmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{Vmatrix}$$

typed as

```
\begin{Vmatrix}
     1 & 3 & 1\\
     2 & 1 & 1\\
    -2 & 2 & -1
\end{Vmatrix}
```

$$\begin{Vmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{Vmatrix}$$

and

$$\begin{Bmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{Bmatrix}$$

typed as

```
\begin{Bmatrix}
     1 & 3 & 1\\
     2 & 1 & 1\\
    -2 & 2 & -1
\end{Bmatrix}
```

$$\begin{Bmatrix} 1 & 3 & 1\\ 2 & 1 & 1\\ -2 & 2 & -1 \end{B

```
\[
   \overset{\alpha}{a}                \qquad
   \underset{\boldsymbol{\cdot}}{X}   \qquad
   \overset{\alpha}{ a_{i} }          \qquad
   \overset{\alpha}{a}_{i}
\]
```

For the `\boldsymbol` command, see Section 8.3.3. Note that in the third example, $\overset{\alpha}{a_i}$, the α seems to be sitting too far to the right but the fourth example corrects that.

You can also use these commands with binary relations, as in

$$f(x) \overset{\text{def}}{=} x^2 - 1$$

which is typed as

```
\[
   f(x) \overset{ \text{def} }{=} x^{2} - 1
\]
```

Since $=$ is a binary relation, $\overset{\text{def}}{=}$ becomes a binary relation, as shown by the spacing on either side. Here is another example,

$$\frac{a}{b} \overset{u}{+} \frac{c}{d} \overset{l}{+} \frac{e}{f}$$

which is typed as

```
\[
   \frac{a}{b} \overset{u}{+} \frac{c}{d}
    \overset{l}{+} \frac{e}{f}
\]
```

Note that $\overset{u}{+}$ and $\overset{l}{+}$ are properly spaced as binary operations.

As we discuss in Section 7.4.6, the safer definitions for these examples are

```
\[
   f(x) \overset{ \normalfont\text{def} }{=} x^{2} - 1
\]
```

and

```
\[
   \frac{a}{b} \overset{\normalfont u}{+} \frac{c}{d}
    \overset{\normalfont l}{+} \frac{e}{f}
\]
```

8.2.2 Negating and side-setting symbols

You can *negate* with the `\not` command; for instance, $a \notin b$ and $a \neq b$ are typed as `$a \not\in b$` and `$a \not= b$`, respectively. It is preferable, however, to use the negated symbols $\notin$, typed as `$\notin$`, and $\neq$, typed as `$\ne$`. See the negated binary relations table in Section B.2. For instance, "a does not divide b", $a \nmid b$, should be typed as `$a \nmid b$`, not as `$a \not\mid b$`, which typesets as $a \not| b$. In Section 8.2.3, you learn how to improve $a \not| b$ to $a \nmid b$, typed as `$a \mathrel{\not|} b$`. However, `$a \nmid b$` is still best.

LaTeX provides the `\sideset` command to set symbols at the corners of large operators other than the "corners" (the last four delimiters in Table 7.1). This command takes three arguments:

```
\sideset{ _{ll}^{ul} }{ _{lr}^{ur} }{large_op}
```

where *ll* stands for the symbol to be placed at the lower left, *ul* for upper left, *lr* for lower right, and *ur* for upper right; *large_op* is a large operator. These two examples,

$$\prod_a^c \text{ and } {}^e\prod$$

are typed as

```
\[
  \sideset{}{_{a}^{c}}{\prod}\text{ and } \sideset{^{e}}{}{\prod}
\]
```

Note that the two first arguments are compulsory, although one or the other may be empty, while the third argument must contain the large operator.

Here is a more meaningful example:

```
\[
   \sideset{}{'}{\sum}_{\substack{ i < 10\\ j < 10 } } x_{i}z_{j}
\]
```

is typeset as

$$\sum_{\substack{i<10\\ j<10}}{}' x_i z_j$$

In this example, note that prime ($'$) is an automatically superscripted symbol (see Section 7.4.1), so you do not have to type `^'` in the second argument. Typing `\sum'` would not work, since LaTeX would place the prime above the sum symbol.

Thus, `\sideset` helps in mixing sub- and superscripts in "limit" positions with others in "nolimit" positions, allowing for a total of six positions in displayed operators with limits. Try

$$\prod_{a\ n}^{c\ r} {}_{e}^{i}$$

typed as

```
\[
   \sideset{_{a}^{c}}{_{e}^{i}}{\prod}_{n}^{r}
\]
```

8.2.3 Changing the type of a symbol

Some symbols are binary relations and some are binary operations (see Section 8.1). In fact, you can force any symbol to behave like either type.

The `\mathbin` command declares its argument to be a binary operation. For example,

```
\mathbin{\alpha}
```

makes this instance of `\alpha` behave like a binary operation, as in $a \mathbin{\alpha} b$, typed as

```
$a \mathbin{\alpha} b$
```

You can use the `\mathrel` command to make a symbol behave like a binary relation, as in the formula $a \mathrel{\alpha} b$, typed as

```
$a \mathrel{ \alpha } b$
```

You can see
$a \mathbin{\alpha} b$ (`$a \mathbin{\alpha} b$`)
$a \mathrel{\alpha} b$ (`$a \mathrel{\alpha} b$`)
that a binary relation provides a bit more space than a binary operation. There is an interesting use of `\mathbin` on page 109.

In Section 7.6.2, we discussed the `\DeclareMathOperator` command and its `*`-ed version, to declare a symbol—or any text or formula—a math operator.

8.3 Math alphabets and symbols

The classification of math symbols in the context of spacing was discussed in Section 8.1. The symbols in a formula can also be classified as *characters from math alphabets* and *math symbols.* In the formula

$$A = \{x \in X \mid x\beta \geq xy > (x+1)^2 - \alpha\}$$

the following characters come from math alphabets:

$$A \quad x \quad X \quad y \quad 1 \quad 2$$

whereas these characters are math symbols:

$$= \quad \{ \quad \in \quad | \quad \beta \quad \geq \quad > \quad (\quad + \quad) \quad - \quad \alpha \quad \}$$

8.3.1 Math alphabets

The letters and digits typed in a math formula come from *math alphabets.* LaTeX's default math alphabet—the one you get if you do not ask for something else—is Computer Modern math italic for *letters.* In the formula $x^2 \vee y_3 = \alpha$, the characters x and y come from this math alphabet. The default math alphabet for *digits* is Computer Modern roman and the digits 2 and 3 in this formula are typeset in Computer Modern roman.

LaTeX has a number of commands to switch type style in math. The two most important commands select the bold and italic versions:

Command	Math alphabet	Produces
`\mathbf{a}`	math bold	$\mathbf{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$
`\mathit{a}`	math italic	$\mathit{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$

These commands change the style of letters, numbers, and upper case Greek characters.

But beware of the pitfalls. For instance, in `\mathit{left-side}` the hyphen typesets as a minus: $\mathit{left-side}$.

There are four more commands that switch math alphabets:

Command	Math Alphabet	Produces
`\mathsf{a}`	math sans serif	$\mathsf{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$
`\mathrm{a}`	math roman	$\mathrm{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$
`\mathtt{a}`	math typewriter	$\mathtt{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$
`\mathnormal{a}`	math italic	$\mathnormal{2\ Greek\ gammas,\ \gamma\ and\ \Gamma}$

Math roman is used in formulas for operator names, such as $\sin$ in $\sin x$, and for text. For operator names, you should use the `\DeclareMathOperator` command or the `*`-ed version, which sets the name of the operator in math roman, and also provides the proper spacing (see Section 8.2.3). For text, you should use the `\text` command (see Section 7.4.6).

The `\mathnormal` command switches to the default math alphabet, but this command is seldom used in practice.

The Computer Modern fonts include a math bold italic alphabet, but LaTeX does not provide a command to access it.

Rule ■ Math alphabets vs. text alphabets

Do not use text alphabets in a math formula, except in the argument of a `\text` command.

It may not be easy for you to see the difference, but some things will not look right or may not align properly.

8.3.2 Math symbol alphabets

You may have noticed that α was not classified as belonging to an alphabet in the example at the beginning of this section. Indeed, α is treated by LaTeX as a math symbol rather than as a member of a math alphabet. You cannot italicize or slant it, nor is there a sans serif version. There is a bold version, but you must use the `\boldsymbol` command to produce it. For instance, $\boldsymbol{\alpha}_{\boldsymbol{\beta}}$, is typed as

```
$\boldsymbol{\alpha}_{\boldsymbol{\beta}}$
```

Note that $\boldsymbol{\beta}$ appears in a small size in $\boldsymbol{\alpha}_{\boldsymbol{\beta}}$.

Four "alphabets of symbols" are built into LaTeX.

Greek The examples α, β, and Γ are typed as

```
$\alpha$, $\beta$, $\Gamma$
```

See Section B.1 for the symbol table.

Calligraphic an uppercase-only alphabet invoked with the `\mathcal` command. The examples $\mathcal{A}$, $\mathcal{C}$, and $\mathcal{E}$ are typed as

```
$\mathcal{A}$, $\mathcal{C}$, $\mathcal{E}$
```

Euler Fraktur invoked by the `\mathfrak` command. The examples $\mathfrak{n}$, $\mathfrak{p}$, $\mathfrak{N}$, and $\mathfrak{P}$ are typed as

```
$\mathfrak{n}$, $\mathfrak{p}$, $\mathfrak{N}$,
$\mathfrak{P}$
```

Blackboard bold uppercase-only math alphabet, invoked with `\mathbb`. The examples $\mathbb{A}$, $\mathbb{B}$, $\mathbb{C}$ are typed as

```
$\mathbb{A}$, $\mathbb{B}$, $\mathbb{C}$
```

8.3.3 Bold math symbols

In math, most characteristics of a font are specified by LaTeX. One exception is boldface. To make a *letter* from a math alphabet within a formula bold, use the `\mathbf` command. For instance, in

we choose the vector $\mathbf{v}$

$\mathbf{v}$ is produced by `$\mathbf{v}$`.

To obtain bold math *symbols,* use the `\boldsymbol` command. For example, the bold symbols

$$\boldsymbol{5} \quad \boldsymbol{\alpha} \quad \boldsymbol{\Lambda} \quad \boldsymbol{\mathcal{A}} \quad \boldsymbol{\to} \quad \boldsymbol{A}$$

are typed as

```
\[
  \boldsymbol{5}             \quad \boldsymbol{\alpha}
  \quad \boldsymbol{\Lambda}\quad\boldsymbol{\mathcal{A}}
  \quad \boldsymbol{\to}     \quad \boldsymbol{A}
\]
```

Note that `\boldsymbol{A}` typesets as $\boldsymbol{A}$, a bold math italic A. To get an upright $\mathbf{A}$, type `$\mathbf{A}$`.

5 did not really need `\boldsymbol`; `\mathbf{5}` gives the same result.

To make an entire formula bold, use the `\mathversion{bold}` command, as in

```
{\mathversion{bold} $a \equiv c \pod{\theta}$}
```

which typesets as $\boldsymbol{a \equiv c \pod{\theta}}$. Note that the `\mathversion{bold}` command is given *before the formula.*

To typeset $\boldsymbol{\mathcal{AMS}}$, type

```
$\boldsymbol{ \mathcal{A} } \boldsymbol{ \mathcal{M} }
   \boldsymbol{ \mathcal{S} }$
```

or

```
$\boldsymbol{ \mathcal{AMS} }$
```

or

```
{\mathversion{bold} $\mathcal{AMS}$}
```

Within the scope of `\mathversion{bold}`, you can undo its effect with

```
\mathversion{normal}
```

Not all symbols have bold variants. For example, if you type

```
$\sum \quad \boldsymbol{\sum}$
```

you get $\sum \quad \sum$, two identical symbols. If you want to obtain a bold version, use the *poor man's bold* invoked by the `\pmb` command. This command typesets the symbol three times very close to one another producing a bold symbol of some quality. Note that `\pmb` does destroy the type of the symbol, `\pmb{\sum}` is no longer spaced like a large operator. To make it into a large operator, declare in the preamble

```
\DeclareMathOperator{\boldsum}{\pmb{\sum}}
```

and

```
\DeclareMathOperator*{\boldsumlim}{\pmb{\sum}}
```

Compare the following four variants of sum:

$$\sum_{i=1}^{n} i^2 \quad \sum_{i=1}^{n} i^2 \quad \sum_{i=1}^{n} i^2 \quad \sum_{i=1}^{n} i^2$$

The first sum is typed (in displayed math mode) as

```
\sum_{i = 1}^{n} i^{2}
```

The second uses poor man's bold, but does not declare the result to be a large operator:

```
\pmb{\sum}_{i = 1}^{n} i^{2}
```

The third uses the math operator declared:

```
\boldsum_{i = 1}^{n} i^{2}
```

The fourth uses the math operator with limit declared:

```
\boldsumlim_{i = 1}^{n} i^{2}
```

8.3.4 Size changes

There are four math font sizes, invoked by the command declarations

- `\displaystyle`, normal size for displayed formulas
- `\textstyle`, normal size for inline formulas
- `\scriptstyle`, normal size for subscripted and superscripted symbols
- `\scriptscriptstyle`, normal size for doubly subscripted and superscripted symbols

These commands control a number of style parameters in addition to the size. Compare the two fractions

$$\frac{1}{2+\dfrac{1}{3}} \quad \frac{1}{2+\frac{1}{3}}$$

which are typed as

```
\[
    \frac{1}{\displaystyle 2 + \frac{1}{3}} \quad
       \frac{1}{ 2 + \frac{1}{3} }
\]
```

8.3.5 Continued fractions

In addition to the `\frac`, `\dfrac`, and `\tfrac` commands (see Section 7.4.1), LaTeX makes typesetting continued fractions even easier by providing the `\cfrac` command. The `\cfrac` command takes an optional argument, `l` or `r`, to place the numerator on the left or on the right. For example,

$$\cfrac{1}{2+\cfrac{1}{3+\cdots}} \qquad \cfrac[l]{1}{2+\cfrac[l]{1}{3+\cdots}}$$

is typed as

```
\[
   \cfrac{1}{ 2 + \cfrac{1}{3 + \cdots} } \qquad
       \cfrac[l]{1}{2 + \cfrac[l]{1}{3 + \cdots}}
\]
```

8.4 Vertical spacing

As a rule, all horizontal and vertical spacing in a math formula is done by LaTeX. Nevertheless, you often need to adjust horizontal spacing (see Section 8.1). There is seldom a need to adjust vertical spacing, but there are a few exceptions.

The formula $\sqrt{a} + \sqrt{b}$ does not look quite right, because the square roots are not uniform. You can correct this with `\mathstrut` commands, which inserts an invisible vertical space:

```
$\sqrt{\mathstrut a} + \sqrt{\mathstrut b}$
```

typesets as $\sqrt{a} + \sqrt{b}$. See Section 5.9.5 for struts in general.

Another way to handle this situation is with the `\vphantom` (vertical phantom) command, which measures the height of its argument and places a math strut of that height into the formula. So

```
$\sqrt{\vphantom{b} a} + \sqrt{b}$
```

also prints uniform square roots, $\sqrt{a} + \sqrt{b}$. The `\vphantom` method is more versatile than the previous one.

Here is a more complicated example from a recent research article:

$$\Theta_i = \bigcup \big(\Theta(\, \overline{a \wedge b}, \overline{a} \wedge \overline{b}) \mid a,\ b \in B_i \,\big) \vee \bigcup \big(\Theta(\, \overline{a \vee b}, \overline{a} \vee \overline{b}\,) \mid a,\ b \in B_i \,\big),$$

typed as

```
\[
   \Theta_i = \bigcup \big(\, \Theta (\,\overline{a
```

```
      \wedge b},\overline{\vphantom{b}a} \wedge
       \overline{b}) \mid a,\ b \in B_i \,\big)
      \vee \bigcup \big(\, \Theta(\,\overline{a \vee b},
      \overline{\vphantom{b}a} \vee \overline{b} \,)
        \mid a,\ b \in B_i \,\big),
\]
```

Another useful command for vertical spacing is the `\smash` command. It directs LaTeX to pretend that its argument does not protrude above or below the line in which it is typeset.

For instance, the two lines of this admonition:

It is *very important* that you memorize the integral $\frac{1}{\int f(x)\,dx} = 2g(x) + C$, which will appear on the next test.

are too far apart because LaTeX had to make room for the fraction. However, in this instance, the extra vertical space is not necessary because the second line is very short. To correct this, place the formula in the argument of a `\smash` command:

```
It is \emph{very important} that you memorize the
integral $\smash{\frac{1}{\int f(x) \, dx}} = 2g(x) + C$,
which will appear on the next test.
```

LaTeX produces the following:

It is *very important* that you memorize the integral $\frac{1}{\int f(x)\,dx} = 2g(x) + C$, which will appear on the next test.

An optional argument to the `\smash` command controls which part of the formula is ignored, `t` to smash the top, and `b` to smash the bottom.

8.5 Tagging and grouping

You can attach a name to an equation using the `\tag` command. In the `equation` or `equation*` environments,

`\tag{`*name*`}`

attaches the tag *name* to the equation—*name* is typeset as text. The tag replaces the number.

Recall that the numbering of an equation is *relative,* that is, the number assigned to an equation is relative to the placement of the equation with respect to other equations in the document. An equation tag, on the other hand, is *absolute*—the tag remains the same even if the equation is moved.

If you want to reference the number generated by LaTeX for an equation, then you have to attach a `\label{`*name*`}` command. You reference the number with the `\ref{`*name*`}` or `\eqref{`*name*`}` command.

Note that an equation may contain both a tag and a label. The tag is typeset and the label can be used for page referencing with the `\pageref` command (see Section 10.4.2).

If there is a tag, the `equation` and the `equation*` environments are equivalent. For example,

(Int) $$\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$$

may be typed as

```
\begin{equation*}
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx
   = \sqrt{\pi}\tag{Int}
\end{equation*}
```

or

```
\begin{equation}
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx
   = \sqrt{\pi}\tag{Int}
\end{equation}
```

or

```
\[
   \int_{-\infty}^{\infty} e^{-x^{2}} \, dx
   = \sqrt{\pi}\tag{Int}
\]
```

Note that `\label` works in a starred display math environment if a tag is present.

The `\tag*` command is the same as `\tag` except that it does not automatically enclose the tag in parentheses. To get

A–B $$\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}$$

type

```
\begin{equation}
  \int_{-\infty}^{\infty} e^{-x^{2}} \, dx = \sqrt{\pi}
   \tag*{A--B}
\end{equation}
```

Tagging allows numbered variants of equations. For instance, the equation

$$A^{[2]} \diamond B^{[2]} \cong (A \diamond B)^{[2]} \tag{1}$$

may need a variant:

$$A^{\langle 2\rangle} \diamond B^{\langle 2\rangle} \equiv (A \diamond B)^{\langle 2\rangle} \tag{1′}$$

If the label of the first equation is `E:first`, then the second equation may be typed as follows:

```
\begin{equation}\tag{\ref{E:first}$'$}
   A^{\langle 2 \rangle} \diamond B^{\langle 2\rangle}
   \equiv (A \diamond B)^{\langle 2 \rangle}
\end{equation}
```

Such a tag is absolute in the sense that it does not change if the equation is moved. But if it references a label and the number generated by LaTeX for the label changes, the tag changes.

In contrast, *grouping* applies to a group of *adjacent* equations. Suppose the last equation was numbered (1) and the next group of equations is to be referred to as (2), with individual equations numbered as (2a), (2b), and so on. Enclosing these equations in a `subequations` environment accomplishes this goal. For instance,

$$A^{[2]} \diamond B^{[2]} \cong (A \diamond B)^{[2]} \tag{1a}$$

and its variant

$$A^{\langle 2\rangle} \diamond B^{\langle 2\rangle} \equiv (A \diamond B)^{\langle 2\rangle} \tag{1b}$$

are typed as

```
\begin{subequations}\label{E:joint}
   \begin{equation}\label{E:original}
      A^{[2]} \diamond B^{[2]} \cong (A \diamond B)^{[2]}
   \end{equation}

   \begin{equation}\label{E:modified}
      A^{\langle 2 \rangle} \diamond B^{\langle 2\rangle}
      \equiv (A \diamond B)^{\langle 2\rangle}
   \end{equation}
\end{subequations}
```

Referring to these equations, you find that

- `\eqref{E:joint}` resolves to (1)
- `\eqref{E:original}` resolves to (1a)

- `\eqref{E:modified}` resolves to (1b)

Note that in this example, references to the second and third labels produce numbers, (1a) and (1b), that also appear in the typeset version. The group label, `E:joint`, references the entire group, but (1) does not appear in the typeset version unless referenced.

A `subequations` environment can contain the multiline math constructs discussed in Chapter 9 (see Section 9.4.4).

8.6 Miscellaneous

8.6.1 Generalized fractions

The generalized fraction command provides the facility to typeset many variants of fractions and binomials, such as $\frac{a+b}{c}$ and $\left]\begin{smallmatrix}a+b\\c\end{smallmatrix}\right[$. The syntax is

```
\genfrac{left-delim}{right-delim}{thickness}{mathstyle}
        {numerator}{denominator}
```

where

- *left-delim* is the left delimiter for the formula (default: none)
- *right-delim* is the right delimiter for the formula (default: none)
- *thickness* is the thickness of the fraction line, in the form *x*`pt` (default: the normal weight, 0.4pt), for instance, `12pt` for 12 point width
- *mathstyle* is one of
  - `0` for `\displaystyle`
  - `1` for `\textstyle`
  - `2` for `\scriptstyle`
  - `3` for `\scriptscriptstyle`
  - Default: Depends on the context. If the formula is being set in display style, then the default is `0`, and so on
- *numerator* is the numerator
- *denominator* is the denominator

All arguments must be specified. The empty argument, `{}`, gives the default value.

Examples

1. `\frac{numerator}{denominator}`
   is the same as

```
\genfrac{}{}{}{}{numerator}{denominator}
```

2. `\dfrac{numerator}{denominator}`
   is the same as

   ```
   \genfrac{}{}{}{0}{numerator}{denominator}
   ```

3. `\tfrac{numerator}{denominator}`
   is the same as

   ```
   \genfrac{}{}{}{1}{numerator}{denominator}
   ```

4. `\binom{numerator}{denominator}`
   is the same as

   ```
   \genfrac{(}{)}{0pt}{}{numerator}{denominator}
   ```

5. Here are some more examples:

$$\frac{a+b}{c} \quad \genfrac{}{}{1pt}{}{a+b}{c} \quad \genfrac{}{}{1.5pt}{}{a+b}{c} \quad \genfrac{}{}{2pt}{}{a+b}{c} \quad \genfrac{[}{]}{0pt}{}{a+b}{c} \quad \genfrac{]}{[}{0pt}{}{a+b}{c}$$

   typed as

```
\[
   \frac{a + b}{c} \quad
   \genfrac{}{}{1pt}{}{a + b}{c}   \quad
   \genfrac{}{}{1.5pt}{}{a + b}{c} \quad
   \genfrac{}{}{2pt}{}{a + b}{c}   \quad
   \genfrac{[}{]}{0pt}{}{a + b}{c} \quad
   \genfrac{]}{[}{0pt}{}{a + b}{c}
\]
```

   You can choose the delimiters from Table 7.1.

If a `\genfrac` construct is used repeatedly, you should name it. See Section 15.1 for user-defined commands.

8.6.2 Boxed formulas

The `\boxed` command puts its argument in a box, as in

(2) $$\boxed{\int_{-\infty}^{\infty} e^{-x^2}\,dx = \sqrt{\pi}}$$

typed as

```
\begin{equation}
   \boxed{ \int_{-\infty}^{\infty} e^{-x^{2}}\, dx
   = \sqrt{\pi} }
\end{equation}
```

The `\boxed` command can also be used in the argument of a `\text` command.

Note that

```
\fbox{Hello world}
```

and

```
$\boxed{\text{Hello world}}$
```

produce the same $\boxed{\text{Hello world}}$.

Morten Høgholm's `mathtools` package (see Section E.1 on how to get it), contains many variants of boxes.

CHAPTER

9

Multiline math displays

9.1 Visual Guide

LaTeX is about typesetting math. It knows a lot about typesetting inline formulas, but not much about how to display a multiline formula to best reflect its meaning in a visually pleasing way. So you have to decide the visual structure of a multiline formula and then use the tools provided by LaTeX to code and typeset it.

For many mathematical documents the three constructs of Chapter 3 suffice: *simple* and *annotated* alignments, and the *cases* construct. To help you choose the appropriate tool for more complicated constructs, we start by introducing the basic concepts and constructions with the *Visual Guide* shown on the next page.

Adjusted environments

$$x_1x_2 + x_1^2x_2^2 + x_3$$
$$x_1x_3 + x_1^2x_3^2 + x_2$$
$$x_1x_2x_3$$

`gather`
one column, centered

$$(x_1x_2x_3x_4x_5x_6)^2 + (x_1x_2x_3x_4x_5 + x_1x_3x_4x_5x_6 + x_1x_2x_4x_5x_6 + x_1x_2x_3x_5x_6)^2 + (x_1x_2x_3x_4 + x_1x_2x_3x_5 + x_1x_2x_4x_5 + x_1x_3x_4x_5)^2$$

`multline`
flush left, centered, flush right

Adjusted subsidiary environments

$$\begin{pmatrix} 1 & 0 & \dots & 0 \\ 0 & 1 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & 1 \end{pmatrix}$$

`matrix`
multicolumn, centered

$$\begin{array}{cccc} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 134 \end{array}$$

`array`
multicolumn
each column adjusted independently

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \le x \le 1; \\ x^2, & \text{otherwise.} \end{cases}$$

`cases`
columns flush left

Aligned environments

$$f(x) = x + yz \qquad g(x) = x + y + z$$
$$h(x) = xy + xz + yz \qquad k(x) = (x+y)(x+z)(y+z)$$

`align`
multicolumn, aligned

$$f(x) = x + yz \qquad g(x) = x + y + z$$
$$h(x) = xy + xz + yz \qquad k(x) = (x+y)(x+z)(y+z)$$

`flalign`
multicolumn, aligned

$$a_{11}x_1 + a_{12}x_2 + a_{13}x_3 = y_1 \tag{17}$$
$$a_{21}x_1 + a_{22}x_2 + a_{24}x_4 = y_2 \tag{18}$$
$$a_{31}x_1 + a_{33}x_3 + a_{34}x_4 = y_3 \tag{19}$$

`alignat`
multicolumn, aligned

Aligned subsidiary environment

$$\begin{aligned} 0 &= \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \\ &\equiv \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \pmod{\Theta} \end{aligned} \tag{3.4}$$

`split`
one column, aligned

Figure 9.1: The *Visual Guide* for multiline math formulas.

9.1.1 Columns

Multiline math formulas are displayed in *columns*. The columns are either *adjusted*, that is, centered, or set flush left or right, or *aligned*, that is, an alignment point is designated for each column and for each line. Moreover, the columns are either separated by the *intercolumn space* or adjacent with no separation.

One column

As in Chapter 3, we start with a simple align:

$$\begin{aligned} r^2 &= s^2 + t^2, \\ 2u + 1 &= v + w^{\alpha} \end{aligned}$$

This is a single column, aligned at the $=$ signs, and coded with the `align` environment (see Section 3.4.2).

Two columns

The annotated align, coded with the `align` environment,

$$\begin{aligned} x &= x \wedge (y \vee z) && \text{(by distributivity)} \\ &= (x \wedge y) \vee (x \wedge z) && \text{(by condition (M))} \\ &= y \vee z \end{aligned}$$

has two columns. The first column is aligned like our example of simple align, but the second column is aligned flush left. There is a sizeable intercolumn space.

9.1.2 Subsidiary math environments

The cases example in Chapter 3:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \le x \le 1; \\ x^2, & \text{otherwise.} \end{cases}$$

introduces a new concept. The part of the formula to the right of $=$ is a multiline construct. This is an example of a *subsidiary math environment* that can only be used *inside another math environment*. It creates a "large math symbol", in this case

$$\begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \le x \le 1; \\ x^2, & \text{otherwise.} \end{cases}$$

So the cases example:

$$f(x) = \text{large math symbol}$$

is a single line displayed formula, where "large math symbol" is replaced by the `cases` construct.

9.1.3 Adjusted columns

An *adjusted column* is either set *centered*, or *flush left*, or *flush right*. This may happen by default, built into the environment, or so specified in the code.

For instance, in the displayed formula

$$x_1x_2 + x_1^2x_2^2 + x_3,$$
$$x_1x_3 + x_1^2x_3^2 + x_2$$

typeset with the `gather` environment, by default all the lines are centered.

On the other hand, in

$$\begin{pmatrix} 1 & 100 & 115 \\ 201 & 0 & 1 \end{pmatrix}$$

coded with the `array` subsidiary math environment, the first column is flush left, the second centered, the third flush right.

9.1.4 Aligned columns

Aligned columns, on the other hand, are only of one kind, aligned by you. For instance,

$$\begin{aligned} f(x) &= x + yz & g(x) &= x + y + z \\ h(x) &= xy + xz + yz & k(x) &= (x + y)(x + z)(y + z) \end{aligned}$$

is coded with the `alignat` environment. It has two aligned columns, both aligned at the = sign.

9.1.5 Touring the Visual Guide

Figure 9.1, the *Visual Guide*, shows thumbnail pictures of the various kinds of multiline math environments and subsidiary math environments.

The first part of the *Visual Guide* illustrates `gather` and `multline`. The `gather` environment is a one-column, centered math environment—discussed in Section 9.2—which is used to display a *number of formulas* collected into one multiline formula. In contrast, `multline`—discussed in Section 9.3—displays *one long formula* in a number of lines. The first line is set flush left, the last line set flush right, and the rest (if any) of the lines are centered.

The third part of the *Visual Guide* illustrates the `align` environment and two of its variants, `alignat` and `flalign`, discussed in Section 9.5.

Three adjusted subsidiary math environments—`matrix`, `cases`, and `array`—are illustrated in second part of the *Visual Guide* and presented in Section 9.7.

The aligned subsidiary math environments `aligned` and `gathered` look just like the `align` and `gather` environments, so they are not illustrated in the *Visual Guide*. The `aligned` and `gathered` environments—along with `\itemref`—are discussed in Section 9.6, along with the `split` subsidiary math environment; this last one is illustrated in the last part of the *Visual Guide*.

9.2 Gathering formulas

The `gather` environment groups a number of one-line formulas, each centered on a separate line:

$$x_1x_2 + x_1^2x_2^2 + x_3, \tag{1}$$

$$x_1x_3 + x_1^2x_3^2 + x_2, \tag{2}$$

$$x_1x_2x_3. \tag{3}$$

Formulas (1)–(3) are typed as follows:

```
\begin{gather}
 x_{1} x_{2}+x_{1}^{2} x_{2}^{2} + x_{3},\label{E:1.1}\\
 x_{1} x_{3}+x_{1}^{2} x_{3}^{2} + x_{2},\label{E:1.2}\\
 x_{1} x_{2} x_{3}.\label{E:1.3}
\end{gather}
```

Rule ■ `gather` environment

1. Lines are separated with `\\`. Do not type a `\\` at the end of the last line!
2. Each line is numbered unless it has a `\tag` or `\notag` on the line before the line separator `\\`.
3. No blank lines are permitted within the environment.

The `gather*` environment is like `gather`, except that all lines are unnumbered. They can still be `\tag`-ged.

It would seem natural to code formulas (1)–(3) with three `equation` environments:

```
\begin{equation}
   x_{1} x_{2}+x_{1}^{2} x_{2}^{2} + x_{3},\label{E:1.1}
\end{equation}
\begin{equation}\label
```

```
   x_{1} x_{3}+x_{1}^{2} x_{3}^{2} + x_{2},\label{E:1.2}
\end{equation}
\begin{equation}
   x_{1} x_{2} x_{3}.\label{E:1.3}
\end{equation}
```

Note how bad this looks typeset:

$$x_1x_2 + x_1^2x_2^2 + x_3, \tag{1}$$

$$x_1x_3 + x_1^2x_3^2 + x_2, \tag{2}$$

$$x_1x_2x_3. \tag{3}$$

9.3 Splitting long formulas

The `multline` environment is used to split one very long formula into several lines. The first line is set flush left, the last line is set flush right, and the middle lines are centered:

$$\begin{aligned}(x_1x_2x_3x_4x_5x_6)^2 &\\ + (y_1y_2y_3y_4y_5 + y_1y_3y_4y_5y_6 + y_1y_2y_4y_5y_6 + y_1y_2y_3y_5y_6)^2 &\\ + (z_1z_2z_3z_4z_5 + z_1z_3z_4z_5z_6 + z_1z_2z_4z_5z_6 + z_1z_2z_3z_5z_6)^2 &\\ + (u_1u_2u_3u_4 + u_1u_2u_3u_5 + u_1u_2u_4u_5 + u_1u_3u_4u_5)^2 &\end{aligned} \tag{4}$$

This formula is typed as

```
\begin{multline}\label{E:mm2}
   (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}\\
   + (y_{1} y_{2} y_{3} y_{4} y_{5}
   + y_{1} y_{3} y_{4} y_{5} y_{6}
   + y_{1} y_{2} y_{4} y_{5} y_{6}
   + y_{1} y_{2} y_{3} y_{5} y_{6})^{2}\\
   + (z_{1} z_{2} z_{3} z_{4} z_{5}
   + z_{1} z_{3} z_{4} z_{5} z_{6}
   + z_{1} z_{2} z_{4} z_{5} z_{6}
   + z_{1} z_{2} z_{3} z_{5} z_{6})^{2}\\
   + (u_{1} u_{2} u_{3} u_{4} + u_{1} u_{2} u_{3} u_{5}
 + u_{1} u_{2} u_{4} u_{5} + u_{1} u_{3} u_{4} u_{5})^{2}
\end{multline}
```

Rule ■ `multline` environment

1. Lines are separated with \\. Do not type a \\ at the end of the last line!
2. The formula is numbered *as a whole* unless it is \tag-ged or the numbering is suppressed with \notag. (Alternatively, use the `multline*` environment.)
3. No blank lines are permitted within the environment.
4. Each line is a subformula (see Section 9.4.2).

If you are very observant, you may have noticed that we failed to type {}+ following the line separators of the formula. In Section 8.1.2, you were told that this omission would result in the second line being typeset as

$$+(y_1y_2y_3y_4y_5 + y_1y_3y_4y_5y_6 + y_1y_2y_4y_5y_6 + y_1y_2y_3y_5y_6)^2$$

The `multline` environment, however, knows that a long formula is being broken and so typesets + as a binary operation.

A common mistake is to write `multiline` for `multline`, resulting in the message:

```
! LaTeX Error: Environment multiline undefined.
```

In the `multline*` environment, the formula is not numbered but can be \tag-ged.

The indentation of the first and last lines is controlled by the \multlinegap length command, with a default of 10 points, unless there is a tag on one of those lines. You can adjust the indentation by enclosing the `multline` environment in a `setlength` environment (see Section 15.5.2), as follows:

```
\begin{multline*}
   (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}\\
   + (x_{1} x_{2} x_{3} x_{4} x_{5}
   + x_{1} x_{3} x_{4} x_{5} x_{6}
   + x_{1} x_{2} x_{4} x_{5} x_{6}
   + x_{1} x_{2} x_{3} x_{5} x_{6})^{2}\\
   + (x_{1} x_{2} x_{3} x_{4} + x_{1} x_{2} x_{3} x_{5}
   + x_{1} x_{2} x_{4} x_{5} + x_{1} x_{3} x_{4})^{2}
\end{multline*}
\begin{setlength}{\multlinegap}{0pt}
   \begin{multline*}
     (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}\\
     + (x_{1} x_{2} x_{3} x_{4} x_{5}
     + x_{1} x_{3} x_{4} x_{5} x_{6}
     + x_{1} x_{2} x_{4} x_{5} x_{6}
```

```
     + x_{1} x_{2} x_{3} x_{5} x_{6})^{2}\\
     + (x_{1} x_{2} x_{3} x_{4} + x_{1} x_{2} x_{3} x_{5}
     + x_{1} x_{2} x_{4} x_{5} + x_{1} x_{3} x_{4})^{2}
   \end{multline*}
\end{setlength}
```

which typesets as

$$\begin{aligned}&(x_1x_2x_3x_4x_5x_6)^2\\&\qquad+(x_1x_2x_3x_4x_5+x_1x_3x_4x_5x_6+x_1x_2x_4x_5x_6+x_1x_2x_3x_5x_6)^2\\&\qquad\qquad+(x_1x_2x_3x_4+x_1x_2x_3x_5+x_1x_2x_4x_5+x_1x_3x_4)^2\end{aligned}$$

$$\begin{aligned}&(x_1x_2x_3x_4x_5x_6)^2\\&\qquad+(x_1x_2x_3x_4x_5+x_1x_3x_4x_5x_6+x_1x_2x_4x_5x_6+x_1x_2x_3x_5x_6)^2\\&\qquad\qquad+(x_1x_2x_3x_4+x_1x_2x_3x_5+x_1x_2x_4x_5+x_1x_3x_4)^2\end{aligned}$$

Notice that the second variant is not indented.

Any line of a `multline` environment can be typeset flush left or right by making it the argument of a `\shoveleft` or `\shoveright` command, respectively (same with `multline*`). For instance, to typeset the second line of formula (4) flush left, as in

$$\begin{aligned}&(x_1x_2x_3x_4x_5x_6)^2\\&+(x_1x_2x_3x_4x_5+x_1x_3x_4x_5x_6+x_1x_2x_4x_5x_6+x_1x_2x_3x_5x_6)^2\\&\qquad\qquad+(x_1x_2x_3x_4+x_1x_2x_3x_5+x_1x_2x_4x_5+x_1x_3x_4x_5)^2\end{aligned}$$

type the formula as follows:

```
\begin{multline*}
   (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}\\
   \shoveleft{+ (x_{1} x_{2} x_{3} x_{4} x_{5}
     + x_{1} x_{3} x_{4} x_{5} x_{6}
     + x_{1} x_{2} x_{4} x_{5} x_{6}
     + x_{1} x_{2} x_{3} x_{5} x_{6})^{2}}\\
     + (x_{1} x_{2} x_{3} x_{4} + x_{1} x_{2} x_{3} x_{5}
     + x_{1} x_{2} x_{4} x_{5}
                   + x_{1} x_{3} x_{4} x_{5})^{2}
\end{multline*}
```

Observe that the entire line is the argument of the `\shoveleft` command, which is followed by `\\` unless it is the last line of the environment.

9.4 Some general rules

9.4.1 General rules

Even though you have only seen a few examples of multiline math environments, I venture to point out now that the multiline math environments and subsidiary math environments share a number of rules.

Rule ■ Multiline math environments

1. Lines are separated with \\. Do not type a \\ at the end of the last line!
2. No blank lines are permitted within an environment.
3. If an environment contains more than one formula, then, as a rule, each formula is numbered separately. If you add a `\label` command to a line, then the equation number generated for that line can be cross-referenced.
4. You can suppress the numbering of a line by using a `\notag` command on the line.
5. You can also override numbering with the `\tag` command, which works just as it does for equations (see Section 8.5).
6. `\tag` and `\label` should always precede the line separator \\ for lines that are regarded as formulas in their own right. For instance, the lines of the `multline` environment cannot be individually numbered or tagged. The `\tag` command works for individual lines, not for the environment as a whole.
7. For cross-referencing, use `\label`, `\ref`, and `\eqref` in the same way you would for an equation (see Section 10.4.2).
8. Each multiline math environment has a `*`-ed form, which suppresses numbering. Individual formulas can still be `\tag`-ged.

A `\notag` command placed after the environment is ignored, but a `\tag` command gives the error message

```
! Package amsmath Error: \tag not allowed here.
```

9.4.2 Subformula rules

A formula in the `multline` environment is split into a number of parts by \\ commands; for instance, formula (4) is split into three parts:

```
1. (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}
```

```
2.  + (x_{1} x_{2} x_{3} x_{4} x_{5}
      + x_{1} x_{3} x_{4} x_{5} x_{6}
      + x_{1} x_{2} x_{4} x_{5} x_{6}
      + x_{1} x_{2} x_{3} x_{5} x_{6})^{2}

3.  + (x_{1} x_{2} x_{3} x_{4}+x_{1} x_{2} x_{3} x_{5} +
     x_{1} x_{2} x_{4} x_{5}+x_{1} x_{3} x_{4} x_{5})^{2}
```

Such parts of a formula are called *subformulas.*

The first line of the aligned formula $r^2 = s^2 + t^2$—from the simple alignment example in Section 3.4.2—which is typed as

```
r^{2} &= s^{2} + t^{2}
```

is split into two parts:

```
1.  r^{2}

2.      = s^{2} + t^{2}
```

In general, in a line of an aligned formula, the first part is everything between the beginning of the line and the first `&` symbol. There can then be a number of parts delimited by two consecutive `&` symbols. Finally, the last part is from the last `&` symbol to the end of the line or the line separator `\\`. These parts are also called *subformulas.*

Here are the last of the general rules.

Rule ■ Subformula

1. Each subformula must be a formula that LaTeX can typeset independently.
2. If a subformula starts with the binary operation `+` or `-`, type it as `{}+` or `{}-`.
3. If a subformula ends with the binary operation `+` or `-`, type it as `+{}` or `-{}`.

Suppose that you want to split the formula

$$x_1 + y_1 + \left(\sum_{i<5} \binom{5}{i} + a^2 \right)^2$$

just before the binomial coefficient. Try

```
\begin{multline}
   x_{1} + y_{1} + \left( \sum_{i < 5}\\
    \binom{5}{i} + a^{2} \right)^{2}
\end{multline}
```

When typesetting this formula, you get the error message

```
! Missing \right. inserted.
```

because the first subformula violates the first subformula rule.

```
x_{1} + y_{1} + \left( \sum_{i < 5}
```

cannot be typeset by LaTeX because the `\left(` command must be matched by the `\right` command and some delimiter.

Testing for the first subformula rule is easy. Split the formula into its subformulas, and test each subformula separately by typesetting it.

9.4.3 Breaking and aligning formulas

You do not have to know where and how to break inline math formulas because LaTeX does all the work for you.

Unfortunately, multiline formulas are different. LaTeX gives you excellent tools for displaying multiline math formulas, but offers you no advice on deciding where to break a long formula into lines. And that is how it should be. You, the author, are the only judge of where to break a long formula so that the result is mathematically informative and follows the traditions of mathematical typesetting.

A strict set of rules is formulated in *Mathematics into Type* by Ellen Swanson, Arlene Ann O'Sean, and Antoinette Tingley Schleyer [58]. I state only three.

Rule ■ Breaking displayed formulas

1. Try to break a long formula *before* a binary relation or binary operation.
2. If you break a formula before a `+` or `-`, start the next line with `{}+` or `{}-`.
3. If you break a formula within a bracket, indent the next line so that it begins *to the right of* the opening bracket.

Formula (4) on page 212 illustrates the first rule. Here is an illustration of the third rule:

$$f(x,y,z,u) = [(x+y+z) \times (x^2+y^2+z^2-1) \\ \times (x^3+y^3+z^3-u) \times (x^4+y^4+z^4+u)]^2$$

The rules for aligning columns are similar.

Rule ■ Aligning columns

1. Try to align columns at a binary relation or a binary operation.
2. If you align a column at a binary relation, put the `&` symbol immediately *to the left* of the binary relation.
3. If you align a column at the binary operation `+` or `-`, put the `&` symbol to the left of the binary operation.

9.4.4 Numbering groups of formulas

With most constructs in this chapter, you have a number of equations typeset together, arranged in some way, aligned or adjusted. Each equation is numbered separately, unless `\tag`-ged or `\notag`-ged. Often, you may want the equations to share a common number, but still be able to reference each equation separately.

You can change the numbering of the equations on page 211 in formulas (1)–(3) to (1), (1a), and (1b) as follows:

```
\begin{gather}
   x_{1} x_{2} + x_{1}^{2} x_{2}^{2} + x_{3},
   \label{E:1}\\
   x_{1} x_{3} + x_{1}^{2} x_{3}^{2} + x_{2},
   \tag{\ref{E:1}a}\\
   x_{1} x_{2} x_{3};\tag{\ref{E:1}b}
\end{gather}
```

produces the desired result:

$$x_1x_2 + x_1^2x_2^2 + x_3, \tag{1}$$

$$x_1x_3 + x_1^2x_3^2 + x_2, \tag{1a}$$

$$x_1x_2x_3; \tag{1b}$$

To obtain $(1')$ or $(1')$ type

```
\tag{\ref{E:1}$'$}
```

or

```
\tag{(\ref{E:1}\textquoteright)}
```

and for (1_{a}), type

```
\tag{\ref{E:1}${}_{\text{a}}$}
```

Alternatively, you may include the `gather` environment in a `subequations` environment (see Section 8.5):

$$x_1x_2 + x_1^2x_2^2 + x_3, \tag{5a}$$

$$x_1x_3 + x_1^2x_3^2 + x_2, \tag{5b}$$

$$x_1x_2x_3, \tag{5c}$$

typed as

```
\begin{subequations}\label{E:gp}
   \begin{gather}
      x_{1} x_{2} + x_{1}^{2} x_{2}^{2} + x_{3},
      \label{E:gp1}\\
      x_{1} x_{3} + x_{1}^{2} x_{3}^{2} + x_{2},
      \label{E:gp2}\\
      x_{1} x_{2} x_{3},\label{E:gp3}
   \end{gather}
\end{subequations}
```

Then `\eqref{E:gp}` references the whole group of equations as (5), while

`\eqref{E:gp1}`, `\eqref{E:gp2}`, and `\eqref{E:gp3}`

reference the individual formulas as (5a), (5b), and (5c).

9.5 Aligned columns

The lines of multiline formulas are naturally divided into columns. In this section, we discuss how to typeset such formulas with *aligned columns.* All of these constructs are implemented with the `align` math environment and its variants.

In Section 3.4.2, you saw two simple, one-column examples of aligned columns—which we called *simple alignment*—and a special case of aligned columns—which we called *annotated alignment*.

The `align` environment can also create multiple aligned columns. The number of columns is restricted only by the width of the page. In the following example, there are two aligned columns:

$$\begin{aligned} f(x) &= x + yz & g(x) &= x + y + z \\ h(x) &= xy + xz + yz & k(x) &= (x + y)(x + z)(y + z) \end{aligned} \tag{6}$$

typed as

```
\begin{align}\label{E:mm3}
   f(x) &= x + yz         & g(x) &= x + y + z\\
   h(x) &= xy + xz + yz   & k(x) &= (x + y)(x + z)(y + z)
    \notag
\end{align}
```

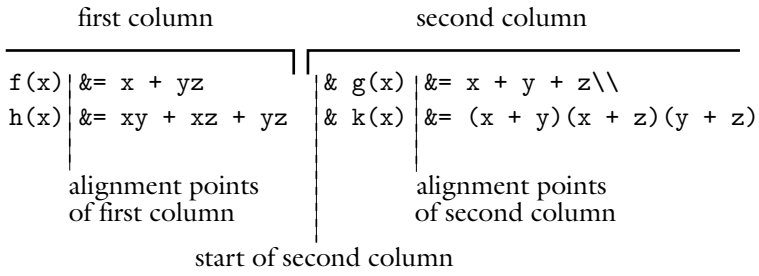
first column
second column
f(x) &= x + yz
h(x) &= xy + xz + yz
& g(x) &= x + y + z\\
& k(x) &= (x + y)(x + z)(y + z)
alignment points of first column
alignment points of second column
start of second column

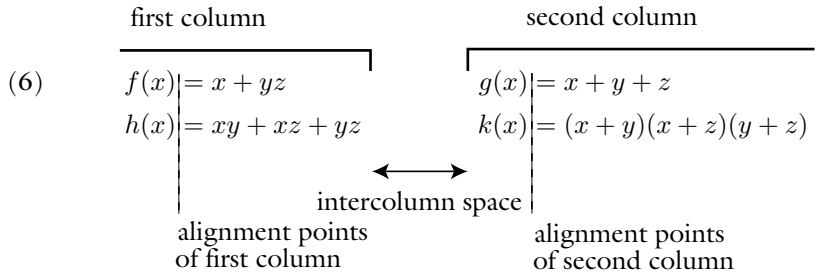
first column
second column
(6)
$f(x) = x + yz$
$h(x) = xy + xz + yz$
$g(x) = x + y + z$
$k(x) = (x + y)(x + z)(y + z)$
intercolumn space
alignment points of first column
alignment points of second column

Figure 9.2: Two aligned columns: source and typeset.

Use Figure 9.2 to visualize how the alignment points in the source turn into alignment points in the typeset formula and the role played by the intercolumn space. Remember that the visual layout of the source is for your benefit only.

In a multicolumn `align` environment, the ampersand (`&`) plays two roles. It is a mark for the *alignment point* and it is also a *column separator.* In the line

```
f(x) &= x + yz        & g(x) &= x + y + z
```

the two columns are

```
f(x) &= x + yz
```

and

```
g(x) &= x + y + z
```

In each column, we use a single ampersand to mark the alignment point. Of the three & symbols in the previous example,

- The first & marks the *alignment point* of the first column.
- The second & is a *column separator* that separates the first and second columns.
- The third & marks the *alignment point* of the second column.

I use the convention of typing a space on the left of an alignment point & and no space on the right, and of putting spaces on both sides of & as a column separator.

If the number of columns is three, then there should be five &'s in each line. Even-numbered &'s are column separators and odd-numbered &'s are alignment marks.

Rule ■ Ampersands

If there are n aligned columns, then each line should have at most $2n - 1$ ampersands. Even-numbered &'s are column separators; odd-numbered &'s mark the alignment points.

So for a single aligned column, you have to place one alignment point for each line. For two aligned columns, you have to place at most three alignment points for each line. The beginning of the line to the second & is the first column, then from the second & to the end of the line is the second column. Each line of each column has an alignment point marked by &.

A column in a line may be empty—a gap is produced—or it may have only a few columns. Both of these are illustrated by

$$\begin{aligned} a_1 &\qquad & c_1 \\ & b_2 & c_2 \\ a_3 & & \end{aligned}$$

typed as

```
\begin{align*}
   & a_1 &  &    &  &c_1\\
   &     &  &b_2 &  &c_2\\
   & a_3
\end{align*}
```

9.5.1 *An* `align` *variant*

A variant of `align` is the flush alignment environment `flalign`, which moves the leftmost column as far left and the rightmost column as far right as space allows, making more room for the formula. Here is formula (6) again, followed by the `flalign` variant:

$$f(x) = x + yz \qquad g(x) = x + y + z \tag{6}$$
$$h(x) = xy + xz + yz \qquad k(x) = (x + y)(x + z)(y + z)$$

$$f(x) = x + yz \qquad g(x) = x + y + z \tag{7}$$
$$h(x) = xy + xz + yz \qquad k(x) = (x + y)(x + z)(y + z)$$

The variant is typed as follows:

```
\begin{flalign}\label{E:mm3fl}
   f(x) &= x + yz       & g(x) &= x + y + z\\
   h(x) &= xy + xz + yz & k(x) &= (x + y)(x + z)(y + z)
    \notag
\end{flalign}
```

9.5.2 `eqnarray`, *the ancestor of* `align`

LaTeX's original aligned math environment is `eqnarray`. Here is an example:

```
\begin{eqnarray}
   x & = & 17y\\
   y & > & a + b + c
\end{eqnarray}
```

which typesets as

$$x = 17y \tag{8}$$
$$y > a + b + c \tag{9}$$

You can type the same formulas with `align`:

```
\begin{align}
   x  & =  17y\\
   y  & >  a + b + c
\end{align}
```

which typesets as

$$x = 17y \tag{10}$$
$$y > a + b + c \tag{11}$$

In the `eqnarray` environment the spacing is based on the spacing of the columns rather than on the spacing requirements of the symbols.

I mention `eqnarray` not for historical reasons but for a very practical one. Unfortunately, a large number of journal submissions still use this construct, and have to be recoded in the editorial offices. Be kind to your editor, and do not use `eqnarray`.

9.5.3 The subformula rule revisited

Suppose that you want to align the formula

$$x_1 + y_1 + \left(\sum_i \binom{5}{i} + a^2 \right)^2$$

with

$$\left(\sum_i \binom{5}{i} + \alpha^2 \right)^2$$

so that the $+ a^2$ in the first formula aligns with the $+ \alpha^2$ in the second formula. You might try typing

```
\begin{align*}
   x_{1} + y_{1} + \left( \sum_i \binom{5}{i}
            &+ a^{2} \right)^{2}\\
    \left( \sum_i \binom{5}{i} &+ \alpha^{2} \right)^{2}
\end{align*}
```

But when you typeset this formula, you get the error message

```
! Extra }, or forgotten \right.
```

This alignment structure violates the subformula rule because LaTeX cannot typeset

```
 x_{1} + y_{1} + \left( \sum_i \binom{5}{i}
```

so it is not a subformula.

As another simple example, try to align the + in $\binom{a+b}{2}$ with the + in $x + y$:

```
\begin{align}
  \binom{a &+ b}{2}\\
    x &+ y
\end{align}
```

When typesetting this formula, you get the error message

```
! Missing } inserted.
```

Again, LaTeX cannot typeset the subformula `\binom{a`.

To align the two formulas in the first example, add a `\phantom` command to push the second line to the right:

```
\begin{align*}
   &x_{1} + y_{1} + \left( \sum_{i < 5} \binom{5}{i}
      + a^{2} \right)^{2}\\
   &\phantom{x_{1} + y_{1} + {}}
      \left( \sum_{i < 5} \binom{5}{i} + \alpha^{2}
      \right)^{2}
\end{align*}
```

yielding

$$x_1 + y_1 + \left(\sum_{i<5} \binom{5}{i} + a^2\right)^2 \left(\sum_{i<5} \binom{5}{i} + \alpha^2\right)^2$$

9.5.4 *The* `alignat` *environment*

Another variant of the `align` environment is the `alignat` environment, which is one of the most important alignment environments. While the `align` environment calculates how much space to put between the columns, the `alignat` environment leaves spacing up to the user. It is important to note that the `alignat` environment has a required argument, the number of columns.

Here is formula (6) typed with the `alignat` environment:

```
\begin{alignat}{2}\label{E:mm3A}
   f(x) &= x + yz        & g(x) &= x + y + z\\
   h(x) &= xy + xz + yz & k(x) &= (x + y)(x + z)(y + z)
   \notag
\end{alignat}
```

which typesets as

$$f(x) = x + yz \qquad g(x) = x + y + z$$
$$h(x) = xy + xz + yzk(x) = (x + y)(x + z)(y + z) \tag{12}$$

This attempt did not work very well because `alignat` did not separate the two formulas in the second line. So you must provide the intercolumn spacing. For instance, if you want a `\qquad` space between the columns, as in

$$f(x) = x + yz \qquad g(x) = x + y + z$$
$$h(x) = xy + xz + yz \qquad k(x) = (x + y)(x + z)(y + z) \tag{13}$$

then type the formula as

```
\begin{alignat}{2}\label{E:mm3B}
   f(x) &= x + yz               & g(x) &= x + y + z\\
   h(x) &= xy + xz + yz \qquad & k(x) &= (x+y)(x+z)(y+z)
    \notag
\end{alignat}
```

The `alignat` environment is especially appropriate when annotating formulas where you would normally want a `\quad` between the formula and the text. To obtain

$$\begin{aligned} x &= x \wedge (y \vee z) && \text{(by distributivity)} \\ &= (x \wedge y) \vee (x \wedge z) && \text{(by condition (M))} \\ &= y \vee z \end{aligned} \tag{14}$$

type

```
\begin{alignat}{2}\label{E:mm4}
   x &= x \wedge (y \vee z) &
   &\quad\text{(by distributivity)}\\
     &= (x \wedge y) \vee (x \wedge z) & &
      \quad\text{(by condition (M))}\notag\\
     &= y \vee z \notag
\end{alignat}
```

`alignat` is very important for typing systems of equations such as

$$(A + BC)x + \qquad Cy = 0, \tag{15}$$

$$Ex + (F + G)y = 23. \tag{16}$$

typed as follows:

```
\begin{alignat}{2}
   (A + B C)x &+{} &C      &y = 0,\\
           Ex &+{} &(F + G)&y = 23.
\end{alignat}
```

Note again `+{}`. See the subformula rule in Section 9.4.2.

As a last example, consider

$$a_{11}x_1 + a_{12}x_2 + a_{13}x_3 \qquad = y_1, \tag{17}$$

$$a_{21}x_1 + a_{22}x_2 \qquad + a_{24}x_4 = y_2, \tag{18}$$

$$a_{31}x_1 \qquad + a_{33}x_3 + a_{34}x_4 = y_3. \tag{19}$$

typed as

```
\begin{alignat}{4}
  a_{11}x_1 &+ a_{12}x_2 &&+ a_{13}x_3 &&
    &&= y_1,\\
  a_{21}x_1 &+ a_{22}x_2 &&            &&+ a_{24}x_4
    &&= y_2,\\
  a_{31}x_1 &            &&+ a_{33}x_3 &&+ a_{34}x_4
    &&= y_3.
\end{alignat}
```

Note that the argument of `alignat` does not have to be precise. If you want two columns, the argument can be `2`, or `3`, or any larger number. If you want to, you can simply type `10` and just ignore the argument. You may define a new environment (see Section 15.2.1) that does just that.

9.5.5 Inserting text

The `\intertext` command places one or more lines of text in the middle of an aligned environment. For instance, to obtain

$$h(x) = \int \left(\frac{f(x) + g(x)}{1 + f^2(x)} + \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}} \right) dx \tag{20}$$

The reader may find the following form easier to read:

$$= \int \frac{1 + f(x)}{1 + g(x)}\, dx - 2 \arctan(x - 2)$$

you would type

```
\begin{align}\label{E:mm5}
      h(x) &= \int \left(
                          \frac{ f(x) + g(x) }
                               {1 + f^{2}(x)} +
                          \frac{1 + f(x)g(x)}
                               { \sqrt{1 - \sin x} }
                    \right) \, dx\\
   \intertext{The reader may find the following form
         easier to read:}
      &= \int \frac{1 + f(x)}
                   {1 + g(x)}
         \, dx - 2 \arctan(x - 2) \notag
\end{align}
```

Notice how the equal sign in the first formula is aligned with the equal sign in the second formula even though a line of text separates the two.

Here is another example, this one using `align*`:

$$f(x) = x + yz \qquad\qquad g(x) = x + y + z$$

The reader may also find the following polynomials useful:

$$h(x) = xy + xz + yz \qquad\qquad k(x) = (x + y)(x + z)(y + z)$$

is typed as

```
\begin{align*}
   f(x) &= x + yz & \qquad g(x) &= x + y + z\\
   \intertext{The reader may also find the following
    polynomials useful:}
   h(x) &= xy + xz + yz
                  & \qquad k(x) &= (x + y)(x + z)(y + z)
\end{align*}
```

The `\intertext` command must follow a line separator command, `\\` or `\\*` (see Section 9.9). If you violate this rule, you get the error message

```
! Misplaced \noalign. \intertext #1->\noalign
                        {\penalty \postdisplaypenalty
                                      \vskip ...
```

The text in `\intertext` can be centered using a `center` environment or with the `\centering` command (see Section 6.3).

9.6 Aligned subsidiary math environments

A *subsidiary math environment* is a math environment that can only be used *inside another math environment*. Think of it as creating a "large math symbol".

In this section, we discuss aligned subsidiary math environments. We discuss adjusted subsidiary math environments, including `cases`, in Section 9.7.

9.6.1 Subsidiary variants

The `align`, `alignat`, and `gather` environments (see Sections 9.5, 9.5.4, and 9.2) have subsidiary versions. They are called `aligned`, `alignedat`, and `gathered`. To obtain

$$\begin{aligned} x &= 3 + \mathbf{p} + \alpha \\ y &= 4 + \mathbf{q} \\ z &= 5 + \mathbf{r} \\ u &= 6 + \mathbf{s} \end{aligned} \quad \text{using} \quad \begin{aligned} \mathbf{p} &= 5 + a + \alpha \\ \mathbf{q} &= 12 \\ \mathbf{r} &= 13 \\ \mathbf{s} &= 11 + d \end{aligned}$$

type

```
\[
   \begin{aligned}
      x &= 3 + \mathbf{p} + \alpha\\
      y &= 4 + \mathbf{q}\\
      z &= 5 + \mathbf{r}\\
      u &=6 + \mathbf{s}
   \end{aligned}
   \text{\qquad using\qquad}
   \begin{gathered}
      \mathbf{p} = 5 + a + \alpha\\
      \mathbf{q} = 12\\
      \mathbf{r} = 13\\
      \mathbf{s} = 11 + d
   \end{gathered}
\]
```

Note how the list of aligned formulas

$$\begin{aligned} x &= 3 + p + \alpha \\ y &= 4 + \mathbf{q} \\ z &= 5 + \mathbf{r} \\ u &= 6 + \mathbf{s} \end{aligned}$$

and the list of centered formulas

$$\begin{gathered} \mathbf{p} = 5 + a + \alpha \\ \mathbf{q} = 12 \\ \mathbf{r} = 13 \\ \mathbf{s} = 11 + d \end{gathered}$$

are treated as individual large symbols.

The `aligned`, `alignedat`, and `gathered` subsidiary math environments follow the same rules as `align` and `gather`. The `aligned` subsidiary math environment allows any number of columns, but you must specify the intercolumn spacing as in the `alignat` environment.

You can use the `aligned` subsidiary math environment to rewrite formula (5) from Section 3.4.2 so that the formula number is centered between the two lines:

$$\begin{aligned} h(x) &= \int \left(\frac{f(x) + g(x)}{1 + f^2(x)} + \frac{1 + f(x)g(x)}{\sqrt{1 - \sin x}} \right) dx \\ &= \int \frac{1 + f(x)}{1 + g(x)}\, dx - 2 \arctan(x - 2) \end{aligned} \tag{21}$$

is typed as

```
\begin{equation}\label{E:mm6}
\begin{aligned}
   h(x) &= \int \left(
                      \frac{ f(x) + g(x) }
                           { 1 + f^{2}(x) } +
                      \frac{ 1 + f(x)g(x) }
                           { \sqrt{1 - \sin x} }
                \right) \, dx\\
        &= \int \frac{ 1 + f(x) }
                     { 1 + g(x) } \, dx - 2 \arctan (x - 2)
\end{aligned}
\end{equation}
```

See Section 9.6.2 for a better way to split a long formula.

Symbols, as a rule, are vertically centrally aligned. This is not normally an issue with math symbols, but it may be important with large symbols created by subsidiary math environments. The subsidiary math environments, `aligned`, `gathered`, and `array`, take `c`, `t`, or `b` as optional arguments to force vertically centered, top, or bottom alignment, respectively. The default is `c` (centered). To obtain

$$\begin{aligned} x &= 3 + \mathbf{p} + \alpha & \mathbf{p} &= 5 + a + \alpha \\ y &= 4 + \mathbf{q} & \mathbf{q} &= 12 \\ z &= 5 + \mathbf{r} & \mathbf{r} &= 13 \\ u &= 6 + \mathbf{s} \quad \text{using} & \mathbf{s} &= 11 + d \end{aligned}$$

for example, you would type

```
\[
   \begin{aligned}[b]
      x &= 3 + \mathbf{p} + \alpha\\
      y &= 4 + \mathbf{q}\\

      z &= 5 + \mathbf{r}\\
      u &=6 + \mathbf{s}
   \end{aligned}
   \text{\qquad using\qquad}
   \begin{gathered}[b]
      \mathbf{p} = 5 + a + \alpha\\
      \mathbf{q} = 12\\
      \mathbf{r} = 13\\
      \mathbf{s} = 11 + d
   \end{gathered}
\]
```

There is no numbering or `\tag`-ing allowed in subsidiary math environments because LaTeX does not number or tag what it considers to be a single symbol.

9.6.2 Split

The `split` subsidiary math environment is used to split a long formula into aligned parts. There are two major reasons to use `split`:

1. The math environment that contains it considers the `split` environment to be a single equation, so it generates only one number for it.

2. If a `split` environment appears inside an `align` environment, the alignment point of the `split` environment is recognized by `align` and is used in aligning all the formulas in the `align` environment.

To illustrate the first reason, consider

$$\begin{aligned}(x_1x_2x_3x_4x_5x_6)^2 \\ + (x_1x_2x_3x_4x_5 + x_1x_3x_4x_5x_6 + x_1x_2x_4x_5x_6 + x_1x_2x_3x_5x_6)^2\end{aligned} \tag{22}$$

typed as

```
\begin{equation}\label{E:mm7}
   \begin{split}
       (x_{1}x_{2}&x_{3}x_{4}x_{5}x_{6})^{2}\\
                  &+ (x_{1}x_{2}x_{3}x_{4}x_{5}
                   + x_{1}x_{3}x_{4}x_{5}x_{6}
                   + x_{1}x_{2}x_{4}x_{5}x_{6}
                   + x_{1}x_{2}x_{3}x_{5}x_{6})^{2}
   \end{split}
\end{equation}
```

See also the two examples of `split` in the `sampart.tex` sample article in Section 11.3 and in the `samples` folder (see page 4).

To illustrate the second reason, here is an example of a `split` subsidiary math environment within an `align` environment:

$$\begin{aligned}f &= (x_1x_2x_3x_4x_5x_6)^2 \\ &= (x_1x_2x_3x_4x_5 + x_1x_3x_4x_5x_6 + x_1x_2x_4x_5x_6 + x_1x_2x_3x_5x_6)^2,\end{aligned} \tag{23}$$

$$g = y_1y_2y_3. \tag{24}$$

which is typed as

```
\begin{align}\label{E:mm8}
   \begin{split}
      f &= (x_{1} x_{2} x_{3} x_{4} x_{5} x_{6})^{2}\\
        &= (x_{1} x_{2} x_{3} x_{4} x_{5}
```

```
          + x_{1} x_{3} x_{4} x_{5} x_{6}
          + x_{1} x_{2} x_{4} x_{5} x_{6}
          + x_{1} x_{2} x_{3} x_{5} x_{6})^{2},
   \end{split}\\
      g &= y_{1} y_{2} y_{3}.\label{E:mm9}
\end{align}
```

Notice the \\ command following \end{split} to separate the lines for align.

Rule ■ split subsidiary math environment

1. split can only be used inside another math environment, such as

   displaymath, equation, align, gather, flalign, gathered

   and their *-ed variants.

2. A split formula has only one number, automatically generated by LaTeX, or one tag from a \tag command. Use the \notag command to suppress numbering.

3. The \label, \tag, or \notag command must precede \begin{split} or follow \end{split}.

If you try to use split outside a displayed math environment, you get the error message

```
! Package amsmath Error: \begin{split} won't work here.
```

You may want to read the discussion of AMS document classes and amsmath package options in Section 11.5 that modify the placement of equation numbers.

9.7 Adjusted columns

In an *adjusted* multiline math environment, the columns are adjusted so that they are displayed centered, flush left, or flush right, instead of aligned (as in Section 9.5). Since you have no control line by line over the alignment of the columns, & has only one role to play, it is the column separator.

In Sections 9.2 and 9.3, we discussed two adjusted one-column math environments, gather and multline. All the other adjusted constructs are subsidiary math environments. For example, a matrix environment (see Section 9.7.1) produces a multicolumn centered display:

$$\begin{pmatrix} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 1340 \end{pmatrix} = \begin{pmatrix} 1 & 100 & 115 & 27 \\ 201 & 0 & 1 & 1340 \end{pmatrix}$$

The `array` environment (see Section 9.7.2) produces a multicolumn adjusted display:

$$\begin{pmatrix} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 1340 \end{pmatrix} = \begin{pmatrix} 1 & 100 & 115 & 27 \\ 201 & 0 & 1 & 1340 \end{pmatrix}$$

The columns are centered, flush left, or flush right. In this example, the first matrix has three centered columns and one flush right column, while the second matrix has four flush right columns. A variant, `cases` (see Sections 3.4.3 and 9.7.3), produces two columns set flush left:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \le x \le 1; \\ x^2, & \text{otherwise.} \end{cases} \tag{25}$$

9.7.1 Matrices

Use the `matrix` subsidiary math environment to typeset matrices. For example,

```
\begin{equation*}
   \left(
   \begin{matrix}
      a + b + c & uv    & x - y & 27\\
      a + b     & u + v & z     & 1340
   \end{matrix}
   \right) =
   \left(
   \begin{matrix}
      1   & 100 & 115 & 27\\
      201 & 0   & 1   & 1340
   \end{matrix}
   \right)
\end{equation*}
```

produces

$$\left(\begin{matrix} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 1340 \end{matrix}\right) = \left(\begin{matrix} 1 & 100 & 115 & 27 \\ 201 & 0 & 1 & 1340 \end{matrix}\right)$$

If you use `matrix` on its own, i.e., outside a math environment,

```
\begin{matrix}
   a + b + c & uv    & x - y & 27\\
   a + b     & u + v & z     & 134
\end{matrix}
```

you get the error message

```
! Missing $ inserted.
<inserted text>
                $
l.5 \begin{matrix}
```

obliquely reminding you that `matrix` is a subsidiary math environment.

The `matrix` subsidiary math environment provides a matrix of up to 10 centered columns. If you need more columns, you have to ask for them. The following example sets the number of columns to 12:

```
\begin{equation}\label{E:mm12}
   \setcounter{MaxMatrixCols}{12}
   \begin{matrix}
      1 & 2 & 3 & 4 & 5 & 6 & 7 & 8 & 9 & 10 & 11 & 12\\
      1 & 2 & 3 & \hdotsfor{7}                & 11 & 12
   \end{matrix}
\end{equation}
```

produces

$$\begin{matrix} 1 & 2 & 3 & 4 & 5 & 6 & 7 & 8 & 9 & 10 & 11 & 12 \\ 1 & 2 & 3 & \cdots & \cdots & \cdots & \cdots & \cdots & \cdots & \cdots & 11 & 12 \end{matrix} \tag{26}$$

We discuss `\setcounter` and other counters further in Section 15.5.1.

You can have dots span any number of columns with the `\hdotsfor` command. The argument of the command specifies the number of columns to fill (which is one more than the number of `&`'s the command replaces). The `\hdotsfor` command must either appear at the beginning of a row or immediately following an ampersand (`&`). If you violate this rule, you get the error message

```
! Misplaced \omit.
\multispan #1->\omit
                    \mscount #1\relax \loop \ifnum
                                        \mscount ...
l.12 \end{equation}
```

The `\hdotsfor` command also takes an optional argument, a number that multiplies the spacing between the dots. The default is `1`. For instance, if we replace `\hdotsfor{7}` in the previous example by `\hdotsfor[3]{7}`, then we get

$$\begin{matrix} 1 & 2 & 3 & 4 & 5 & 6 & 7 & 8 & 9 & 10 & 11 & 12 \\ 1 & 2 & 3 & \cdots & \cdots & \cdots & \cdots & \cdots & \cdots & \cdots & 11 & 12 \end{matrix} \tag{27}$$

We can replace a part of a matrix column with a large figure.

$$a=\begin{pmatrix}(a_{11})\\ \cdots \\ (a_{n1})\end{pmatrix}\!\!\begin{matrix}\\ \\ \mathbf{0}\end{matrix}\!\!\begin{matrix}\\ \\ \end{matrix}, \quad (a_{k1})=\begin{pmatrix}0\ldots 0 & 1 & 0\ldots 0\\ & 0 & \\ \mathbf{0} & \cdots & \mathbf{0}\\ & 0 & \end{pmatrix}$$

typed as

```
\newcommand{\BigFig}[1]{\parbox{12pt}{\Huge #1}}
\newcommand{\BigZero}{\BigFig{0}}
\[
a=\left(
\begin{matrix}
(a_{11})\\
\cdots & \BigZero \\
(a_{n1})\\
\end{matrix}
\right) ,\quad
(a_{k1})=\left(
\begin{matrix}
0\ldots 0 & 1 & 0\ldots 0\\
 & 0\\
\BigZero & \cdots & \BigZero\\
 & 0\\
\end{matrix}
\right)
\]
```

Matrix variants

A matrix may be enclosed by delimiters (see Section 7.5.1) in a number of different ways:

$$\begin{matrix}a+b+c & uv\\ a+b & c+d\end{matrix} \qquad \begin{pmatrix}a+b+c & uv\\ a+b & c+d\end{pmatrix} \qquad \begin{bmatrix}a+b+c & uv\\ a+b & c+d\end{bmatrix}$$

$$\begin{vmatrix}a+b+c & uv\\ a+b & c+d\end{vmatrix} \qquad \begin{Vmatrix}a+b+c & uv\\ a+b & c+d\end{Vmatrix} \qquad \begin{Bmatrix}a+b+c & uv\\ a+b & c+d\end{Bmatrix}$$

The first matrix is typed as

```
\begin{matrix}
   a + b + c & uv\\
   a + b     & c + d
\end{matrix}
```

The others are typed in the same way, except that they use the `pmatrix`, `bmatrix`, `vmatrix`, `Vmatrix`, and `Bmatrix` environments, respectively. We can use other delimiters, as in

```
\begin{equation*}
   \left(
   \begin{matrix}
      1      &    0   & \dots   & 0\\
      0      &    1   & \dots   & 0\\
      \vdots & \vdots & \ddots  & \vdots\\
      0      &    0   & \dots   & 1
   \end{matrix}
   \right]
\end{equation*}
```

which produces

$$\left(\begin{matrix} 1 & 0 & \dots & 0 \\ 0 & 1 & \dots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \dots & 1 \end{matrix}\right]$$

This example also uses *vertical dots* provided by the `\vdots` commands and *diagonal dots* provided by the `\ddots` commands.

Small matrix

If you put a `matrix` in an inline math formula, it may be too large. Instead, use the `smallmatrix` environment. Compare $\begin{pmatrix} a+b+c & uv \\ a+b & c+d \end{pmatrix}$, typed as

```
$\begin{pmatrix}
   a + b + c & uv\\
   a + b     & c + d
\end{pmatrix}$
```

with the small matrix $\left(\begin{smallmatrix} a+b+c & uv \\ a+b & c+d \end{smallmatrix}\right)$, typed as

```
$\left(
\begin{smallmatrix}
   a + b + c & uv\\
   a + b     & c + d
\end{smallmatrix}
\right)$
```

There are no delimited variants of `smallmatrix` similar to those of `matrix`. Instead, use the `\left` and `\right` commands with delimiters to enclose a small matrix. The `\hdotsfor` command does not work in a small matrix.

9.7.2 Arrays

The `array` subsidiary math environment is similar to the `matrix` subsidiary math environment. There are two major differences, however. For an `array` you must specify the alignment of each column and you have more options to customize it.

The first matrix in the introduction to Section 9.7 would be typed as follows using the `array` subsidiary math environment:

```
\begin{equation*}
   \left(
   \begin{array}{cccc}
      a + b + c & uv    & x - y & 27\\
      a + b     & u + v & z     & 134
   \end{array}
   \right)
\end{equation*}
```

which produces

$$\left(\begin{array}{cccc} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 134 \end{array} \right)$$

Rule ■ `array` subsidiary math environment

1. Adjacent columns are separated by an ampersand (`&`).
2. The argument of `\begin{array}` is mandatory. The argument is a series of the letters `l`, `r`, or `c`, signifying that the corresponding column in the array should be set flush left, flush right, or centered, respectively.

The matrix

$$\left(\begin{array}{cccc} a+b+c & uv & x-y & 27 \\ a+b & u+v & z & 134 \end{array} \right)$$

could not have been typeset with `matrix` since the last column is set flush right. Of course, this is not quite true. In a `matrix` environment, `\hfill 27` would force the number 27 to be set flush right (see Section 5.8.4).

If the argument of `\begin{array}` is missing, as in

```
\begin{equation}
   \begin{array}
      a + b + c & uv      & x - y & 27\\
      a + b     & u + v   & z     & 134
   \end{array}
\end{equation}
```

LaTeX generates the error message

```
! Package array Error:  Illegal pream-token (a): `c' used.
```

If you change the first entry of the matrix to `c + b + a`, then the error message is

```
! Extra alignment tab has been changed to \cr.
<recently read> \endtemplate

l.5       c + b + a &
                      uv      & x - y & 27\\
```

Note that the first character in `c + b + a` is not an

```
Illegal character in array arg.
```

because `c` is one possible argument of `\begin{array}`.

If the closing brace of the argument of `\begin{array}` is missing, as in

```
\begin{equation}
   \begin{array}{cccc
      a + b + c & uv    & x - y & 27\\
      a + b     & u + v & z     & 134
   \end{array}
\end{equation}
```

you get the error message

```
Runaway argument?
{cccc a + b + c & uv    & x - y & 27\\ a + b
                        & u + v \ETC.
! Paragraph ended before \@array was complete.
```

In fact, the argument of `array` can be more complex than stated in the rule. Indeed, the `array` subsidiary math environment can take any argument that the `tabular` environment can take (see Section 6.6). For instance, here is a matrix with headers:

	a	b	c
1	1	1	1
2	1	-1	-1
2	2	1	0

typed as

```
\[
\begin{array}{r|rrr}
  & a & b & c \\
\hline
1 & 1 &  1 &  1 \\
2 & 1 & -1 & -1 \\
2 & 2 &  1 &  0
\end{array}
\]
```

In Section 9.7.1 we have the `matrix` example:

$$a = \begin{pmatrix} (a_{11}) & \\ \cdots & \mathbf{0} \\ (a_{n1}) & \end{pmatrix}$$

If rows are spanned, we need to use `array` instead of `matrix`:

$$\left[\begin{array}{cc} a & b \\ c & d \\ \mathbf{0} & \end{array}\right.\kern-\arraycolsep\left.\begin{array}{cc} & \mathbf{0} \\ m & n \\ k & l \end{array}\right]$$

typed as (the `\BigZero` command is defined on page 234)

```
\left[ \hspace{-\arraycolsep}
% spacing is automatic with matrix but not with array
\begin{array}{cccc}
a & b &\multicolumn{2}{c}{}\\
c & d &\multicolumn{2}{c}
                  {\raisebox{1.5ex}[0pt]{\BigZero}}\\
\multicolumn{2}{c}{}& m & n \\
\multicolumn{2}{c}
              {\raisebox{1.5ex}[0pt]{\BigZero}}& k & l
\end{array}
\hspace{-\arraycolsep} \right]
\end{equation*}
```

9.7.3 Cases

The `cases` environment is also a subsidiary math environment. Here is the example from Section 3.4.3 and the introduction to this section:

$$f(x) = \begin{cases} -x^2, & \text{if } x < 0; \\ \alpha + x, & \text{if } 0 \leq x \leq 1; \\ x^2, & \text{otherwise.} \end{cases}$$

It is typed as

```
\begin{equation}
   f(x)=
   \begin{cases}
      -x^{2},       &\text{if $x < 0$;}\\
      \alpha + x,   &\text{if $0 \leq x \leq 1$;}\\
      x^{2},        &\text{otherwise.}
   \end{cases}
\end{equation}
```

It would be easy to code the `cases` environment as a special case of the `array` subsidiary math environment:

```
\begin{equation}
   f(x) =
  \left\{
   \begin{array}{ll}
      -x^{2},      &\text{if $x < 0$;}\\
     \alpha + x,   &\text{if $0 \leq x \leq 1$;}\\
      x^{2},       &\text{otherwise.}
   \end{array}
   \right.
\end{equation}
```

or of the `alignedat` subsidiary math environment:

```
\begin{equation*}
   f(x) =
   \left\{
   \begin{alignedat}{2}
     &-x^{2},      &&\quad\text{if $x < 0$;}\\
     &\alpha + x,  &&\quad\text{if $0 \leq x \leq 1$;}\\
     &x^{2},       &&\quad\text{otherwise.}
     \end{alignedat}
   \right.
\end{equation*}
```

9.8 Commutative diagrams

The `amscd` package provides the `CD` subsidiary math environment for typesetting simple commutative diagrams. To use it, make sure that the command

```
\usepackage{amscd}
```

is in the preamble of the document.

For instance, to obtain

$$\begin{array}{ccc} A & \longrightarrow & B \\ \big\downarrow & & \big\downarrow \\ C & = & D \end{array}$$

type

```
\[
   \begin{CD}
      A        @>>>       B\\
      @VVV                @VVV\\
      C        @=         D
   \end{CD}
\]
```

A commutative diagram is a matrix made up of two kinds of rows, *horizontal rows,* that is, rows with horizontal arrows; and *vertical rows,* rows with vertical arrows. For example,

```
A        @>>>      B
```

is a typical horizontal row. It defines two columns and a connecting horizontal arrow `@>>>`. There may also be more than two columns, as in

```
A  @>>>  B  @>>>  C  @=  D  @<<<  E  @<<<  F
```

The connecting pieces can be:

- Stretchable right arrows, `@>>>`
- Stretchable left arrows, `@<<<`
- Stretchable equal signs, `@=`
- Blanks, `@.`

The label above a stretchable arrow should be typed between the first and second `>` or `<` symbols, whereas the label below should be typed between the second and third `>` or `<` symbols. You can have both.

The following is a typical vertical row containing vertical arrows:

```
@VVV        @VVV        @AAA
```

The vertical pieces could be

- Stretchable down arrows, `@VVV`
- Stretchable up arrows, `@AAA`
- Double vertical lines, `@|` or `@\vert`
- Blanks, `@.`

The vertical arrows are placed starting with the first column.

The label to the left of a stretchable vertical arrow should be typed between the first and second `V` or `A`, whereas the label on the right should be typed between the second and third `V` or `A` symbols. You can have both.

These constructs are illustrated in

$$\begin{array}{ccccc} \mathbb{C} & \xrightarrow{H_1} & \mathbb{C} & \xrightarrow{H_2} & \mathbb{C} \\ \Big\downarrow{\scriptstyle P_{c,3}} & & \Big\downarrow{\scriptstyle P_{\bar{c},3}} & & \Big\downarrow{\scriptstyle P_{-c,3}} \\ \mathbb{C} & \xrightarrow{H_1} & \mathbb{C} & \xrightarrow{H_2} & \mathbb{C} \end{array}$$

typed as

```
\[
   \begin{CD}
    \mathbb{C} @>H_{1}>> \mathbb{C} @>H_{2}>>\mathbb{C}\\
    @VP_{c,3}VV  @VP_{\bar{c},3}VV  @VVP_{-c,3}V\\
    \mathbb{C} @>H_{1}>> \mathbb{C} @>H_{2}>> \mathbb{C}
   \end{CD}
\]
```

Here is another example utilizing the `\text` command, followed by its source:

$$\begin{array}{ccccccccc} A & \xrightarrow{\log} & B & \xrightarrow[\text{bottom}]{} & C & = & D & \longleftarrow & E & \longleftarrow & F \\ \Big\downarrow{\scriptstyle \text{one-one}} & & & & \Big\uparrow{\scriptstyle \text{onto}} & & \Big\| & & & & \\ X & = & Y & \longrightarrow & Z & \longrightarrow & U & & & & \\ \beta\Big\uparrow & & \Big\uparrow\gamma & & \Big\downarrow & & \Big\downarrow & & & & \\ D & \xrightarrow{\alpha} & E & \longrightarrow & H & & I & & & & \end{array}$$

```
\[
   \begin{CD}
      A     @>\log>>   B     @>>\text{bottom}>   C
            @=         D     @<<<                E
            @<<<       F\\
      @V\text{one-one}VV   @.     @AA\text{onto}A   @|\\
      X       @=           Y     @>>>              Z
              @>>>         U\\
      @A\beta AA           @AA\gamma A    @VVV   @VVV\\
      D       @>\alpha>>   E              @>>>   H
              @.           I\\
   \end{CD}
\]
```

Diagrams requiring more advanced commands should be done with a drawing (or drafting) application or with specialized packages. The AMS recommends Kristoffer H. Rose and Ross Moore's `xy-pic` package (see Section E.1).

9.9 Adjusting the display

By default, the math environments described in this chapter do not allow page breaks. While a page break in a `cases` environment is obviously not desirable, it may be acceptable in an `align` or `gather` environment. You can allow page breaks by using the

```
\allowdisplaybreaks
```

command. It allows page breaks in a multiline math environment within its scope. For instance,

```
{\allowdisplaybreaks
\begin{align}\label{E:mm13}
   a &= b + c,\\
   d &= e + f,\\
   x &= y + z,\\
   u &= v + w.
\end{align}
}% end of \allowdisplaybreaks
```

allows a page break after any one of the first three lines.

Within the scope of an `\allowdisplaybreaks` command, use the `\\*` command to prohibit a break after that line. The line separators `\\` and `\\*` can use an optional argument to add some additional interline space (see Section 5.7.2).

Just before the line separator command (`\\`), include a `\displaybreak` command to force a break, or a

`\displaybreak[0]`

command to allow one. `\displaybreak[`*n*`]`, where *n* is `1`, `2`, or `3`, specifies the intermediate steps between allowing and forcing a break. `\displaybreak[4]` is the same as `\displaybreak`. You can easily visualize these rules:

allow display break =
`\displaybreak[0]` `\displaybreak[1]` ... `\displaybreak[4]`
= `\displaybreak`
= force display break

Note the similarity between the `displaybreak` sequence and the `pagebreak` sequence in Section 5.7.3.

If you want to allow page breaks in all multiline math environments in your document, place the `\allowdisplaybreaks[1]` command in the preamble of your document. The optional argument can be varied from `1` to `4`, in order of increasing permissiveness.

Note that none of the subsidiary math environments are affected by any variant of the `\displaybreak` or the `\allowdisplaybreaks` commands.

CHAPTER

10

LaTeX documents

In this chapter, we take up the organization of shorter documents. Longer documents and books are discussed in Part VI.

If you are writing a *simple article,* start with a template (see Sections 4.2 and 11.4), then you can safely ignore much of the material discussed in this chapter. In more complicated articles you may need the material discussed in this chapter.

Section 10.1 discusses document structure in general, Section 10.2 presents the preamble. Section 10.3 discusses the top matter, in particular, the `abstract` environment. Section 10.4 presents the main matter, including sectioning, cross-referencing, tables, and figures. Section 10.5 covers the back matter, including the bibliography and index.

In Section 10.1–10.5 we discuss the logical design of a LaTeX document. The visual design is largely left to the document class. In Section 10.6, however, we briefly discuss one frequently adjusted aspect of visual design, the page style.

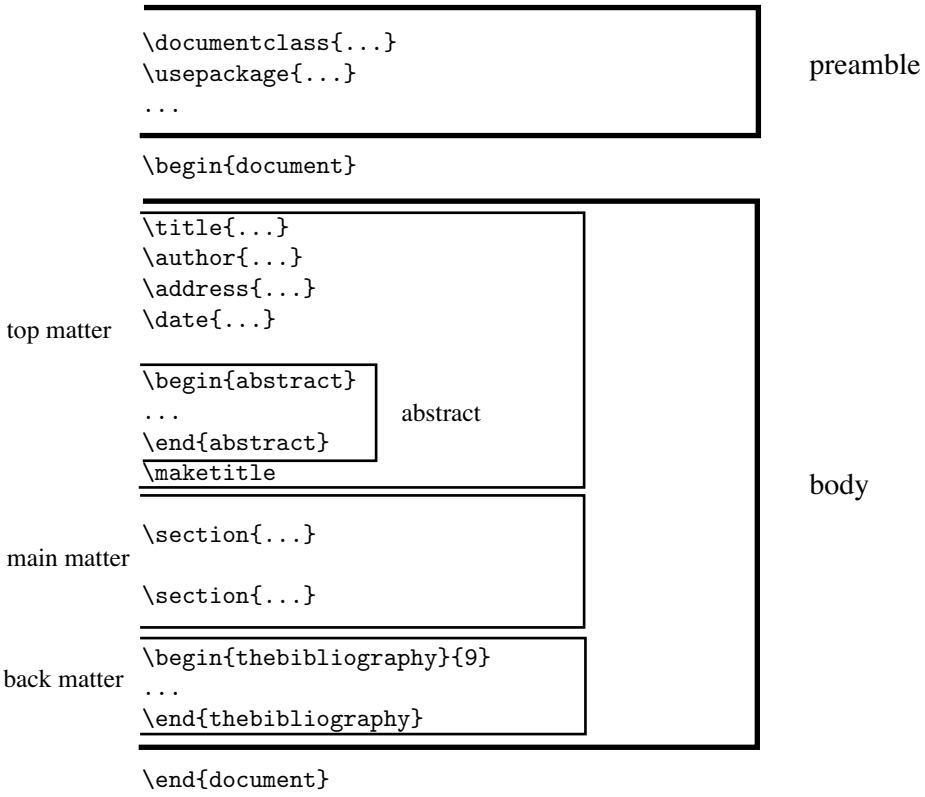

Figure 10.1: The structure of a LaTeX document.

10.1 The structure of a document

The source file of a LaTeX document is divided into two main parts: the preamble and the body (see Figure 10.1).

Preamble This is the portion of the source file before the

```
\begin{document}
```

command. It contains definitions and instructions that affect the entire document.

Body This is the content of the `document` environment. It contains all the material to be typeset.

These statements oversimplify the situation somewhat. For instance, you can define a command in the preamble to typeset some text that will appear wherever the command is used in the body, but the text is actually typed in the preamble. Nevertheless, I hope the division between the preamble and the body is clear.

The body is divided into three parts:

Top matter This is the first part of the body. It is concluded with the `\maketitle` command. Traditionally it included only the `\title`, the `\author`, and the `\date` commands. The top matter is derived from these commands and from it the title page of an article was designed. This evolved to include a lot more information about the author(s), for instance, their e-mail addresses, academic affiliations, home pages, and about the article, for instance, research support, subject classification. The typeset top matter now is split into several locations, the top and bottom of the first page and the bottom of the last page. See pages 286 and 288 for an example and Section 18.1.2 for more components that can be used in longer documents and books.

Main matter This is the main part of the document, including any appendices.

Back matter This is the material that is typeset at the end of the document. For a typical shorter document, the back matter is just the bibliography. See Section 18.1.2 for more information about additional components—such as the index—that are often used in longer documents and books.

10.2 The preamble

You were introduced to the preamble of a document in Section 4.1. Recall that the preamble contains the crucial `\documentclass` line, specifying the document class and the options that modify its behavior. For instance,

```
\documentclass[draft,reqno]{amsart}
```

loads the document class `amsart` with the `draft` option, which paints a slug in the margin indicating lines that are too wide (see Section 5.7.1), and the `reqno` option, which places the equation numbers on the right (see Section 11.5).

`article` is the most popular legacy document class (see Section 12.1). The command

```
\documentclass[titlepage,twoside]{article}
```

loads the document class `article` with the `titlepage` option, which creates a separate title page and places the abstract on a separate page, and the `twoside` option, which formats the typeset article for printing on both sides of the paper.

The `\documentclass` command is usually followed by the `\usepackage` commands, which load LaTeX enhancements called *packages*. For instance,

```
\usepackage{latexsym}
```

loads a package that defines some additional LaTeX symbol names (see Section 12.3), whereas

```
\usepackage[demo]{graphicx}
```

loads the `graphicx` package (see Section 10.4.3) with the `demo` option that inserts rectangles in place of the illustrations. Document class options are also passed on to the packages as possible options, so

```
\documentclass[demo]{amsart}
\usepackage{graphicx}
```

would also load the `graphicx` package with the `demo` option unless it is invoked with

```
\usepackage[final]{graphicx}
```

Any document class options that are not relevant for a package are ignored.

`\usepackage` commands can also be combined:

```
\usepackage{amssymb,latexsym}
```

is the same as

```
\usepackage{amssymb}
\usepackage{latexsym}
```

Document class files have a `cls` extension, whereas package files are designated by the `sty` extension. The document class `amsart` is defined in the `amsart.cls` file, the `graphicx` package is defined in the `graphicx.sty` file. You may define your own packages, such as the `newlattice` package described in Section 15.3.

The preamble normally contains any user-defined commands (see Chapter 15) and the proclamation definitions (see Section 6.4). Some commands can only be in the preamble. `\DeclareMathOperator` is such a command (see Section 7.6.2) and so is `\numberwithin` (see Section 7.3). If you put such a command in the body, for example, `\DeclareMathOperator`, you get an error message:

```
! LaTeX Error: Can be used only in preamble.
l.103 \DeclareMathOperator
```

There is one command that may only be placed *before* the

```
\documentclass{...}
```

line:

```
\NeedsTeXFormat{LaTeX2e}[2005/12/01]
```

This command checks the version of LaTeX being used to typeset the document and issues a warning if it is older than December 1, 2005 or whatever date you specified. Use this optional date argument if your document contains a feature that was introduced on or after the date specified or if an earlier version had a bug that would materially affect the typesetting of your document.

For instance, if you use the `\textsubscript` command, introduced in the December 1, 2005 release (see page 311), then you may use the `\NeedsTeXFormat` line shown above. LaTeX now hardly changes from year to year, so this command is rarely used except in document class files or package files. See, however, the discussion on page 311.

10.3 Top matter

The top matter of an article is part of the article body and, as a rule, it contains the material used to create the "title page" and, optionally, an abstract.

Discussion of the top matter should take place in the context of a particular document class. We discuss the top matter of the `amsart` document class in Section 4.2, and we continue discussing it in much more detail in Section 11.2. The top matter of the `article` document class is covered in Section 12.1.1.

Long documents, such as books, have rather complicated top matter such as tables of contents (see Chapter 18). In this section, we only discuss the abstract.

10.3.1 Abstract

Most standard document classes, except those for letters and books, make provision for an abstract, typed in an `abstract` environment.

The document class formats the heading as ABSTRACT, or some variant, and, as a rule, typesets the text of the abstract in smaller type with wider margins.

The `amsart` document class requires that you place the abstract environment *before* the `\maketitle` command (see Figure 10.1). See the abstract in the sample article `intrart.tex` on page 37. If you forget to place it there, you get the warning

```
Class amsart Warning:
             Abstract should precede \maketitle in AMS
documentclasses; reported on input line 21.
```

and the abstract is typeset wherever the `abstract` environment happens to be placed.

In the `article` document class you place the abstract *after* the `\maketitle` command. If you place the abstract before the `\maketitle` command, the abstract is placed on page 1, and the article starts on page 2.

If the abstract and the "footnotes" from the top matter fill the first page, the second page has no running head. To fix this, follow the `\maketitle` command with the `\clearpage` command (see Section 5.7.3).

10.4 Main matter

The main matter contains most of the essential parts of the document, including the appendices.

We discuss now how to structure the main matter. We describe sectioning in Section 10.4.1, cross-referencing in Section 10.4.2, and tables and figures in Section 10.4.3.

10.4.1 Sectioning

The main matter of a typical shorter document is divided into *sections*. See Section 18.1.1 for a discussion on sectioning longer documents.

Sections

LaTeX is instructed to start a section with the `\section` command, which takes the title of the section as its argument. This argument may also be used for the running head and it is also placed in the table of contents (see Section 18.2), which means that you need to protect fragile commands with the `\protect` command (see Section 5.3.3). LaTeX automatically assigns a section number and typesets the section number followed by the section title.

Any `\section` command may be followed by a `\label` command, so that you can refer to the section number generated by LaTeX, as in

```
\section{Introduction}\label{S:intro}
```

The command `\ref{S:intro}` refers to the number of the section and the command `\pageref{S:intro}` refers to the number of the typeset page where the section title appears.

Other sectioning commands

A section may be subdivided into *subsections,* which may themselves be divided into *subsubsections, paragraphs,* and *subparagraphs.* Subsections are numbered within a section (in Section 1, they are numbered 1.1, 1.2, and so on). Here is the whole hierarchy:

```
\section
   \subsection
      \subsubsection
         \paragraph
            \subparagraph
```

It is important to understand that the five levels of sectioning are not just five different styles for typesetting section headers but they form a hierarchy. You should never have a subsection outside a section, a subsubsection outside a subsection, and so on. For instance, if the first sectioning command in your document is `\subsection`, the subsections are numbered 0.1, 0.2, ... Or if in the first section of your document

the first sectioning command is `\subsubsection`, the subsubsections are numbered 1.0.1, 1.0.2, ... Both are clearly undesirable.

There are two additional sectioning commands provided by the `report` and by the book document classes (`book` and `amsbook`): `\chapter` and `\part` (see Section 18.1.1).

Any sectioning command may be followed by a `\label` command so that you can refer to the number (if any) generated by LaTeX and the page on which it appears (see Section 10.4.2).

There is also the seldom used top level `\specialsection` command. Articles do not have parts and chapters, but sometimes a long article may require further division using the `\specialsection` command.

The form of sectioning commands

All sectioning commands take one of the following three forms, illustrated below with the `\section` command:

Form 1 The simplest form is

`\section{`*`title`*`}`

where *`title`* is the section title, of course. You need to protect any fragile commands in *`title`* with the `\protect` command (see Section 5.3.3).

Form 2 The sectioning command may have an optional argument

`\section[`*`short_title`*`]{`*`title`*`}`

The optional *`short_title`* argument is used in the running head. See Section 18.2 on what goes into the table of contents. Protect any fragile commands in *`short_title`* with the `\protect` command (see Section 5.3.3).

Form 3 Finally, we consider the `*`-ed version

`\section*{`*`title`*`}`

There are no section numbers printed and the *`title`* is not included in the running head. Remember that if you `*` a section, all subsections, and so on, must also be `*`-ed to avoid having strange section numbers.

Sectioning commands typeset

Consider the following text:

```
\section{Introduction}\label{S:Intro}
We shall discuss the main contributors of this era.
\subsection{Birkhoff's contributions}\label{SS:contrib}
```

```
\subsubsection{The years 1935--1945}\label{SSS:1935}
Going to Oxford was a major step.
\paragraph{The first paper}
What should be the definition of a universal algebra?
\subparagraph{The idea}
One should read Whitehead very carefully.
```

This is how it looks typeset in the `amsart` document class:

1 Introduction

We shall discuss the main contributors of this era.

1.1 Birkhoff's contributions

1.1.1 The years 1935–1945

Going to Oxford was a major step.

The first paper What should be the definition of a universal algebra?

The idea One should read Whitehead very carefully.

Notice that paragraphs and subparagraphs are not displayed prominently by the AMS.

By contrast, look at the same text typeset in the legacy `article` document class:

1. Introduction

We shall discuss the main contributors of this era.

1.1. **Birkhoff's contributions.**

1.1.1. *The years 1935–1945.* Going to Oxford was a major step.
The first paper. What should be the definition of a universal algebra?
The idea. One should read Whitehead very carefully.

This illustrates vividly one huge difference between the two document classes, the visual handling of sectioning.

Section 15.5.1 discusses how you can change the format of the section numbers, and how to specify which sectioning levels are to be numbered.

Section 2.2 of *The LaTeX Companion,* 2nd edition [46] explains how to change the layout of section headings, especially useful for document class designers.

Appendix

In the main matter, if the article contains appendices, mark the beginning of the appendices with the `\appendix` command. After the `\appendix` command, the `\section` command starts the appendices (for books, see Section 18.1.2):

```
\appendix
\section{A proof of the Main Theorem}\label{S:geom}
```

This produces `Appendix A` with the given title, typeset just like a section.

Note that appendices may be labeled and cross-referenced like any other section. In an appendix, subsections are numbered A.1, A.2, and so on, subsubsections within A.1 are numbered A.1.1, A.1.2, and so on.

Let me repeat, `\appendix` is not like `\section`. It is not a command with an argument. Appendices are named by arguments of the `\section`—or for books, `\chapter`—commands placed after the `\appendix` command.

10.4.2 Cross-referencing

There are three types of cross-referencing available in LaTeX:

1. Symbolic referencing with `\ref` and `\eqref` for equations
2. Page referencing with `\pageref`
3. Bibliographic referencing with `\cite`

In this section, we discuss the first two, while bibliographies are discussed in Section 10.5.1 and in Chapter 16.

Symbolic referencing

Wherever LaTeX can automatically generate a number in your document, you can place a `\label` command

`\label{`*`symbol`*`}`

Then, at any place in your document, you can use the `\ref` command

`\ref{`*`symbol`*`}`

to place that number in the document. We call *`symbol`* the *label.*

You can use labels for sectioning units, equations, figures, tables, items in an enumerated list environment (see Section 6.2.1), as well as for theorems and other proclamations.

If the equation labeled `E:int` is the fifth equation in an article, then LaTeX stores the number `5` for the label `E:int`, so `\ref{E:int}` produces the number 5. If equations are numbered within sections (see Section 7.3), and an equation is the third equation in Section 2, then LaTeX stores the number `2.3` for the label `E:int`, so the reference `\ref{E:int}` produces the number 2.3.

Example 1 The present section starts with the command

```
\section{Main matter}\label{S:MainMatter}
```

So `\ref{S:MainMatter}` produces the number 10.4 and we get the number of the typeset page where the section title appears with `\pageref{S:MainMatter}`, which is 251.

Example 2

```
\begin{equation}\label{E:int}
   \int_{0}^{\pi} \sin x \, dx = 2.
\end{equation}
```

In this case, `\ref{E:int}` produces the number of the equation, `\eqref{E:int}` produces the number of the equation in parentheses.

Tip If you have to reference an equation in the statement of a theorem, always use `\eqref`. Do not use `\eqref` to reference anything but proclamations. (See the `\itemref` command introduced in Section 15.1.2.)

Example 3

```
\begin{theorem}\label{T:fund}
   Statement of theorem.
\end{theorem}
```

The reference `\ref{T:fund}` produces the number of the theorem.

Tip Typeset a document twice to see a change in a cross-reference.

See Section D.3.4 for a discussion of how LaTeX stores these numbers and why you have to typeset twice. If you typeset only once, and LaTeX suspects that the cross-references have not been updated, you get a warning:

```
 LaTeX Warning: Label(s) may have changed.
Rerun to get cross-references right.
```

Rule 1 ■ `\label` **command**
The argument of the `\label` command is a string of letters, punctuation marks, and digits. It is case sensitive, so `S:intro` is different from `S:Intro`.

Rule 2 ■ `\label` **command**
Place a `\label` command immediately after the command that generates the number.

The following is not compulsory but advisable.

Tip When referencing:

```
see Section~\ref{S:Intro} proved in Theorem~\ref{T:main}
```

or

```
see Sections~\ref{S:Intro} and~\ref{S:main}
```

use ties (`~`).

It is difficult to overemphasize how useful automatic cross-referencing can be when writing a document.

Tip Make your labels meaningful to yourself, so they are easy to remember. Systematize your labels. For example, start the label for a section with `S:`, theorem with `T:`, lemma with `L:`, and so on.

When you are cross-referencing, even if you follow these tips, it may not be easy to remember a label. David Carlisle's `showkeys` package may help you out. It is part of the tools distribution (see Section 12.3.1 and Section E.1). Include the line

```
\usepackage{showkeys}
```

in the preamble of your document. The `showkeys` package shows all symbolic references in the margin of the typeset document. With the `notcite` option, my preference,

```
\usepackage[notcite]{showkeys}
```

`showkeys` does not show the labels for bibliographic references. When the document is ready for final typesetting, then comment out this line.

Section 2.4 of *The LaTeX Companion,* 2nd edition [46] describes `varioref`, a package which extends the power of `\ref`, and `xr`, a package for referencing external documents.

Page referencing

The command

`\pageref{`*`symbol`*`}`

produces the number of the typeset page corresponding to the location of the command `\label{`*`symbol`*`}`. For example, if the following text is typeset on page 5,

```
There may be three types of problems with the
construction of such lattices.\label{problem}
```

and you type

```
Because of the problems associated with
the construction (see page~\pageref{problem})
```

anywhere in the document, LaTeX produces

Because of the problems associated with the construction (see page 5)

Because of the way LaTeX typesets a page, page references may be off by one. See the discussion in Section 18.6 on how to guarantee that the page number is correct.

10.4.3 Floating tables and illustrations

Many documents contain tables and illustrations. These must be treated in a special way since they cannot be broken across pages. If necessary, LaTeX moves—floats—a table or an illustration to the top or bottom of the current or the next page if possible and further away if not.

LaTeX provides the `table` and the `figure` environments for typesetting floats. The two are essentially identical except that the `figure` environments are named Figure 1, Figure 2, and so on, whereas the `table` environments are numbered as Table 1, Table 2, and so on.

Tables

A `table` environment is set up as follows:

```
\begin{table}
    Place the table here
   \caption{title}\label{Ta:xxx}
\end{table}
```

The `\caption` command is optional and may also precede the table. The optional `\label` command must be placed between the command `\caption` and the command `\end{table}`. The label is used to reference the table's number. A `table` environment can have more than one table, each with its own caption.

The `table` environment is primarily used for tables made with the `tabular` or similar environments (see Section 6.6). There are many examples of tables in this book, for instance, Section 5.4 has four.

If your document uses the `twocolumn` document class option, the `table` environment produces tables that span only one column and the `table*` environment produces tables that span both columns. Such tables can be placed only at the top of a page.

Figures

Illustrations, also called *graphics* or *figures*, include drawings, scanned images, digitized photos, and so on. These can be inserted with a `figure` environment:

```
\begin{figure}
    Place the graphics here
   \caption{title}\label{Fi:xxx}
\end{figure}
```

The above discussion of captions and labels for tables also applies to figures. Like the `table` environment, if your document uses the `twocolumn` document class option, the `figure` environment produces figures that span only one column, but the `figure*` environment produces figures that span both columns. However, these figures can be placed only at the top of a page.

The standard way of including a graphics file is with the commands provided by the `graphicx` package by David Carlisle and Sebastian Rahtz, which is part of the LaTeX distribution (see Section 12.3). Save your graphics in EPS (Encapsulated PostScript) or PDF (Portable Document Format) format. Your graphics can also be made within a `picture` environment, an approach that is neither encouraged nor discussed in this book.

Using the `graphicx` package, a typical `figure` is specified as follows:

```
\begin{figure}
   \centering\includegraphics{file}
   \caption{title}\label{Fi:xxx}
\end{figure}
```

The illustration `circle.eps` is included with the command

```
\includegraphics{circle}
```

without the extension! LaTeX and the `graphicx` package assumes the `eps` extension. On the other hand, versions of LaTeX that produce a typeset file in PDF format assume the `pdf` extension.

If you have to scale the graphics image, say to 68% of its original size, use the command

```
\includegraphics[scale=.68]{file}
```

For instance, the figure on page 526 is included with the commands

```
\begin{figure}
   \centering\includegraphics[scale=.8]{StrucLaT}
   \caption{The structure of \protect\LaTeX.}
   \label{Fi:StrucLaT}
\end{figure}
```

Float control

The `table` and `figure` environments may have an optional argument, with which you can influence LaTeX's placement of the typeset table. The optional argument consists of one to four letters:

- `b`, the bottom of the page
- `h`, here (where the environment appears in the text)
- `t`, the top of the page
- `p`, a separate page

For instance,

```
\begin{table}[ht]
```

requests LaTeX to place the table "here" or at the "top" of a page. The default is `[tbp]` and the order of the optional arguments is immaterial, for example, `[th]` is the same as `[ht]`. If `h` is specified, it takes precedence, followed by `t` and `b`.

LaTeX has more than a dozen internal parameters that control a complicated algorithm that determines the placement of tables and figures. If you want to override these parameters *for one table or figure only,* add an exclamation mark (`!`) to the optional argument. For instance, `[!h]` requests that this table or figure be placed where it is in the source file even if this placement violates the rules as set by some of the parameters. For a detailed discussion of the float mechanism, see Chapter 6 of *The LaTeX Companion,* 2nd edition [46].

The `\suppressfloats` command stops LaTeX from placing any more tables or figures on the page it appears on. An optional argument `t` or `b` (but not both) prohibits placement of floats at the top or bottom of the current page. The table or figure that is *suppressed* appears on the next page or later in the document, if necessary.

Your demands and LaTeX's float mechanism may conflict with one another with the result that LaTeX may not place material where you want it. The default values

of the float placement parameters are good only for documents with a small number of floating objects. Combining two tables or illustrations into one sometimes helps. The `\clearpage` command not only starts a new page with the `\newpage` command, but also forces LaTeX to print all the tables and figures it has accumulated but not yet placed in the typeset document. See also some related commands discussed in Section 5.7.3.

For more information on graphics, see Chapter 10 of *The LaTeX Companion,* 2nd edition [46] and Chapter 2 of *The LaTeX Graphics Companion* [17]. See also the documentation for the `graphicx` package in the LaTeX distribution (see Section 12.3).

10.5 Back matter

The back matter of an article is very simple, as a rule. It is either empty or consists of only a bibliography. A long document, such as a book, may have more complicated back matter (see Chapter 18). In this section, we discuss only the *bibliography* and a very simple *index*.

10.5.1 Bibliographies in articles

The simplest way to typeset a bibliography is to type it directly into the article. For an example, see the bibliography in the `intrart.tex` article (on page 43). This sample bibliography contains two examples, one short and one long, of each of the seven most frequently used kinds of items.

You type the text of a bibliography in a `thebibliography` environment, as shown in the following examples.

```
\begin{thebibliography}{99}
\bibitem{hA70}
   Henry~H. Albert,
   \emph{Free torsoids},
   Current trends in lattice theory.
   D.~Van Nostrand, 1970.
\bibitem{hA70a}
   Henry~H. Albert,
   \emph{Free torsoids},
   Current trends in lattice theory
   (G.\,H. Birnbaum, ed.).
   vol.~7, D.~Van Nostrand, Princeton, January, 1970,
   no translation available, pp.~173--215 (German).
\bibitem{sF90}
   Soo-Key Foo,
   \emph{Lattice Constructions},
   Ph.D. thesis, University of Winnebago, 1990.
```

```
\bibitem{sF90a}
   Soo-Key Foo,
   \emph{Lattice Constructions},
   Ph.D. thesis, University of Winnebago, Winnebago, MN,
   December 1990, final revision not yet available.
\bibitem{gF86}
   Grant~H. Foster,
   \emph{Computational complexity in lattice theory},
   tech. report, Carnegie Mellon University, 1986.
\bibitem{gF86a}
   Grant~H. Foster,
   \emph{Computational complexity in lattice theory},
   Research Note 128A, Carnegie Mellon University,
   Pittsburgh, PA, December, 1986,
   research article in preparation.
\bibitem{pK69}
   Peter Konig,
   \emph{Composition of functions}.
   Proceedings of the Conference on Universal Algebra
   (Kingston, 1969).
\bibitem{pK69a}
   Peter Konig,
   \emph{Composition of functions}.
   Proceedings of the Conference on Universal Algebra
   (G.~H. Birnbaum, ed.).
   vol.~7, Canadian Mathematical Society,
   Queen's Univ., Kingston, ON,
   available from the Montreal office,
   pp.~1--106 (English).
\bibitem{wL75}
   William~A. Landau,
   \emph{Representations of complete lattices},
   Abstract: Notices Amer. Math. Soc. \textbf{18}, 937.
\bibitem{wL75a}
   William~A. Landau,
   \emph{Representations of complete lattices},
   Abstract: Notices Amer. Math. Soc. \textbf{18}, 937,
   December, 1975.
\bibitem{gM68}
   George~A. Menuhin,
   \emph{Universal algebra}.
   D.~Van Nostrand, Princeton, 1968.
```

```
\bibitem{gM68a}
   George~A. Menuhin,
   \emph{Universal algebra}. 2nd ed.,
   University Series in Higher Mathematics, vol.~58,
   D.~Van Nostrand, Princeton,
   March, 1968 (English), no Russian translation.
\bibitem{eM57}
   Ernest~T. Moynahan,
   \emph{On a problem of M. Stone},
   Acta Math. Acad. Sci. Hungar.
   \textbf{8}~(1957), 455--460.
\bibitem{eM57a}
   Ernest~T. Moynahan,
   \emph{On a problem of M. Stone},
   Acta Math. Acad. Sci. Hungar.
   \textbf{8}~(1957), 455--460
   (English), Russian translation available.
\end{thebibliography}
```

Figure 10.2 shows a typeset version of this bibliography in the `amsart` document class.

By contrast, look at the same bibliography typeset in the legacy `article` document class in Figure 10.3.

You can find these entries in the document `inbibl.tpl` in the `samples` folder (see page 4).

I use the convention that the label for a `\bibitem` consists of the initials of the author and the year of publication. The first cited publication by Andrew B. Reich in 1987 would have the label `aR87` and the second, `aR87a`. Of course, you can use any label you choose, but such conventions make the items easier to reuse.

The `thebibliography` environment takes an argument—in the previous example, this argument is `99`—telling LaTeX that the widest reference number it must generate is two digits wide. For fewer than 10 items, use `9` and for 100 or more items, use `999`.

If the argument of `\begin{thebibliography}` is missing, you get the error message

```
! LaTeX Error: Something's wrong--perhaps
                                   a missing \item.
```

Each bibliographic item is introduced with `\bibitem`, which is used like the `\label` command. In your text, use `\cite`, in a similar way to `\eqref`—it provides the number enclosed in brackets. So if the 13th bibliographic item is introduced with

```
\bibitem{eM57}
```

then

```
\cite{eM57}
```

refers to that item and typesets it as [13]. The bibliography of the article itself is automatically numbered by LaTeX. It is up to the author to make sure that the listing of the bibliographic items is in the proper order.

Tip Do not leave spaces in a `\cite` command. For example, `\cite{eM57␣}` produces [?] indicating an unknown reference.

You can use `\cite` to cite two or more items in the form

```
\cite{hA70,eM57}
```

which typesets as [1, 13]. There is also an optional argument for `\cite` to specify additional information. For example,

References

[1] Henry H. Albert, *Free torsoids*, Current trends in lattice theory. D. Van Nostrand, 1970.

[2] Henry H. Albert, *Free torsoids*, Current trends in lattice theory (G. H. Birnbaum, ed.). vol. 7, D. Van Nostrand, Princeton, January, 1970, no translation available, pp. 173–215 (German).

[3] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, 1990.

[4] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990, final revision not yet available.

[5] Grant H. Foster, *Computational complexity in lattice theory*, tech. report, Carnegie Mellon University, 1986.

[6] Grant H. Foster, *Computational complexity in lattice theory*, Research Note 128A, Carnegie Mellon University, Pittsburgh, PA, December, 1986, research article in preparation.

[7] Peter Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra (Kingston, 1969).

[8] Peter Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra (G. H. Birnbaum, ed.). vol. 7, Canadian Mathematical Society, Queen's Univ., Kingston, ON, available from the Montreal office, pp. 1–106 (English).

[9] William A. Landau, *Representations of complete lattices*, Abstract: Notices Amer. Math. Soc. **18**, 937.

[10] William A. Landau, *Representations of complete lattices*, Abstract: Notices Amer. Math. Soc. **18**, 937, December, 1975.

[11] George A. Menuhin, *Universal algebra*. D. Van Nostrand, Princeton, 1968.

[12] George A. Menuhin, *Universal algebra*. 2nd ed., University Series in Higher Mathematics, vol. 58, D. Van Nostrand, Princeton, March, 1968 (English), no Russian translation.

[13] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

[14] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460 (English), Russian translation available.

Figure 10.2: The most important bibliographic entry types.

References

[1] Henry H. Albert, *Free torsoids*, Current trends in lattice theory, D. Van Nostrand, 1970.

[2] Henry H. Albert, *Free torsoids*, Current trends in lattice theory (G. H. Birnbaum, ed.), vol. 7, D. Van Nostrand, Princeton, January, 1970, no translation available, pp. 173–215 (German).

[3] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, 1990.

[4] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990, final revision not yet available.

[5] Grant H. Foster, *Computational complexity in lattice theory*, tech. report, Carnegie Mellon University, 1986.

[6] Grant H. Foster, *Computational complexity in lattice theory*, Research Note 128A, Carnegie Mellon University, Pittsburgh, PA, December, 1986, research article in preparation.

[7] Peter Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra (Kingston, 1969).

[8] Peter Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra (G. H. Birnbaum, ed.), vol. 7, Canadian Mathematical Society, Queen's Univ., Kingston, ON, available from the Montreal office, pp. 1–106 (English).

[9] William A. Landau, *Representations of complete lattices*, Abstract: Notices Amer. Math. Soc., **18**, 937.

[10] William A. Landau, *Representations of complete lattices*, Abstract: Notices Amer. Math. Soc. **18**, 937, December, 1975.

[11] George A. Menuhin, *Universal algebra*. D. van Nostrand, Princeton, 1968.

[12] George A. Menuhin, *Universal algebra*. Second ed., University Series in Higher Mathematics, vol. 58, D. van Nostrand, Princeton, March, 1968 (English), no Russian translation.

[13] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

[14] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460 (English), Russian translation available.

Figure 10.3: Bibliography in the `article` document class.

```
\cite[pages~2--15]{eM57}
```

typesets as [13, pages 2–15].

If you wish to use labels rather than numbers to identify bibliographic items, then you can specify those labels with an optional argument of the `\bibitem` command:

[EM57] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

typed as

```
\bibitem[EM57]{eM57}
  Ernest~T. Moynahan, \emph{On a problem of M. Stone},
   Acta Math. Acad. Sci. Hungar.
   \textbf{8} (1957), 455--460.
```

If this optional argument of `\bibitem` is used, then the `\cite` command produces [EM57]. The argument of `\begin{thebibliography}` must be set wide enough to allow for such labels.

Rule ■ Label for a bibliographic item

A label cannot contain a comma or a space.

The examples I have used follow the formatting rules set by the AMS. Only titles are italicized, and only volume numbers of journals are set in boldface. You also have to watch the order in which the items are given, the punctuation, and the capitalization.

If an author appears repeatedly, use the `\bysame` command, which replaces the author's name with a long dash followed by a thin space. For example,

```
\bibitem{gF86}
   Grant~H. Foster,
   \emph{Computational complexity in lattice theory},
   tech. report, Carnegie Mellon University, 1986.
\bibitem{gF86a}
   \bysame,
   \emph{Computational complexity in lattice theory},
   Research Note 128A, Carnegie Mellon University,
   Pittsburgh PA, December 1986,
   research article in preparation.
```

See `sampart.tex` on page 293 for a typeset example.

Tip If you want a different title for your bibliography, say Bibliography, place the command

```
\renewcommand{\refname}{Bibliography}
```

anywhere before the `thebibliography` environment (see Section 15.1.6). If you use a legacy document class or `amsbook.cls`, use the line

```
\renewcommand{\bibname}{Bibliography}
```

Tip You may have more than one `thebibliography` environment in a document. Because each bibliography would number the entries from 1, you should provide labels as optional parameters of the `\bibitem` commands for cross-referencing.

10.5.2 Simple indexes

Using the `\label` and `\pageref` commands (see Section 10.4.2), it is quite simple to produce a small index in a `theindex` environment. At each point in the text that you want to reference in the index, place a `\label` command. The corresponding entry in the index typesets the page number with the `\pageref` command.

The `\item`, `\subitem`, and `\subsubitem` commands create an entry, subentry, and subsubentry, respectively. If you need additional vertical spacing when the first letter changes, for instance, between the "h" entries and the "i" entries, you can use the `\indexspace` command. Here are some examples of index entries:

```
\begin{theindex}
\item Lakser, H., \pageref{Lakser}
\item Lattice, \pageref{Lattice_intro},
               \textbf{\pageref{Lattice}}
   \subitem distributive, \pageref{Lattice_distributive}
   \subitem modular, \pageref{Lattice_distributive},
       \textbf{\pageref{Lattice_distributive2}}
\item Linear subspace, \pageref{Linear_subspace}
\end{theindex}
```

And here is the typeset index:

INDEX

Lakser, H., 2
Lattice, 14, **25**
  distributive, 18
  modular, 19, **37**
Linear subspace, 38

For a larger index, you should use the *MakeIndex* application (see Chapter 17).

10.6 Visual design

In this chapter, we have discussed the logical design of a LaTeX document. The visual design is largely left to the document class. But there is one small aspect of the visual design we have to discuss, the page style.

To get a visual representation of the page style of your document, use `layout` package of Kent McPherson (see Section 12.3.1). Load the package with

```
\usepackage{layout}
```

and place the `\layout` command somewhere in the body of your article. LaTeX produces a graphical representation of the page layout. Figure 10.4 shows the page layout for odd pages for the `amsart` document class with no options.

A typeset page has three parts, the *running head* or *header,* the *body*, and the *footer.* As a rule, the document class takes care of the contents and formatting of all three parts.

For the running head and footer, however, you can override the page design of the document class with the command

```
\pagestyle{style}
```

where the argument *style* is one of the following:

`plain` The running head is empty and the footer contains only the page number

`empty` Both the running head and the footer are blank

`headings` The running head contains the information provided by the document class and the footer is empty

`myheadings` The running head contains the information provided by the commands `\markboth` and `\markright`, the footer is empty

The `\markright` command takes only one argument. The last `\markright` on a page provides the running head information for that page. The `\markboth` command has two arguments. The first provides the running head information for a left-hand page, the second provides the running head information for a right-hand page. The AMS

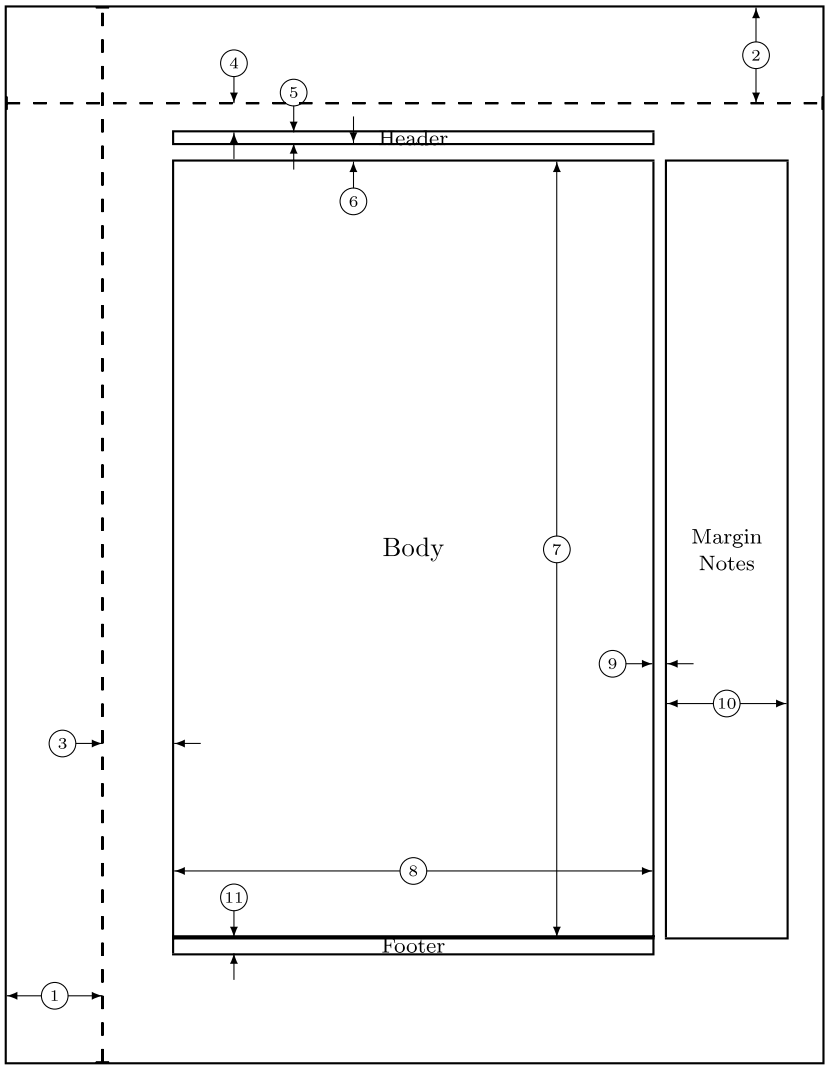


```
 1  one inch + \hoffset          2  one inch + \voffset
 3  \oddsidemargin = 54pt        4  \topmargin = 22pt
 5  \headheight = 8pt            6  \headsep = 14pt
 7  \textheight = 584pt          8  \textwidth = 360pt
 9  \marginparsep = 11pt        10  \marginparwidth = 90pt
11  \footskip = 12pt                \marginparpush = 5pt (not shown)
    \hoffset = 0pt                  \voffset = 0pt
    \paperwidth = 614pt             \paperheight = 794pt
```

Figure 10.4: Page layout for the `amsart` document class.

document classes also have a \markleft command for the running head information for a right-hand page.

The \thispagestyle command is the same as \pagestyle except that it affects only the current page.

For instance, if the current page is a full-page graphic, you might want to issue the command

```
\thispagestyle{empty}
```

The \maketitle command automatically issues a

```
\thispagestyle{plain}
```

command, so if you want to suppress the page number on the first page of a document, you have to put

```
\thispagestyle{empty}
```

immediately after the \maketitle command.

The commands listed in Figure 10.4 are length commands (see Section 15.5.2) and can be changed with the commands introduced in that section. As a rule, you do not have to worry about these settings, they are chosen by the document class for you. Sometimes, however, you have a job that requires such changes. I once had to submit a research plan on a form with a 7.5 inch by 5 inch box. To be able to cut and paste the typeset report, I had to produce the text with a \textwidth of 7 inches. If I simply set

```
\setlength{\textwidth}{7in}
```

the text would overflow the printed page and the last few characters of each line would be missing. So I had to change the margins by starting the document with

```
\documentclass[12pt]{report}
\setlength{\textwidth}{7in}
\setlength{\oddsidemargin}{0pt}
```

All of Chapter 4 of *The LaTeX Companion,* 2nd edition [46] deals with page layouts. There you can find a description of the geometry package of Hideo Umeki, which computes all the parameters from the ones you supply. Also you find there a discussion of Piet van Oostrum's excellent package, fancyhdr, which allows you to create your own page style (see also [24]). See Section E.1 on how to get these packages.

However, if you submit an article to a journal, do not change the type size, page dimensions, headers. Use the document class and the article templates the journal provides (if any). This will make your submission easier for you and the journal.

CHAPTER

11

The AMS article document class

In this chapter, we discuss `amsart`, the main AMS document class for journal articles. The AMS book document class is discussed in Chapter 18.

In Section 11.1, I argue that there are good reasons why you should write your articles for publication in `amsart`. Section 11.2 introduces the rules governing the top matter in the `amsart` document class. Section 11.3 contains a detailed sample article. We present the source file and the typeset version juxtaposed. In Section 4.2, you created a simple template for `amsart` articles. In Section 11.4, you are guided through the process for creating more detailed templates.

A document class is shaped by its options. In Section 11.5, we discuss the options of `amsart`. Section 11.6 briefly describes the various packages in the AMS distribution and their interdependencies.

11.1 Why `amsart`*?*

11.1.1 Submitting an article to the AMS

You want to submit an article written with the `amsart` document class to the Proceedings of the American Mathematical Society.

For general information on the AMS journals, go to the AMS Web site

```
http://www.ams.org/
```

and start discovering the wealth of relevant information in the column `Publications & Tools`, especially in the `Author Resource Center`.

Then click on the journal from the list, and on the Proceedings page, click on `Author packages`. The page that comes up has everything you need, in particular, the `proc-l.cls`, the document class for the Proceedings. Click on it to download the document class. Place it in the folder with your article.

There is a more direct way to find `proc-l.cls`, and this will always work even when the AMS changes the layout of its Web site. At the AMS Web site click on `Search`. In the search field, type `proc-l.cls`. Do the search and click on the link to `proc-l.cls`.

Now, in the preamble of your article, replace the line

```
\documentclass{amsart}
```

with

```
\documentclass{proc-l}
```

Typeset the article and you are done. Your article is formatted as it will appear in the Proceedings.

11.1.2 Submitting an article to Algebra Universalis

There are many journals whose document class is based on `amsart`. For instance,

```
http://www.math.umanitoba.ca/homepages/au/
```

takes you to the home page of the journal *Algebra Universalis.* To find the document class, click on `Instructions for authors` and then click where indicated to get `au.cls`. Now in your article make the replacement

```
\documentclass{au}
```

and your article typesets in the format appropriate for this journal.

11.1.3 Submitting to other journals

A large number of journals use document classes based on `amsart`. Not all are as friendly as *Algebra Universalis,* but as a rule a small number of changes in the article suffice.

All of them share the attribute that the top matter is given as the arguments of many commands. In the introductory sample article, `intrart.tex`, on page 37, there were only four, but in the sample article `sampart.tex`, on page 290, there are nine—there

could be many more. Contrast this with the legacy `article` class (see Section 12.1.1). As a result, the document class is able to shape the top matter as the journal requires. Even if the names of some of these commands are different (e.g., `affiliation` instead of `address`), the principles you learn from the `amsart` document class apply.

Many journals insist that you use their own document classes. For these, you may have to add the AMS packages (see Section 11.6) to continue to use the enhancements of the AMS.

A shrinking number of journals use document classes incompatible with the AMS packages. If you can, avoid these journals.

11.1.4 Submitting to conference proceedings

The AMS also has a document class for articles for book-form proceedings of meetings. The differences in the rules for the `amsart` and `amsproc` document classes are so minor that you can safely ignore them.

11.2 The top matter

For a fairly representative example, see the typeset top matter of the `sampart.tex` article on pages 286 and 288. As you may recall from Section 4.1, part of the author information is moved to the end of the typeset article—see page 288.

Title page information is provided as arguments of several commands. For your convenience, I divide them into three groups: information about the article, information about the author, and AMS related information.

There is only one general rule.

Rule ■ Top matter commands

All top matter commands are *short*.

This means that there can be no blank lines (or `\par` commands) in the argument of any of these commands (see Section 5.3.3).

11.2.1 Article information

You have to supply five pieces of information about the article.

Rule ■ Title

- Command: `\title`
- Separate lines with `\\`

- Optional argument: Short title for running head
- Do not put a period at the end of a title
- Do not use user-defined commands in the title

The typeset title is placed on the front page of the typeset article.

Many titles are too long to be typeset on a single line in the font used by the `amsart` document class for titles. If the way LaTeX breaks the title is not satisfactory, you can indicate where the title should be broken with the `\\` command. Alternatively, you may nudge LaTeX in the right direction with `~` (see Section 5.4.3). For instance, the title:

```
The \texttt{amsart} document class
```

is broken by LaTeX between `document` and `class`. So either add `\\`:

```
The \texttt{amsart}\\ document class
```

or replace `document class` with `document~class`:

```
The \texttt{amsart} document~class
```

The *running head* (see Section 10.6) is the title on odd-numbered pages, set in capital letters. If the title is more than a few words long, use an optional argument to specify a short title for the running head. Do not use `\\` in the short title.

Example of a title:

```
\title{A construction of distributive lattices}
```

A title with a short title:

```
\title[Complete-simple distributive lattices]
{A construction of\\ complete-simple
distributive lattices}
```

Note the AMS rules about short titles and the table of contents on Section 18.2.1.

Rule ■ Translator

- Command: `\translator`
- Do not put a period at the end of the argument.

The typeset `\translator` is placed on the last page of the typeset article, before the address(es). There can be more than one translator. Each should be given as the argument of a separate `\translator` command.

Example:

```
\translator{Harry~M. Goldstein}
```

Rule ■ Dedication

- Command: `\dedicatory`
- Separate lines with `\\`

The typeset dedication is placed under the author(s).

Example:

```
\dedicatory{To the memory of my esteemed
   friend and teacher,\\ Harry~M. Goldstein}
```

Rule ■ Date

- Command: `\date`

The typeset `\date` is placed on the front page of the typeset article as a footnote.

Examples:

```
\date{January 22, 2006}
```

You can use the `\today` command to get today's date:

```
\date{\today}
```

Do not use this when you submit an article; specify the submission date.

To suppress the date, use `\date{}` or omit the `\date` command entirely.

11.2.2 Author information

There are seven pieces of information about yourself.

Rule ■ Author

- Command: `\author`
- Optional argument: Short form of the name for the running head

---

The typeset author is placed on the front page of the typeset article.
Examples:
An author:

```
\author{George~A. Menuhin}
```

An author with a short form of the name for the running head:

```
\author[G.\,A. Menuhin]{George~A. Menuhin}
```

Section 11.2.4 discusses how to specify multiple authors.

Rule ■ Contributor

- Command: `\contrib`
- Optional argument: Describing the contribution

The typeset contributor's name is placed on the front page of the typeset article. This command is very recent. It was introduced in `amsart` version 2.20.
Examples:
A contributor authoring an appendix:

```
\contrib[with an appendix by]{John Blaise}
```

If this appendix has two authors:

```
\contrib[with an appendix by]{J. Blaise}
\contrib[]{W. Blaise}
```

This typesets (with author G. A. Menuhin) the author line as

G. A. MENUHIN, WITH AN APPENDIX BY J. BLAISE AND W. BLAISE

Contributors can have addresses, current addresses, etc., just like authors.

Rule ■ Address

- Command: `\address`
- Separate lines with `\\`
- Optional argument: Name of author

The typeset address is placed at the end of the typeset article.
Example:

DEPARTMENT OF APPLIED MATHEMATICS, UNIVERSITY OF WINNEBAGO, WINNEBAGO, MN 53714

which is typed as

```
\address{Department of Applied Mathematics\\
         University of Winnebago\\
         Winnebago, MN 53714}
```

Notice that LaTeX replaces the `\\` line separators with commas.

If there are several authors, you can use the author's name as an optional argument of `\address` to avoid ambiguity. See Example 4 in Section 11.2.5 (page 283) for a complete example.

Rule ■ Current address

- Command: `\curraddr`
- Separate lines with `\\`
- Optional argument: name of author

The typeset current address is placed at the end of the typeset article.
Example:



Current address: Department of Mathematics, University of York, Heslington, York, England

is typed as

```
\curraddr{Department of Mathematics\\
          University of York\\
          Heslington, York, England}
```

If there are several authors, you can use the author's name as an optional argument of `\curraddr` to avoid ambiguity; for some examples, see Section 11.2.5.

Rule ■ E-mail address

- Command: `\email`
- Optional argument: Name of author

The typeset e-mail address is placed at the end of the typeset article.
Example:

```
\email{gmen@ccw.uwinnebago.edu}
```

Tip Some e-mail addresses contain the special underscore character (_). Recall (see Section 5.4.4) that you have to type `\_` to get _.

Example:

```
\email{George\_Gratzer@umanitoba.ca}
```

Tip Some older e-mail addresses contain the percent symbol (%); recall that you have to type `\%` to get % (see Section 5.4.4).

Example:

```
\email{h1175moy\%ella@relay.eu.net}
```

Rule ■ Web (home) page (URL)

- Command: `\urladdr`
- Optional argument: Name of author

The typeset Web (home) page is placed at the end of the typeset article.
Example:

```
\urladdr{http://www.maths.umanitoba.ca/homepages/gratzer/}
```

Tip Many Internet addresses contain the tilde (~), indicating the home directory of the user. Type ~ to get ~ and not \~, as recommended in Section 5.4.4. `$\sim$` is also unacceptable.

Example:

```
\urladdr{http://kahuna.math.hawaii.edu/~ralph/}
```

Rule ■ Research support or other acknowledgments

- Command: `\thanks`
- Do not specify linebreaks.
- Terminate the sentence with a period.

The typeset research support or other acknowledgments is placed on the front page of the typeset article as an unmarked footnote.
Example:

```
\thanks{Supported in part by NSF grant PAL-90-2466.}
```

A `\thanks{}` command is ignored in typesetting.

11.2.3 AMS information

The AMS requires that you supply two more pieces of information about the article.

The following are collected at the bottom of the first page as unmarked footnotes along with the arguments of the `\thanks` and `\date` commands.

Rule ■ AMS subject classifications

- Command: `\subjclass`
- Optional argument: `2000`—the default is 1991.

- `amsart` supplies the phrase 1991 *Mathematics Subject Classification* and a period at the end of the subject classification—with the optional argument `2000`, the phrase is 2000 *Mathematics Subject Classification*
- The argument should be either a five-character code or the phrase `Primary:` followed by a five-character code, a semicolon, the phrase `Secondary:` and one or more additional five-character codes.

The typeset AMS subject classifications is placed at the bottom of the front page of the typeset article as a footnote.
Examples:

```
\subjclass[2000]{06B10}
\subjclass[2000]{Primary: 06B10; Secondary: 06D05}
```

The current subject classification scheme for mathematics was adopted in 2000, making the 1991 classification scheme obsolete. Thus, `2000` should be considered as a *compulsory* optional argument—maybe the only one in all of LaTeX.

The current subject classification scheme, MSC 2000, is available from the AMS Web site

`http://www.ams.org/`

Search for `MSC`. Or in the `Author Resource Center` click on `MSC`.

Rule ■ Keywords

- Command: `\keywords`
- Do not indicate line breaks.
- `amsart` supplies the phrase *Key words and phrases.* and a period at the end of the list of keywords.

The typeset keywords are placed on the front page of the typeset article as a footnote.
Example:

```
\keywords{Complete lattice, distributive lattice,
complete congruence, congruence lattice}
```

Keywords are optional for many journals.

Further footnotes An additional `\thanks` command creates an unmarked footnote. *Examples:*

```
\thanks{This is a preliminary version of this article,
        prepared for the Second Annual Meeting of the
        Statistical Association of Winnebago.}
\thanks{This article is in final form, and no version
                of it will be submitted elsewhere.}
```

11.2.4 Multiple authors

If an article has several authors, repeat the author information commands for each one. Take care that the e-mail address follows the address.

If two authors share the same address, omit the `\address` command for the second author, who can still have a different e-mail address and Web home page. An additional `\thanks` command for the first author should precede any `\thanks` commands for the second author. Since the footnotes are not marked, the argument of the `\thanks` command for research support should contain a reference to the author:

```
\thanks{The research of the first author was supported
        in part by NSF grant PAL-90-2466.}
\thanks{The research of the second author was supported by
        the Hungarian National Foundation for Scientific
        Research, under Grant No.~9901.}
```

Finally, if an article has more than two authors, supply the author information for each author as usual, but explicitly specify the running heads with the `\markleft` command:

```
\markleft{first author ET AL.}
```

where *first author* must be all capitals.

If there are multiple authors, sometimes it may not be clear whose address, current address, e-mail address, or Web home page is being given. In such cases you can give the name of the author as an optional argument for these commands. For example,

Email address, Ernest T. Moynahan: `emoy@ccw.uwinnebago.edu`.

is typed as

```
\email[Ernest~T. Moynahan]{emoy@ccw.uwinnebago.edu}
```

See also Example 4 in Section 11.2.5.

11.2.5 Examples

The following examples show typical top matter commands and can be found in the `topmat.tpl` file in the `samples` folder (see page 4).

Example 1 One author.

```
%  Article information
\title[Complete-simple distributive lattices]
      {A construction of complete-simple\\
       distributive lattices}
\date{\today}

%  Author information
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
\email{gmen@ccw.uwinnebago.edu}
\urladdr{http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{This research was supported by
        the NSF under grant number 23466.}

%  AMS information
\keywords{Complete lattice, distributive lattice,
          complete congruence, congruence lattice}
\subjclass[2000]{Primary: 06B10; Secondary: 06D05}
```

In the `\title` command, supplying the optional argument for the running head is the rule, not the exception. The only required item is `\title`. If it is missing, you get the strange error message:

```
! Undefined control sequence.
<argument> \shorttitle

l.49 \maketitle
```

Example 2 Two authors but only the first has a Web home page. I only show the author information section here. The other commands are the same as in Example 1.

```
%  Author information
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
```

```
\email{gmen@ccw.uwinnebago.edu}
\urladdr{http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{The research of the first author was
        supported by the NSF under grant number 23466.}
\author{Ernest~T. Moynahan}
\address{Mathematical Research Institute
         of the Hungarian Academy of Sciences\\
         Budapest, P.O.B. 127, H-1364\\
         Hungary}
\email{h1175moy\%ella@relay.eu.net}
\thanks{The research of the second author
        was supported by the Hungarian
        National Foundation for Scientific Research,
        under Grant No. 9901.}
```

Example 3 Two authors, same department. I only show the author information section here. The other commands are identical to those in Example 1.

```
%  Author information
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
\email[George~A. Menuhin]{gmen@ccw.uwinnebago.edu}
\urladdr[George~A. Menuhin]%
        {http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{The research of the first author was
        supported by the NSF under grant number~23466.}
\author{Ernest~T. Moynahan}
\email[Ernest~T. Moynahan]{emoy@ccw.uwinnebago.edu}
\thanks{The research of the second author was supported
        by the Hungarian National Foundation for
        Scientific Research, under Grant No. 9901.}
```

Note that the second author has no `\address`.

Example 4 Three authors, the first two from the same department, the second and third with e-mail addresses and research support. I only show the author information section. The other commands are unchanged. There are various ways of handling this situation. This example shows one solution.

```
%  Author information
\author{George~A. Menuhin}
```

```
\address[George~A. Menuhin and Ernest~T. Moynahan]
   {Computer Science Department\\
    University of Winnebago\\
    Winnebago, MN 53714}
\email[George~A. Menuhin]{gmen@ccw.uwinnebago.edu}
\urladdr[George~A. Menuhin]%
        {http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{The research of the first author was
        supported by the NSF under grant number 23466.}
\author{Ernest~T. Moynahan}
\email[Ernest~T. Moynahan]{emoy@ccw.uwinnebago.edu}
\thanks{The research of the second author was supported
        by the Hungarian National Foundation for
        Scientific Research, under Grant No. 9901.}
\author{Ferenc~R. Richardson}
\address[Ferenc~R. Richardson]
   {Department of Mathematics\\
    California United Colleges\\
    Frasco, CA 23714}
\email[Ferenc~R. Richardson]{frich@ccu.frasco.edu}
\thanks{The research of the third author was
        supported by the NSF under grant number 23466.}
```

Tip The most common mistake in the top matter is the misspelling of a command name; for instance, `\adress`. LaTeX sends the error message

```
! Undefined control sequence.
l.37 \adress
            {Computer Science Department\\
```

which tells you exactly what you mistyped. Similarly, if you drop a closing brace, as in

```
\email{menuhin@ccw.uwinnebago.edu
```

you are told clearly what went wrong. Because the top matter commands are short (see Section 5.3.3), LaTeX gives the error message

```
Runaway argument?
{menuhin@ccw.uwinnebago.edu \thanks
       {The research of th\ETC.
!File ended while scanning use of \\email.
```

If you drop an opening brace,

```
\author George~A. Menuhin}
```

you get the error message

```
! Too many }'s.
l.43 \author George~A. Menuhin}
```

If you enclose an optional argument in braces instead of brackets,

```
\title{Complete-simple distributive lattices}%
      {A construction of complete-simple\\
       distributive lattices}
```

LaTeX uses the short title as the title and the real title is typeset before the title of the typeset article.

11.2.6 Abstract

As we discussed in Section 10.3.1, you type the abstract in an `abstract` environment, which you place as the last item before the `\maketitle` command. The abstract should be self-contained, so do not include cross-references and do not cite from the bibliography. Avoid user-defined commands.

If you place the abstract *after* the `\maketitle` command, LaTeX typesets it wherever it happens to be and sends a warning.

11.3 The sample article

`sampart.tex` is the source file for our more advanced sample article using `amsart` (in the `samples` folder, see page 4). A simpler article using `amsart` is presented in Part I (see Section 4.1).

The typeset `sampart.tex` is shown on the following three pages.

A CONSTRUCTION OF COMPLETE-SIMPLE DISTRIBUTIVE LATTICES

GEORGE A. MENUHIN

Abstract. In this note we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices in which there are only two complete congruences.

1. Introduction

In this note we prove the following result:

Main Theorem. *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2. The $D^{\langle 2\rangle}$ construction

For the basic notation in lattice theory and universal algebra, see Ferenc R. Richardson [5] and George A. Menuhin [2]. We start with some definitions:

Definition 1. Let V be a complete lattice, and let $\mathfrak{p} = [u, v]$ be an interval of V. Then $\mathfrak{p}$ is called *complete-prime* if the following three conditions are satisfied:

(1) u is meet-irreducible but u is *not* completely meet-irreducible;
(2) v is join-irreducible but v is *not* completely join-irreducible;
(3) $[u, v]$ is a complete-simple lattice.

Now we prove the following result:

Lemma 1. *Let D be a complete distributive lattice satisfying conditions* (1) *and* (2)*. Then $D^{\langle 2\rangle}$ is a sublattice of D^2; hence $D^{\langle 2\rangle}$ is a lattice, and $D^{\langle 2\rangle}$ is a complete distributive lattice satisfying conditions* (1) *and* (2)*.*

Proof. By conditions (1) and (2), $D^{\langle 2\rangle}$ is a sublattice of D^2. Hence, $D^{\langle 2\rangle}$ is a lattice.

Since $D^{\langle 2\rangle}$ is a sublattice of a distributive lattice, $D^{\langle 2\rangle}$ is a distributive lattice. Using the characterization of standard ideals in Ernest T. Moynahan [3], $D^{\langle 2\rangle}$ has a zero and a unit element, namely, $\langle 0, 0\rangle$ and $\langle 1, 1\rangle$. To show that $D^{\langle 2\rangle}$ is complete, let $\varnothing \neq A \subseteq D^{\langle 2\rangle}$, and let $a = \bigvee A$ in D^2. If $a \in D^{\langle 2\rangle}$, then $a = \bigvee A$ in $D^{\langle 2\rangle}$; otherwise, a is of the form $\langle b, 1\rangle$ for some $b \in D$ with $b < 1$. Now $\bigvee A = \langle 1, 1\rangle$ in D^2 and the dual argument shows that $\bigwedge A$ also exists in D^2. Hence D is complete. Conditions (1) and (2) are obvious for $D^{\langle 2\rangle}$. □

Corollary 1. *If D is complete-prime, then so is $D^{\langle 2\rangle}$.*

Date: March 15, 2006.

2000 *Mathematics Subject Classification.* Primary: 06B10; Secondary: 06D05.

Key words and phrases. Complete lattice, distributive lattice, complete congruence, congruence lattice.

Research supported by the NSF under grant number 23466.

The motivation for the following result comes from Soo-Key Foo [1].

Lemma 2. *Let Θ be a complete congruence relation of $D^{\langle 2\rangle}$ such that*

$$\langle 1, d\rangle \equiv \langle 1, 1\rangle \pmod{\Theta}, \tag{2.1}$$

for some $d \in D$ with $d < 1$. Then $\Theta = \iota$.

Proof. Let Θ be a complete congruence relation of $D^{\langle 2\rangle}$ satisfying (2.1). Then $\Theta = \iota$. □

3. The Π^* construction

The following construction is crucial to our proof of the Main Theorem:

Definition 2. Let D_i, for $i \in I$, be complete distributive lattices satisfying condition (2). Their Π^* product is defined as follows:

$$\Pi^*(D_i \mid i \in I) = \Pi(D_i^- \mid i \in I) + 1;$$

that is, $\Pi^*(D_i \mid i \in I)$ is $\Pi(D_i^- \mid i \in I)$ with a new unit element.

Notation. If $i \in I$ and $d \in D_i^-$, then

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle$$

is the element of $\Pi^*(D_i \mid i \in I)$ whose i-th component is d and all the other components are 0.

See also Ernest T. Moynahan [4]. Next we verify:

Theorem 1. *Let D_i, for $i \in I$, be complete distributive lattices satisfying condition (2). Let Θ be a complete congruence relation on $\Pi^*(D_i \mid i \in I)$. If there exist $i \in I$ and $d \in D_i$ with $d < 1_i$ such that for all $d \le c < 1_i$,*

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \tag{3.1}$$

then $\Theta = \iota$.

Proof. Since

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \equiv \langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \pmod{\Theta}, \tag{3.2}$$

and Θ is a complete congruence relation, it follows from condition (3) that

$$\begin{aligned} &\langle \dots, \overset{i}{d}, \dots, 0, \dots \rangle \\ &\equiv \bigvee (\langle \dots, 0, \dots, \overset{i}{c}, \dots, 0, \dots \rangle \mid d \le c < 1) \equiv 1 \pmod{\Theta}. \end{aligned} \tag{3.3}$$

Let $j \in I$ for $j \neq i$, and let $a \in D_j^-$. Meeting both sides of the congruence (3.2) with $\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle$, we obtain

$$\begin{aligned} 0 &= \langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \wedge \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \\ &\equiv \langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \pmod{\Theta}. \end{aligned} \tag{3.4}$$

Using the completeness of Θ and (3.4), we get:

$$0 \equiv \bigvee (\langle \dots, 0, \dots, \overset{j}{a}, \dots, 0, \dots \rangle \mid a \in D_j^-) = 1 \pmod{\Theta},$$

hence $\Theta = \iota$. □

Theorem 2. *Let D_i for $i \in I$ be complete distributive lattices satisfying conditions* (2) *and* (3)*. Then $\Pi^*(D_i \mid i \in I)$ also satisfies conditions* (2) *and* (3)*.*

Proof. Let Θ be a complete congruence on $\Pi^*(D_i \mid i \in I)$. Let $i \in I$. Define

$$\widehat{D}_i = \{\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle \mid d \in D_i^-\} \cup \{1\}.$$

Then $\widehat{D}_i$ is a complete sublattice of $\Pi^*(D_i \mid i \in I)$, and $\widehat{D}_i$ is isomorphic to D_i. Let Θ_i be the restriction of Θ to $\widehat{D}_i$.

Since D_i is complete-simple, so is $\widehat{D}_i$, and hence Θ_i is ω or ι. If $\Theta_i = \rho$ for all $i \in I$, then $\Theta = \omega$. If there is an $i \in I$, such that $\Theta_i = \iota$, then $0 \equiv 1 \pmod{\Theta}$, hence $\Theta = \iota$. □

The Main Theorem follows easily from Theorems 1 and 2.

References

[1] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December, 1990.
[2] George A. Menuhin, *Universal algebra*. D. Van Nostrand, Princeton, 1968.
[3] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
[4] ———, *Ideals and congruence relations in lattices*. II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **9** (1957), 417–434 (Hungarian).
[5] Ferenc R. Richardson, *General lattice theory*. Mir, Moscow, expanded and revised ed., 1982 (Russian).

Computer Science Department, University of Winnebago, Winnebago, MN 53714
E-mail address: menuhin@ccw.uwinnebago.edu
URL: http://math.uwinnebago.edu/homepages/menuhin/

The next two pages show the first page of the source file facing a fragment of the first page of the typeset article. It displays the part of this first typeset page that comes from the facing source file.

On the two pages after the facing first pages, some parts of the source file and the typeset version are shown juxtaposed, so that you can see how the marked-up source file becomes the typeset article.

```
% Sample file: sampart.tex
% The sample article for the amsart document class

\documentclass{amsart}
\usepackage{amssymb,latexsym}

\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}
\newtheorem*{main}{Main~Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}

\theoremstyle{definition}
\newtheorem{definition}{Definition}

\theoremstyle{remark}
\newtheorem*{notation}{Notation}

\numberwithin{equation}{section}

\begin{document}
\title[Complete-simple distributive lattices]
      {A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
\email{menuhin@ccw.uwinnebago.edu}
\urladdr{http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{Research supported by the NSF under grant number
23466.}
\keywords{Complete lattice, distributive lattice,
   complete congruence, congruence lattice}
\subjclass[2000]{Primary: 06B10; Secondary: 06D05}
\date{March 15, 2006}
\begin{abstract}
   In this note we prove that there exist \emph{complete-simple distributive
   lattices,} that is, complete distributive lattices in which there are
   only two complete congruences.
\end{abstract}

\maketitle

\section{Introduction}\label{S:intro}
In this note we prove the following result:

\begin{main}
   There exists an infinite complete distributive lattice~$K$ with only
   the two trivial complete congruence relations.
\end{main}

\section{The $D^{\langle 2 \rangle}$ construction}\label{S:Ds}
For the basic notation in lattice theory and universal algebra, see Ferenc~R.
Richardson~\cite{fR82} and George~A. Menuhin~\cite{gM68}.  We start with some
definitions:
```

A CONSTRUCTION OF COMPLETE-SIMPLE DISTRIBUTIVE LATTICES

GEORGE A. MENUHIN

Abstract. In this note we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices in which there are only two complete congruences.

1. Introduction

In this note we prove the following result:

Main Theorem. *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2. The $D^{\langle 2\rangle}$ construction

For the basic notation in lattice theory and universal algebra, see Ferenc R. Richardson [5] and George A. Menuhin [2]. We start with some definitions:

Date: March 15, 2006.

2000 *Mathematics Subject Classification.* Primary: 06B10; Secondary: 06D05.

Key words and phrases. Complete lattice, distributive lattice, complete congruence, congruence lattice.

Research supported by the NSF under grant number 23466.

Since $D^{\langle 2\rangle}$ is a sublattice of a distributive lattice, $D^{\langle 2\rangle}$ is a distributive lattice. Using the characterization of standard ideals in Ernest T. Moynahan [3], $D^{\langle 2\rangle}$ has a zero and a unit element, namely, $\langle 0, 0\rangle$ and $\langle 1, 1\rangle$. To show that $D^{\langle 2\rangle}$ is complete, let $\varnothing \neq A \subseteq D^{\langle 2\rangle}$, and let $a = \bigvee A$ in D^2. If $a \in D^{\langle 2\rangle}$, then $a = \bigvee A$ in $D^{\langle 2\rangle}$; otherwise, a is of the form $\langle b, 1\rangle$ for some $b \in D$ with $b < 1$. Now $\bigvee A = \langle 1, 1\rangle$ in D^2 and the dual argument shows that $\bigwedge A$ also exists in D^2. Hence D is complete. Conditions (1) and (2) are obvious for $D^{\langle 2\rangle}$. □

Corollary 1. *If D is complete-prime, then so is $D^{\langle 2\rangle}$.*

The motivation for the following result comes from Soo-Key Foo [1].

Lemma 2. *Let Θ be a complete congruence relation of $D^{\langle 2\rangle}$ such that*

$$\langle 1, d\rangle \equiv \langle 1, 1\rangle \pmod{\Theta}, \tag{2.1}$$

for some $d \in D$ with $d < 1$. Then $\Theta = \iota$.

```
   Since $D^{\langle 2 \rangle}$ is a sublattice of a distributive
   lattice, $D^{\langle 2 \rangle}$ is a distributive lattice.  Using
   the characterization of standard ideals in Ernest~T. Moynahan~\cite{eM57},
   $D^{\langle 2 \rangle}$ has a zero and a unit element,
   namely, $\langle 0, 0 \rangle$ and $\langle 1, 1 \rangle$.
   To show that $D^{\langle 2 \rangle}$ is complete, let
   $\varnothing \ne A \subseteq D^{\langle 2 \rangle}$, and let
   $a = \bigvee A$ in $D^{2}$.  If
   $a \in D^{\langle 2 \rangle}$, then
   $a = \bigvee A$ in $D^{\langle 2 \rangle}$; otherwise, $a$
   is of the form $\langle b, 1 \rangle$ for some
   $b \in D$ with $b < 1$.  Now $\bigvee A = \langle 1, 1\rangle$
   in $D^{2}$ and the dual argument shows that $\bigwedge A$ also
   exists in $D^{2}$.  Hence $D$ is complete. Conditions \eqref{m-i}
   and~\eqref{j-i} are obvious for $D^{\langle 2 \rangle}$.
\end{proof}

\begin{corollary}\label{C:prime}
   If $D$ is complete-prime, then so is $D^{\langle 2 \rangle}$.
\end{corollary}

The motivation for the following result comes from Soo-Key Foo~\cite{sF90}.

\begin{lemma}\label{L:ccr}
   Let $\Theta$ be a complete congruence relation of
   $D^{\langle 2 \rangle}$ such that
   \begin{equation}\label{E:rigid}
      \langle 1, d \rangle \equiv \langle 1, 1 \rangle \pmod{\Theta},
   \end{equation}
   for some $d \in D$ with $d < 1$. Then $\Theta = \iota$.
\end{lemma}
```

Since D_i is complete-simple, so is $\widehat{D}_i$, and hence Θ_i is ω or ι. If $\Theta_i = \rho$ for all $i \in I$, then $\Theta = \omega$. If there is an $i \in I$, such that $\Theta_i = \iota$, then $0 \equiv 1 \pmod{\Theta}$, hence $\Theta = \iota$. □

The Main Theorem follows easily from Theorems 1 and 2.

References

[1] Soo-Key Foo, *Lattice Constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December, 1990.

[2] George A. Menuhin, *Universal algebra*. D. Van Nostrand, Princeton, 1968.

[3] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

[4] ———, *Ideals and congruence relations in lattices.* II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **9** (1957), 417–434 (Hungarian).

[5] Ferenc R. Richardson, *General lattice theory*. Mir, Moscow, expanded and revised ed., 1982 (Russian).

Computer Science Department, University of Winnebago, Winnebago, MN 53714

E-mail address: menuhin@ccw.uwinnebago.edu

URL: http://math.uwinnebago.edu/homepages/menuhin/


```
   Since $D_{i}\) is complete-simple, so is $\widehat{D}_{i}$, and
   hence $\Theta_{i}$ is $\omega$ or $\iota$.  If
   $\Theta_{i} = \rho$ for all $i \in I$, then
   $\Theta = \omega$.  If there is an $i \in I$, such that
   $\Theta_{i} = \iota$, then $0 \equiv 1 \pmod{\Theta}$, hence
   $\Theta = \iota$.
\end{proof}

The Main Theorem follows easily from Theorems \ref{T:P*} and~\ref{T:P*a}.

\begin{thebibliography}{9}

   \bibitem{sF90}
      Soo-Key Foo, \emph{Lattice Constructions}, Ph.D. thesis, University
      of Winnebago, Winnebago, MN, December, 1990.

   \bibitem{gM68}
      George~A. Menuhin, \emph{Universal algebra}. D.~Van Nostrand,
      Princeton, 1968.

   \bibitem{eM57}
      Ernest~T. Moynahan, \emph{On a problem of M. Stone}, Acta Math.
       Acad. Sci. Hungar. \textbf{8} (1957), 455--460.

   \bibitem{eM57a}
      \bysame, \emph{Ideals and congruence relations in lattices}. II,
     Magyar Tud. Akad. Mat. Fiz. Oszt. K\"{o}zl. \textbf{9} (1957),
     417--434  (Hungarian).

   \bibitem{fR82}
      Ferenc~R. Richardson, \emph{General lattice theory}. Mir, Moscow,
      expanded and revised ed., 1982 (Russian).

\end{thebibliography}
\end{document}
```

11.4 Article templates

In this section, we create a template you can use for your `amsart` articles. A template is a read-only file. Open it with a text editor and save it under a different name. You can then start to write your new article using the new file, without having to remember the details governing the preamble and the top matter.

Create the template, which contains a customized preamble and top matter with sample bibliographic items, in several steps.

Step 1 In your text editor, open the `amsart.tpl` document from the `samples` folder (see page 4) and save it in your `work` subfolder as `myams.tpl`. Alternatively, type in the lines as shown in this section.

The first few lines of the file are

```
% Sample file: amsart.tpl


% Preamble
\documentclass{amsart}
\usepackage{amssymb,latexsym}
```

Notice the use of commented out lines (lines that start with %) that have been added as comments about the file.

Edit line 1 to read

```
% Template file: myams.tpl
```

The lines

```
\documentclass{amsart}
\usepackage{amssymb,latexsym}
```

specify the `amsart` document class and the use of the `amssymb` and `latexsym` packages to gain access by name to all the symbols listed in Appendix B.

Step 2 After the `\usepackage` command, there are sets of proclamation definitions corresponding to the examples in Section 6.4.2.

Choose Option 5 for `myams.tpl` by deleting all the lines related to the other options. You are left with the lines

```
% Theorems, corollaries, lemmas, and propositions, in the
% most emphatic (plain) style. All are numbered separately.
% There is a Main Theorem in the most emphatic (plain)
% style, unnumbered. There are definitions, in the less
% emphatic(definition) style. There are notations, in the
% least emphatic (remark) style, unnumbered.
```

```
\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}
\newtheorem*{main}{Main Theorem}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}

\theoremstyle{definition}
\newtheorem{definition}{Definition}

\theoremstyle{remark}
\newtheorem*{notation}{Notation}
```

Step 3 Two more choices are presented. You can have either one or two authors—for more complex situations, see Section 11.2.4. For the `myams.tpl` template, choose one author by deleting everything between

```
%  Two authors
```

and

```
%  End Two authors
```

You are left with

```
\begin{document}
% One author
\title[shorttitle]{titleline1\\
                   titleline2}
\author{name}
\address{line1\\
         line2\\
         line3}
\email{name@address}
\urladdr{http://homepage}
\thanks{thanks}
% End one author

\keywords{keywords}
\subjclass[2000]{Primary: subject; Secondary: subject}
\date{date}

\begin{abstract}
   abstract
```

```
\end{abstract}
\maketitle

\begin{thebibliography}{99}

\end{thebibliography}
\end{document}
```

In the top matter, fill in your own personal information. For instance, I edited

```
\author{name}
```

to read

```
\author{George~Gr\"{a}tzer}
```

I also edited `\address`, `\email`, `\urladdr`, and `\thanks`. After editing, I had the following:

```
% top matter
\title[shorttitle]{titleline1\\
                   titleline2}
\author{George~Gr\"{a}tzer}
\address{University of Manitoba\\
         Department of Mathematics\\
         Winnipeg, MB R3T 2N2\\
         Canada}
\email{gratzer@ms.umanitoba.ca}
\urladdr{http://server.maths.umanitoba.ca/homepages/gratzer/}
\thanks{Research supported by the NSERC of Canada.}

\keywords{keywords}
\subjclass[2000]{Primary: subject; Secondary: subject}
\date{date}

\begin{abstract}
   abstract
\end{abstract}
\maketitle

\begin{thebibliography}{99}

\end{thebibliography}
\end{document}
```

Since this template is meant to be used for all my future articles, I do not edit the lines that change from article to article (`\title`, `\keywords`, and so on).

Remember that the short title is for running heads, the title shown at the top of every odd-numbered page other than the title page. If the title of your article is only one line long, delete the separation mark `\\` and the second line, except for the closing brace. If the full title of your article is short, delete `[shorttitle]`.

Now save `myams.tpl`. I saved my template under the name `ggamsart.tpl` (in the `samples` folder, see page 4). You can also make an additional template with two authors to be used as a template for joint articles. Note that at the end of the template, just before the line `\end{document}`, there are two lines:

```
\begin{thebibliography}{99}

\end{thebibliography}
```

The argument of `\begin{thebibliography}` should be `9` if there are fewer than 10 references, `99` with 10–99 references, and so forth. We discuss how to format bibliographic items in Sections 4.2.4 and 10.5.1. The templates for bibliographic items are listed after the `\end{document}` line.

To make sure that you do not overwrite your template, I recommend that you make it read-only. How you do this depends on your computer's operating system.

You should modify the template you create in this section to the template of the journal you submit your article to. In the `samples` folder, you find the AMS template for the Proceedings of the AMS, called `amsproc.template`.

11.5 Options

The `amsart` document class supports a number of options, affecting many attributes.

For each attribute there is a *default value* that is used if a value is not specified.

Font size

Options:	`9pt`	
	`10pt`	*default*
	`11pt`	
	`12pt`	

This option declares the default font size. You may want to use the `12pt` option for proofreading:

```
\documentclass[12pt]{amsart}
```

Remember, however, that changing the font size changes the line breaks, so changing the `12pt` option back to `10pt` may require that you make some adjustments in the text (see Section 2.3).

Paper size

Options:	`letterpaper`	(8.5 inches by 11 inches)	*default*
	`legalpaper`	(8.5 inches by 14 inches)	
	`a4paper`	(210 mm by 297 mm)	

Equations and equation numbers

A number of options deal with the placement of equations and equation numbers.

Options:	`leqno`	*default*
	`reqno`	

By default, equation numbers are placed on the left, the default `leqno` option. The `reqno` option places the equation numbers on the right.

Option: `fleqn`

This option positions equations a fixed distance from the left margin rather than centering them. The `fleqn` option is typically used in conjunction with the `reqno` option. Here is how an equation looks with the `fleqn` and `reqno` options:

$$\int_0^{\pi} \sin x \, dx = 2 \tag{1}$$

typed as

```
\begin{equation}\label{E:firstInt}
  \int_{0}^{\pi} \sin x \, dx = 2
\end{equation}
```

Options:	`tbtags`	
	`centertags`	*default*

The `tbtags` option uses *top-or-bottom tags* for a `split` environment, that is, it places the equation number level with the last line if numbers are on the right, or level with the first line if the numbers are on the left:

$$\begin{aligned} (1) \qquad f &= (x_1x_2x_3x_4x_5x_6)^2 \\ &= (x_1x_2x_3x_4x_5 + x_1x_3x_4x_5x_6 + x_1x_2x_4x_5x_6 + x_1x_2x_3x_5x_6)^2 \\ &= (x_1x_2x_3x_4 + x_1x_2x_3x_5 + x_1x_2x_4x_5 + x_1x_3x_4x_5)^2 \end{aligned}$$

The `centertags` option (the default) vertically centers the equation number in a `split` subsidiary math environment.

Limits

Options: `intlimits`
`nointlimits` *default*

The `intlimits` option places the subscripts and superscripts of integral symbols above and below the integral symbol rather than on the side in a displayed math formula—with this option you can use the `\nolimit` command to disable the option for one integral. The `nointlimits` option positions the subscripts and superscripts of integral symbols on the side.

Options: `sumlimits` *default*
`nosumlimits`

The `sumlimits` option places the subscripts and superscripts of large operators, such as $\sum$, $\prod$, $\coprod$, $\bigotimes$, $\bigoplus$, above and below the large operator in a displayed math formula. `nosumlimits` positions them on the side (see Table 7.5 and Section B.7.1).

Options: `namelimits` *default*
`nonamelimits`

The `namelimits` option places the subscripts and superscripts of operators with limits such as $\det$, $\inf$, $\lim$, $\max$, $\min$, and so on, above and below the operator in a displayed math formula. `nonamelimits` positions them on the side (see Tables 7.2, 7.3, and Section B.7).

Two-sided printing

Options: `twoside` *default*
`oneside`

The `twoside` option formats the output for printing on both sides of the paper. The alternative is the `oneside` option. This option influences running heads, the placement of page numbers, and so on.

Two-column printing

Options: `twocolumn`
`onecolumn` *default*

The `twocolumn` option typesets the document in two columns.

Title page

Options: `titlepage`
`notitlepage` *default*

The `titlepage` option creates a separate title page including the abstract.
The `notitlepage` option splits the top matter between the first and last pages of the typeset article.

Draft

Options: `draft`
`final` *default*

The `draft` option prints a slug in the margin next to each line that is too wide. The `final` option does not. Note that this option is passed on to some packages, such as `graphicx`.

Fonts

Option: `noamsfonts`

With this option, the document class does not load the packages necessary for the use of the AMSFonts font set.

Option: `psamsfonts`

The `psamsfonts` option tells LaTeX to use the PostScript version of the AMSFonts set.

No math

Option: `nomath`

By default, `amsart` loads the `amsmath` package (which, in turn, loads three more math packages). If you want to use the title page and related features without the math features, you can use the `nomath` option.

11.6 The AMS packages

If you follow the recommendation of this book and begin each article with

```
\documentclass{amsart}
\usepackage{amssymb,latexsym}
```

then you can safely ignore most of the information in this section. There are two minor exceptions, the packages `amsxtra` and `upref`.

However, if you use a document class that does not load the same packages that `amsart` loads, then you have to load the packages needed for your work. Typically, you have

```
\usepackage{amsmath,amsfonts,amsthm}
\usepackage{amssymb,latexsym}
```

as a minimum.

The AMS distribution contains many packages that can be loaded together or by themselves.

Math enhancements

`amsmath` The primary math enhancement package, which loads the four packages, `amsgen`, `amsbsy`, `amsopn`, and `amstext`.

`amsbsy` Provides two commands for the use of bold math symbols, `\boldsymbol` and `\pmb` (see Section 8.3.3).

`amscd` Commands for creating simple commutative diagrams (see Section 9.8).

`amsgen` An auxiliary package that is never invoked directly. It is loaded by all the AMS math packages (except for `upref`).

`amsopn` Provides operator names and also the `\DeclareMathOperator` command for defining new ones (see Section 7.6).

`amstext` Defines the `\text` command and redefines commands such as `\textrm` and `\textbf` to behave like the `\text` command (see Section 7.4.6).

`amsxtra` Provides the "sp" math accents (see Sections 7.7 and B.8) and loads the `amsmath` package.

`upref` Ensures that the `\ref` command always produces upright numbers.

AMSFonts

`amsfonts` Contains the basic commands needed to utilize the AMSFonts. It also defines the `\mathfrak` command which makes the Euler Fraktur math alphabet available (see Section 8.3.2). If you use the PostScript AMSFonts font set, you should load this package with the option

```
\usepackage[psamsfonts]{amsfonts}
```

In addition, if you want to use the `12pt` document class option, then you must also load the `exscale` package (see Section 12.3):

```
\usepackage{exscale}
```

`amssymb` Defines the symbol names for `amsfonts`. It loads `amsfonts`.

`eucal` Replaces the calligraphic math alphabet with the Euler Script math alphabet (see Section 8.3.2). If you load it with the option `mathscr`, as in

```
\usepackage[mathscr]{eucal}
```

then both the `\mathscr` and the `\mathcal` commands are available, so you can have both $\mathcal{CE}$ and $\mathscr{CE}$, typed as

```
$\mathcal{C}\mathcal{E}$ and $\mathscr{C}\mathscr{E}$
```

`eufrak` Defines the Euler Fraktur math alphabet (see Section 8.3.2).

Loading packages

`amsart` contains code to provide more flexible formatting of proclamations and the `proof` environment (see Sections 6.4.2 and 6.5). By loading the `amsthm` package you can add this functionality to a non-AMS document class. The `amsthm` package loads the `amsgen` package.

`amsart` loads four packages from the math enhancements group, the `amsmath`, `amsbsy`, `amstext`, `amsopn`, and `amsgen` packages, and the `amsfonts` package from the AMSFonts group.

A typical article using the legacy `article` document class (see Section 12.1) and the AMS enhancements would normally have

```
\documentclass{article}
\usepackage{amsmath}% math enhancements
\usepackage{amssymb,latexsym}% AMSFonts and LaTeX symbol names
\usepackage{amsthm}% proclamations with style
```

and perhaps the following:

```
\usepackage{eucal}% Euler Script
```

Note that it is not critical for you to remember which packages load others. No harm is done if you type

```
\usepackage{amsmath}
\usepackage{amsbsy}
```

The `amsbsy` package is loaded by the `amsmath` package, and the

```
\usepackage{amsbsy}
```

line is ignored by LaTeX.

All the math related options of `amsart` (see Section 11.5) are also options of the `amsmath` package. So, for instance, if you want the equation numbers on the right, load `amsmath` with the `reqno` option:

```
\usepackage[reqno]{amsmath}
```

Multiple indices

The AMS distribution also contains the package `amsmidx` for creating multiple indices. This package is discussed in Section 17.5.

CHAPTER

12

Legacy document classes

Even though the AMS spent a few decades refining the `amsart` document class, some of the legacy document classes of LaTeX are still around. If you want to whip up a quick report or write up a research note, the legacy `article` or `report` document classes may serve you well.

In this chapter, we discuss some of the legacy LaTeX document classes. We take up the `book` document class in Chapter 18.

We do not discuss the `slides` document class for preparing slides. It is now considered obsolete. Use instead the `beamer` class which we discuss in Chapter 14 or the FoilTeX class discussed in Section 4.4.

We conclude this chapter with a description of the components of the standard LaTeX distribution.

12.1 Articles and reports

The `article` and `report` document classes are very similar. There are two substantive differences to remember:

1. The `report` document class provides a separate page for the abstract by default, the `article` document class does not.

2. The `report` document class has two additional sectioning commands, `\chapter` and `\part`. We discuss these commands in Section 18.1.1.

In the `samples` folder (see page 4) is the document `legacy-article.tex`, a variant of the introductory sample article, `intrart.tex` of Chapter 4. The first page of this is typeset on the following page.

12.1.1 Top matter

For a detailed discussion of the top matter, refer to Chapter 10, in particular Sections 10.1 and 10.3—see also Figure 10.1. Here is the top matter of the legacy article:

```
\title{A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin\thanks{Research supported
   by the NSF under grant number 23466.}\\
   Computer Science Department\\
   Winnebago, MN 23714\\
   menuhin@cc.uwinnebago.edu}
\date{March 15, 2000}
\maketitle
```

There are four commands for the top matter: `\title`, `\author`, `\thanks`, and `\date`.

Rule ■ Top matter for the `article` document class

1. If necessary, break the title into separate lines with `\\`. Do not put a `\\` at the end of the last line.
2. `\thanks` places a footnote at the bottom of the first page. If it is not needed, omit it.
3. Separate the lines of the address with `\\`. Do not put a `\\` at the end of the last line.
4. Multiple authors are separated by `\and`. There is only one `\author` command, and it contains *all the information*—name, address, support—about *all the authors.* There is no `\\` command before the `\and` command.
5. If there is no `\date` command, LaTeX will insert the date on which you typeset the file (`\date{\today}` will produce the same result). If you do not want *any* date to appear, type `\date{}`. For a specific date, such as February 21, 2007, type `\date{February 21, 2007}`.
6. The `\title` command is the only required command. The others are optional.

A construction of complete-simple distributive lattices

George A. Menuhin*
Computer Science Department
Winnebago, MN 23714
menuhin@cc.uwinnebago.edu

March 15, 2006

Abstract

In this note, we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices in which there are only two complete congruences.

1 Introduction

In this note, we prove the following result:

Theorem 1 *There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.*

2 The Π^* construction

The following construction is crucial in the proof of our Theorem:

Definition 1 *Let D_i, for $i \in I$, be complete distributive lattices satisfying condition* (J)*. Their Π^* product is defined as follows:*

$$\Pi^*(D_i \mid i \in I) = \Pi(D_i^- \mid i \in I) + 1;$$

that is, $\Pi^*(D_i \mid i \in I)$ is $\Pi(D_i^- \mid i \in I)$ with a new unit element.

Notation 1 *If $i \in I$ and $d \in D_i^-$, then*

$$\langle \ldots, 0, \ldots, d, \ldots, 0, \ldots \rangle$$

is the element of $\Pi^*(D_i \mid i \in I)$ whose i-th component is d and all the other components are 0.

*Research supported by the NSF under grant number 23466.

As you see, the rules for the `\date` command here differ slightly from the rules for the `\date` command in the `amsart` document class. However, the rules for the command `\author` here are *very different* from the rules for the `\author` command in the `amsart` document class.

For two authors use the following template:

```
\author{name1\thanks{support1}\\
   address1line1\\
   address1line2\\
   address1line3
   \and
   name2\thanks{support2}\\
   address2line1\\
   address2line2\\
   address2line3}
```

Note the use of the `\and` command, which separates the two authors.

One more difference to keep in mind. Place the abstract *after* the `\maketitle` command.

12.1.2 Options

The `article` and `report` document classes have a similar range of options. These are listed below.

Font size

Options:	`10pt`	*default*
	`11pt`	
	`12pt`	

Each option declares the specified size to be the default font size.

Paper size

Options:	`letterpaper`	(8.5 inches by 11 inches)	*default*
	`legalpaper`	(8.5 inches by 14 inches)	
	`executivepaper`	(7.25 inches by 10.5 inches)	
	`a4paper`	(210 mm by 297 mm)	
	`a5paper`	(148 mm by 210 mm)	
	`b5paper`	(176 mm by 250 mm)	

Draft

Options:	`draft`	
	`final`	*default*

The `draft` option places a slug in the margin next to each line that is too wide (see Section 2.3). The `final` option does not. Note that this option is passed on to some packages, such as `graphicx`. To prevent this, invoke `graphicx` with the `final` option.

Landscape printing

Option: `landscape`

The `landscape` option typesets the document in landscape format, swapping the width and height of the paper.

Two-sided printing

Options: `twoside`
`oneside` *default*

The `twoside` option formats the output for printing on both sides of the paper.

Two-column printing

Options: `twocolumn`
`onecolumn` *default*

The `twocolumn` option typesets the document in two-column format. This option has many problems. It is better to use the `multicol` package (see Section 12.3.1).

Title page

Options: `titlepage` *default* for `report`
`notitlepage` *default* for `article`

The `titlepage` option creates a separate title page and places the abstract on a separate page. The `notitlepage` option places the title and the abstract together on the first page.

Equations and equation numbers

Options: `leqno`
`reqno` *default*

The `leqno` option places any equation number in the document on the left side and `reqno` places them on the right.

Option: `fleqn`

The `fleqn` option sets displayed formulas flush left. This option is typically used in conjunction with the `reqno` option.

[1] Soo-Key Foo.
Lattice Constructions.
PhD thesis, University of Winnebago, Winnebago, MN, December 1990.

[2] George A. Menuhin.
Universal Algebra.
D. Van Nostrand, Princeton, 1968.

[3] Ernest T. Moynahan.
Ideals and congruence relations in lattices. II.
Magyar Tud. Akad. Mat. Fiz. Oszt. Közl., 7:417–434, 1957.

[4] Ernest T. Moynahan.
On a problem of M. Stone.
Acta Math. Acad. Sci. Hungar., 8:455–460, 1957.

[5] Ferenc R. Richardson.
General Lattice Theory.
Mir, Moscow, expanded and revised edition, 1982.

Figure 12.1: The `openbib` option.

Bibliography

Option: `openbib`

The `openbib` option typesets the bibliography in a spread out "open" format (see Figure 12.1).

Combinations

Of course, these options can be combined with each other and are also used by most legacy document classes. For instance,

```
\documentclass[12pt,a4paper,twoside,twocolumn]{report}
```

produces a double-columned, two-sided report on A4 paper, the European standard, at the 12-point font size.

12.2 Letters

The `letter` document class was developed for writing letters. One document can contain any number of letters, each in its own `letter` environment. In the following example (`letter.tex` in the `samples` folder) there is only a single letter:

```
% Sample file: letter.tex
\documentclass{letter}
```

```
\begin{document}

\address{George Gr\"{a}tzer\\
         Department of Mathematics\\
         University of Manitoba\\
         Winnipeg, MB, R3T 2N2\\
         Canada}
\signature{George Gr\"{a}tzer}
\date{}

\begin{letter}{Prof.~John Hurtig\\
               Computer Science Department\\
               University of Winnebago\\
               Winnebago, Minnesota 23714}
\opening{Dear John,}
Enclosed you will find the first draft of the
five-year plan.
\closing{Friendly greetings,}
\cc{Carla May\\
    Barry Bold}
\encl{Five-year plan}
\ps{P.S. Remember our lunch meeting tomorrow! G.}
\end{letter}

\end{document}
```

Figure 12.2 shows the typeset letter.

The argument of the `letter` environment is the name and address of the recipient. It is a required argument and if it is omitted, you get an error message such as

```
! Incomplete \iffalse; all text was ignored
                                        after line 21.
<inserted text>
                \fi
l.21 \end{letter}
```

As with all multiline arguments, the lines are separated by \\.

The arguments of some commands may apply to all the letter environments in the document. Such commands should be placed before the first `letter` environment. In the example, `\signature` and `\address` are so placed.

If the `\date` command is absent, today's date is typeset. If you want no date, use an empty argument `\date{}`, as in the example. If you want all the letters in the same document to have the same date, the `\date` command should precede the first `letter` environment.

George Grätzer
Department of Mathematics
University of Manitoba
Winnipeg, MB, R3T 2N2
Canada

Prof. John Hurtig
Computer Science Department
University of Winnebago
Winnebago, Minnesota 23714

Dear John,

Enclosed you will find the first draft of the five-year plan.

Friendly greetings,

George Grätzer

cc: Carla May
Barry Bold

encl: Five-year plan

P.S. Remember our lunch meeting tomorrow! G.

Figure 12.2: A letter.

Many of the options listed in Section 12.1.2 can also be invoked for the `letter` document class.

12.3 The LaTeX distribution

The LaTeX distribution contains a number of document classes and packages, most of which you have probably received with your TeX software. If you find that you are missing some files, see Section E.1 on how to get them.

The files of the LaTeX distribution on CTAN are grouped in the directory

`/pub/tex/macros/latex`

into four subdirectories.

`base` contains all the files necessary to install the system. As a rule, for every package, say, `exscale`, it contains two files, `exscale.ins` and `exscale.dtx`. Typesetting the first gives you `exscale.sty` and typesetting the second produces the user guide and the commented source code. Since most LaTeX implementations install the content of the `unpacked` directory, this directory is not for the average user.

`doc` contains LaTeX documentation in PDF files and also the LaTeX News.

`required` contains the directories `amslatex`, `babel`, `cyrillic`, `graphics`, `psnfss`, `tools`.

`unpacked` contains the unpacked LaTeX distribution. Since most LaTeX implementations install this, you may never need it.

Of the packages and `tex` files included in the `unpacked` folder, the following should be of special interest to readers of this book.

`latexsym` Some symbol definitions (see the tables in Appendix B).

`alltt` The `alltt` environment, which is like the `verbatim` environment except that `\`, and `{`, `}` retain their usual meanings.

`exscale` Scaled versions of the math extension font.

`makeidx` Commands for producing indexes (see Chapter 17).

`showidx` A package to allow you to typeset the index entries in the margin of your typeset document (see Section 17.1).

`nfssfont.tex` Generates font tables for use with the `\symbol` command (see Section 5.4.4).

There is also the file `fixltx2e.sty` in the `unpacked` directory (and the corresponding `fixltx2e.dtx` and `fixltx2e.ins` in the `base` directory). This file contains fixes to `latex.ltx`, the main LaTeX file, and also some new commands that did not make it into the current release. The last `fixltx2e.sty` (Dec. 2005) contains two important additions. It complements the `\textsuperscript` command (see Section C.4) with a `\textsubscript` command.

More importantly, it introduces a very useful new command `\TextOrMath`. This command has two arguments and it typesets the first in text and the second in math. For instance, if in `newlattice.sty` (see 15.3) you define

```
\newcommand{\Gra}{\TextOrMath{$\alpha$\xspace}{\alpha}}
```

then you can type `\Gra` in both test and math. Indeed.

```
this is \Gra in text, and this is $\Gra - x^2$ in math
```

typesets as

this is α in text, and this is $\alpha - x^2$ in math

If you want to use these commands, include the line

```
\usepackage{fixltx2e}
```

in the preamble.

In the `required` folder there are some major software distributions related to LaTeX.

`amslatex` Discussed in detail in this book, this directory contains the AMS math packages and document classes, while the font-related AMS files are in the directory

`/tex-archive/fonts/amsfonts/latex/`

`babel` For typesetting languages other than American English.

`cyrillic` For typesetting Cyrillic characters.

`graphicx` For the inclusion and transformation of graphics and for typesetting in color (see Section 10.4.3). This package requires that you have a suitable printer driver.

`psnfss` For typesetting with a wide range of PostScript fonts (see Section F.1).

`tools` A range of tools for managing document production discussed in the next section.

Each of these packages comes with its own documentation. They are also described in *The LaTeX Companion,* 2nd edition [46].

12.3.1 Tools

Some of these packages are so important that they could well have been incorporated into LaTeX proper. Here is a brief listing.

`afterpage` Implements the `\afterpage` command. The commands specified in its argument are expanded after the current page is output.

`array` Contains extended versions of the `array` and `tabular` environments with many extra features.

`bm` Gives access to bold math symbols.

`calc` Allows algebraic manipulation of lengths and counter values when specifying lengths and counters.

`dcolumn` Provides alignment on decimal points in tabular entries. It requires the `array` package.

`delarray` Adds "large delimiters" around arrays. It requires the `array` package.

`enumerate` Provides customized `enumerate` environments (see Sections 6.2.4 and also Sections 15.2.1, 15.3, 15.4).

`fileerr` Helps with missing files.

`fontsmpl` Produces a test file for displaying "font samples".

`ftnright` Places all footnotes in the right-hand column of documents typeset with the `twocolumn` document class option.

`hhline` Provides control over horizontal lines in tables.

`indentfirst` Indents the first paragraph of each section.

`layout` Shows the page layout defined by a document class (see Section 10.6).

`longtable` Helps to create multipage tables. It does not require the `array` package, but it uses `array`'s extended features if both packages are loaded.

`multicol` Provides multicolumn typesetting with some advanced features.

`rawfonts` Preloads fonts using the old font names of LaTeX 2.09.

`showkeys` Selectively prints the labels used by `\label`, `\ref`, `\cite`, and so forth, in the margin (see Section 10.4.2).

`somedefs` Elective handling of package options. It is used by the `rawfonts` package.

`tabularx` Defines a variant of the `tabular` environment where all the columns are the same width. It requires the `array` package.

`theorem` Allows the definition of proclamations in flexible formats. The AMS variant, the `amsthm` package, is discussed in Section 6.4.2.

`trace` Tracing help for macro writers.

`varioref` Provides smart as well as multilingual handling of page references.

`verbatim` Extends the `verbatim` environment and provides the `comment` environment (see Sections 5.5.1 and 6.8).

`xr` Creates cross-references among documents.

`xspace` Provides a "smart space" command that helps you avoid the common mistake of missing space after commands. It is mainly used in commands that expand to some text (see Section 15.1.1).

All of these packages are discussed in *The LaTeX Companion,* 2nd edition [46].

CHAPTER

13

PDF documents

13.1 PostScript and PDF

13.1.1 PostScript

PostScript is the preeminent platform and device independent page-description and programming language, introduced by Adobe Systems Inc. It describes the placement and shapes of all the elements in the document, including the fonts. Documents placed on the Web in PostScript format can be downloaded to any computer and print identically on all PostScript printers. Until the appearance of PDF, PostScript was the format of choice for sharing LaTeX articles with diagrams or complex forms. There are a number of disadvantages to using PostScript files on the Web:

- The files tend to be very large.
- They cannot be viewed until the whole file has been downloaded.
- If a PostScript file does not include a particular font used in the document and you do not have that font installed on your computer, then another font—usually Courier—is substituted causing graphically unacceptable rendering.

13.1.2 PDF

All of these concerns have been addressed by Adobe's Portable Document Format (PDF). See Adobe Systems' *PDF Reference, Version 1.6,* 5th edition [2] for a complete description of this file format.

PDF is based on the PostScript language, with some important differences:

- PDF is much more concise than PostScript. A PDF file is normally about 10 percent of the size of the corresponding PostScript file.
- Missing fonts are usually substituted by fonts with the same metrics, so that the size of the substituted text is the same as that of the original. In particular, there are no incorrect line breaks caused by the substitution.
- PDF files allow *partial inclusion of fonts.* As a result, it is much easier to obtain permission to include proprietary fonts in PDF documents.
- PDF files can be downloaded and viewed in a Web browser one page at a time, without having to wait for the whole file to download first.
- Many LaTeX implementations, including the two discussed in Appendix A, produce PDF files.

PDF files and Adobe Acrobat Professional offer many nice features, including:

- Efficient navigational tools
- Searching and indexing capability for documents and even for collections of documents
- Bookmarks
- Thumbnails of pages
- Limited editing
- Annotations (notes, text, and voice) and markups
- Hyperlinks to the same document or to another document or Web site (see Section 13.1.3)
- The inclusion of programs, particularly JavaScript
- The creation of interactive features
- The inclusion of multimedia objects such as video and sound files

If you use a LaTeX implementation that produces the typeset file in PDF format, then you already have the file you need. If not, the typeset file will be a DVI file,

and you have to convert it to PDF format. Usually, this is a two step process. First you convert the DVI file to PostScript and then from PostScript to PDF.

On a Mac, just click on a PostScript file and it is converted to PDF.

If you have a PostScript printer, you can "print to file" to create the PostScript version. To convert from Postscript to PDF, you need special software such as Adobe Acrobat Professional—free utilities to do this are also available for all operating systems. When downloaded, a PDF file can be read and printed using Adobe Reader (or some other PDF viewer). Adobe Reader is available from Adobe free of charge for a PC, Mac, and some UNIX variants (see Section E.1 on how to get it).

PDF files can also be used to make legacy documents available on the Internet. For instance, if you go to my home page,

`http://www.maths.umanitoba.ca/homepages/gratzer/`

and click on `Mathematical articles,` then `1980-89,` in the bottom frame you will find entry `102,` which links to a PDF file. I created that PDF file by scanning the pages of the original article, converting them to PDF files (with Adobe Photoshop), and finally stringing them together into a single document (using Adobe Acrobat Professional). The scanned pages totalled 32 MB, the PDF file is 320 KB. The printed version of the PDF file is somewhat lower in quality than the original, but it is still quite satisfactory. See my article [32] on some practical pointers about scanning and PDF files.

13.1.3 Hyperlinks

With Adobe Acrobat Professional you can place *hyperlinks* in PDF documents. Clicking on a hyperlink, you jump to another location in the same document, to an electronic document, or to a Web site. For instance, in the table of contents, you can put a hyperlink to Chapter 3, so that clicking on it takes you to Chapter 3. Adobe Acrobat's help system has ample information on how to set up links.

13.2 Hyperlinks for LaTeX

It is tedious to set hyperlinks one at a time in your PDF file. Would it not be nice if hyperlinks corresponding to cross-references were set automatically? For instance, clicking on Lemma 6 in

> This follows from Lemma 6 and the relevant definitions.

would cause the display to jump to the page containing Lemma 6.

Sebastian Rahtz's `hyperref` package (maintained now by Heiko Oberdiek) does just that (see Section E.1 on how to get it).

13.2.1 *Using* hyperref

You invoke the hyperref package with the command

```
\usepackage{hyperref}
```

as the *last* \usepackage line in the preamble of your LaTeX document. If this does not do the job, try this format, specifying the printer driver:

```
\usepackage[driver]{hyperref}
```

The *driver* is one of hypertex, dvips, dvipsone, ps2pdf, tex4ht, pdftex, dvipdf, dvipdfm, dvipdfmx, dviwindo, vtex, textures. If none of these work, you are out of luck.

Figure 13.1 shows a page fragment from a mathematical article with hyperlinks to some sections, theorems, and citations automatically created by hypertex.

The construction of the uniquely complemented lattice representing a given monoid is introduced in Section 4. It is based on V. Koubek and J. Sichler [12]. Section 5 proves that this construct has many simple sublattices. Finally, in Section 6, we put all these pieces together to construct the lattice L for the Main Theorem.

To prove Theorem 1, we need a different construction, which is presented in Section 7.

Figure 13.1: The hyperref package with the \autoref command.

See Section 13.2.4 for the autoref command. To see how hypertex works, look up the sampart-ref.tex article in the samples folder. It is the sample article enhanced with the hyperref package. The article uses the hyperref options

```
pagebackref,colorlinks,bookmarks=true
```

See Section 13.2.2 for the pagebackref and colorlinks options. The third option, bookmarks=true, is discussed in Section 13.2.3.

Copy sampart-ref.tex into the work folder and typeset it twice. The PDF file created for you has some of the hyperref features, but not all. Open the pdf file with Adobe Reader. Look at the left pane. Bookmarks is a table of contents of the article, with links to the named sections. Pages is a thumbnail sketches of the pages, with links to them.

13.2.2 backref and colorlinks

A useful addition to hyperref is David Carlisle's backref package. It is invoked as an option of hyperref:

```
\usepackage[backref]{hyperref}
```

The items in your bibliography will be followed by a list of sections in which the bibliographic reference is cited. Each number printed after the cited reference becomes a hyperlink to the relevant section. Alternatively, you can use the `pagebackref` option, which produces a list of page numbers. Figure 13.2 shows a page fragment from a bibliography displaying lists of section numbers. `backref` can be used to check if all items in the bibliography have actually been referenced in the article. Any reference that has not been cited does not have a page listed.

[10] G. Grätzer and J. Sichler, *On the endomorphism semigroup (and category) of bounded lattices*, Pacific J. Math. **35** (1970), 639–647. 1, 1
[11] ———, *On the endomorphism monoid of complemented lattices*, AMS Abstract 97T-06-98. 1
[12] V. Koubek and J. Sichler, *Universality of small lattice varieties*, Proc. Amer. Math. Soc. **91** (1984), 19–24. 1, 2, 4, 4.2, 4.3, 4.3, 4.3, 7
[13] H. Lakser, *Simple sublattices of free products of lattices*, Abstract, Notices Amer. Math. Soc. **19** (1972), A 509. 1, 3, 3

Figure 13.2: The `hyperref` package with the `backref` option.

Another popular option is `colorlinks`, which colors the text of the links instead of underlining them.

13.2.3 Bookmarks

An important navigational feature of Acrobat is the ability to set and use bookmarks. If you choose `View>Navigation Tabs>Bookmarks` in Adobe Reader, the navigation pane opens up showing the bookmarks.

For a sophisticated example, in Adobe Reader, view Adobe Reader Help, the menu item `Help>Adobe Reader Help...`. The bookmarks form a table of contents. Clicking on a chapter title bookmark displays the first page of the chapter or its table of contents in the main pane. Click on the triangle next to the left of the chapter title bookmark. It opens up the chapter title to show the sections within the chapter, which are links to the sections.

The `hyperref` package option `bookmarks=true` makes bookmarks from the sectioning commands of the LaTeX document, thereby producing a table of contents even if the document had none. You can invoke all these options together:

```
\usepackage[backref,colorlinks,bookmarks=true]{hyperref}
```

Typesetting your LaTeX document with the `bookmarks=true` option produces an `out` file, which contains entries such as

```
\BOOKMARK [1][-]{section.1}{1. Introduction}{}
\BOOKMARK [1][-]{section*.2}{References}{}
```

Once you have produced the final version of your document, you should edit this file to make sure that it contains no LaTeX code. Math formulas in titles create havoc. So do

accented characters. hyperref does its best to convert internal encodings for accented characters to the encoding used by Acrobat Reader, but it is still best to avoid them. Once this file has been edited, add the line

```
\let\WriteBookmarks\relax
```

at the start of the file to prevent it from being overwritten.

13.2.4 Additional commands

The hyperref package has dozens of commands and parameters, but we will discuss only four more commands.

Preventing links

If you do not want a \ref or \pageref command to appear as a link, you can use their *-ed forms, \ref* and \pageref*.

Long links

An often heard complaint is that in the link Theorem 6, only the 6 can be clicked to activate the link, and it is too short. hyperref provides the \autoref command to help out. Instead of

```
Theorem~\ref{T:new}
```

you can simply type

```
\autoref{T:new}
```

and hyperref will provide the word Theorem so that the link becomes Theorem 6. The names supported by the \autoref command are listed in Table 13.2.4.

For my own use, I redefine:

```
\renewcommand{\chaptername}{Chapter}
\renewcommand{\sectionname}{Section}
\renewcommand{\subsectionname}{Section}
\renewcommand{\subsubsectionname}{Section}
```

External links

External links can be links to websites or other files that are located on the Internet. Use the

```
\href{address}{text}
```

Command	Meaning
\figurename	Figure
\tablename	Table
\partname	Part
\appendixname	Appendix
\equationname	Equation
\Itemname	item
\chaptername	chapter
\sectionname	section
\subsectionname	subsection
\subsubsectionname	subsubsection
\paragraphname	paragraph
\Hfootnotename	footnote
\AMSname	Equation
\theoremname	Theorem

Table 13.1: Redefinable names supported by \autoref.

command to typeset *text* and make it into a link to the Web address (URL).

For instance, in your references, you may have

```
Robert Miner and Jeff Schaefer,
 \emph{Gentle intoduction to MathML.}\\
 \href{http://www.webeq.com/mathml/gitmml/}
{http://www.webeq.com/mathml/gitmml/}
```

Then the last line of the address becomes a link and clicking on it takes you to the Web site. As an even fancier example, note the top matter command \urladdr (see Section 11.2.2) in sampart-ref.tex:

```
\urladdr{\href{http://math.uwinnebago.edu/menuhin/}
http://math.uwinnebago.edu/homepages/menuhin/}
```

Then, as part of Menuhin's address, you will find

```
http://math.uwinnebago.edu/menuhin/
```

Now clicking on the Web address will link to his Web page.

hyperref, of course, offers a lot more than I have presented here. For more detail, see the user manual and *The LaTeX Web Companion* [18].

CHAPTER

14

Presentations

In Section 4.4, we describe how a *presentation* is a PDF file that you open with Adobe Reader. You can put it in full screen mode[1] (`View>Full screen`), and then project the presentation one page at a time by pressing the space bar or the arrow keys.

Remember overhead transparencies? If we want to see half of what is on the transparency, we cover up the bottom part so that only the top part is projected. This way we have control over what the audience sees and when. We sometimes used overlays: placing another transparency on top of the projected one to modify it by adding text or graphics.

In this chapter, we discuss Till Tantau's `beamer` package to help you prepare presentations with overlays and with stunning visual effects. `beamer` relies on other packages such as the `hyperref` package (see Section 13.2) to establish links, Till Tantau's Portable Graphics Format package for creating graphics, Uwe Kern's `xcolor` package for coloring, the AMS packages for formatting math formulas and defining declarations, and some others.

The documentation for these packages runs to about a thousand pages. The good news is that you can use `beamer` "out of the box". You only have to learn about **20**

[1] If you have Adobe Acrobat Pro, open `File>Document Properties` and check mark `Full Screen Mode`. Then the PDF document automatically opens in full screen mode.

commands—this is more than the **one** new command we had to learn in Section 4.4 but still an easily manageable task.

So we set ourselves in this chapter a modest goal, using `beamer` "out of the box". It is amazing how much you can achieve with a small investment of your time.

Getting started First, you need to install `beamer`. If you installed `MikTeX` for your PC or `TeXShop` for your Mac as described in Appendix A, `beamer` is already installed for you. Otherwise, consult Section E.1 on how to get it.

Second, the `tex` file created for `beamer` has to be turned into a PDF file to make it into a presentation. For `MikTeX`, click on the `PDF TeXify` icon and for `TeXShop`, just click on `Typeset`. For other TEX installations, check the user manual on how to create a PDF output.

14.1 *Quick and dirty* `beamer`

We convert the article `intrart.tex` (in the `samples` folder) to a `beamer` presentation. We will remove some commands that are appropriate for an article but not for a presentation and add some commands—such as the frame commands—that are specific to presentations. This will not produce a very good presentation. Nevertheless, the conversion is a really quick introduction to some basic `beamer` concepts.

14.1.1 *First changes*

Open `intrart.tex`, save it as `quickbeamer.tex` in the `work` folder. The converted `tex` version and the presentation `quickbeamer.pdf` are both in the `samples` folder.

Make the following changes in the preamble and top matter:

1. Change the first line to
   `% Introductory beamer presentation: quickbeamer.tex`
2. Change the documentclass to `beamer`.
3. Delete the six `\usepackage` and `\newtheorem` lines—`beamer` loads the necessary packages and defines these declarations.
4. Change the `\address` to `\institute`—this is the `beamer` command for address.
5. Delete the `abstract` environment—this is not needed for the presentation.

Here is the new version of the preamble and top matter.

```
%Introductory beamer presentation: quickbeamer.tex
\documentclass{beamer}
\begin{document}
\title{A construction of complete-simple\\
```

```
       distributive lattices}
\author{George~A. Menuhin}
\institute{Computer Science Department\\
         University of Winnebago\\
         Winnebago, MN 53714}
\date{March 15, 2006}

\maketitle
```

14.1.2 Changes in the body

1. Delete the `notation` and `proof` environments, but not the contents, that is, delete the four lines

   ```
   \begin{notation}
   \end{notation}
   \begin{proof}
   \end{proof}
   ```

   Both environments could theoretically stay, but the `notation` environment is not needed since in the next step we put `Notation` in the frame title. The `proof` environment is not suitable for presentations because it can only be used within a frame (see Section 5.3.2).

2. Cut the presentation into *frames* (pages, transparencies, foils) with the `frame` environments. After each `\begin{frame}` we put a `\frametitle` command. The argument of the command is the "title" for the frame, displayed prominently at the top of the display.

   It would be tedious to give you precise instructions on how to do this, instead refer to the `quickbeamer.tex` document (in the `samples` folder) for all the `frame` environments and `\frametitle` commands we have added.

3. Cut out the `figure` environment, except for the line

   ```
   \centering\includegraphics{products}
   ```

   which should be moved to follow the

   ```
   \frametitle{Illustrating the construction}
   ```

   line and accordingly delete `(see Figure~\ref{Fi:products})`.

Now copy over the illustration `products` from the `samples` folder to the `work` folder and typeset. That's it, enjoy your first presentation.

14.1.3 Making things prettier

Now you make some small changes to `quickbeamer.tex` to utilize `beamer`'s power for wonderful effects. Changes 1 and 3 are quite dramatic.

Save `quickbeamer.tex` with the name `quickbeamer1.tex` in the `work` folder. The edited version,`quickbeamer1.tex`, is in the `samples` folder along with the presentation `quickbeamer1.pdf`.

1. Add `\usetheme{Berkeley}` after the documentclass line.

2. Change `\maketitle` to

   ```
   \begin{frame}
     \titlepage
   \end{frame}
   ```

   Make sure that the last (sub)section is followed by a frame, otherwise it will be missing from the table of contents.

3. Add this frame after the titlepage frame:

   ```
   \begin{frame}
   \frametitle{Outline}
   \tableofcontents[pausesections]
   \end{frame}
   ```

   This creates a table of contents frame, with the section titles appearing one at a time.

4. Replace all instances of `{equation}` by `{equation*}`. In a presentation a reference to another frame is not recommended so equations should not be numbered. You might as well delete all the `\label` commands since these are not needed either.

5. In the second to last frame there are two references to equation numbers. Replace the text `the congruence \eqref{E:cong2}` with `the congruence`, and also replace `\eqref{E:comp}` with `the penultimate equation`, or similar.

6. Change the bibliographic reference to
   `See also Ernest T. Moynahan, 1957.`

Turning `quickbeamer1.tex` into a PDF file will get you a much prettier presentation. The first four pages of the new presentation are displayed in Figures 14.1 and 14.2—unfortunately, without the pretty colors.

14.1.4 Adjusting the navigation

Looking at Figures 14.1 and 14.2, we see that the `Berkeley` theme turns the sidebar into a navigation device and the section titles produce the table of contents (the Outline frame). Remember to typeset a few times! But a number of problems come to light.

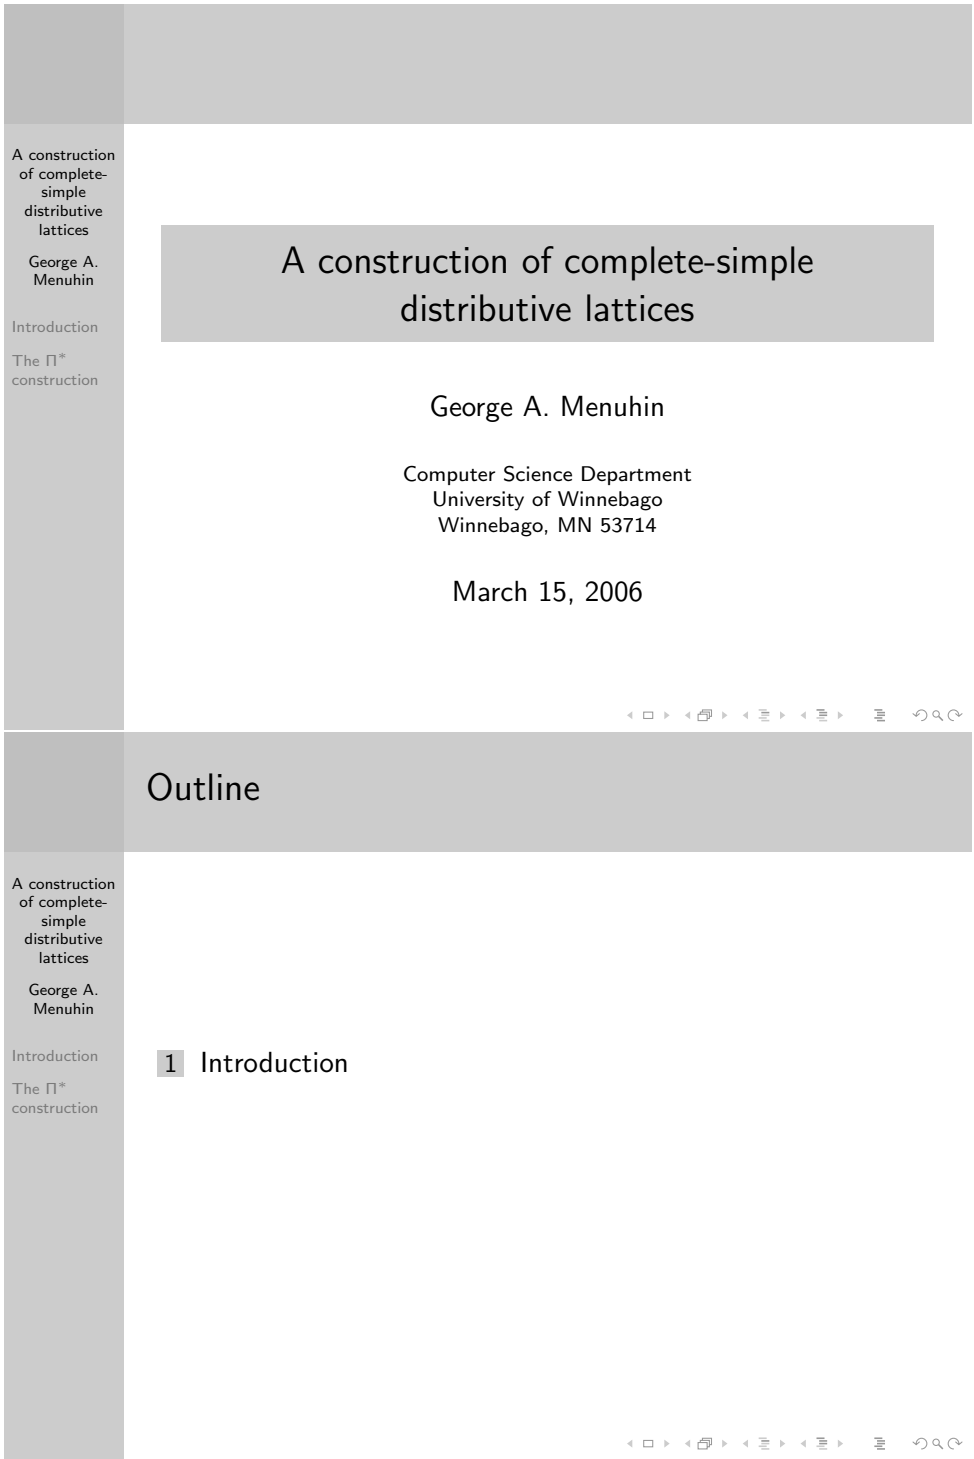

Figure 14.1: `quickbeamer1` presentation, pages 1 and 2.

Outline

1 Introduction

2 The Π* construction

Introduction

In this note, we prove the following result:

Theorem

There exists an infinite complete distributive lattice K with only the two trivial complete congruence relations.

Figure 14.2: `quickbeamer1` presentation, pages 3 and 4.

1. The title of the presentation is too long for the sidebar, so is the title of the second section.

2. There is no need to repeat the author's name in the sidebar.

3. It was natural for the article `intrart.tex` to have only two sections. But sections play a different role in a `beamer` presentation, they are navigation tools. The sidebar lists all the sections. It also highlights the section we are in. Moreover, by clicking on the name of a section, the presentation jumps there.

To correct these deficiencies, save the file `quickbeamer1.tex` as `quickbeamer2.tex` in the `work` folder. The edited version is in the `samples` folder along with the PDF file.

1. Change the `\title` command to

   ```
   \title[Complete-simple distributive lattices]%
   {A construction of complete-simple\\
   distributive lattices}
   ```

   and the second `\section` command to

   ```
   \section[Construction]{The $\Pi^{*}$ construction}
   ```

   The bracketed parts are the short versions used in the sidebar.

2. Change the `\author` command to

   ```
   \author[]{George~A. Menuhin}
   ```

   The short version of the `author` command is blank, so the author's name will not be displayed in the sidebar.

3. Add the command

   ```
   \section[Second result]{The second result}
   ```

   before the frame of the same title and

   ```
   \section{Proof}
   ```

   before the proof. We even add

   ```
   \section{References}
   ```

   before the frame of the same name.

Figure 14.3 shows page 7 of the `quickbeamer2` presentation—this corresponds to page 4 of the `quickbeamer1` presentation; the Outline accounts for the difference. Note how all the deficiencies listed above have been corrected. Compare page 7 of this presentation with the `Berkeley` theme in Figure 14.3 and with the `Warsaw` theme in Figure 14.4. Themes are discussed in Section 14.5.

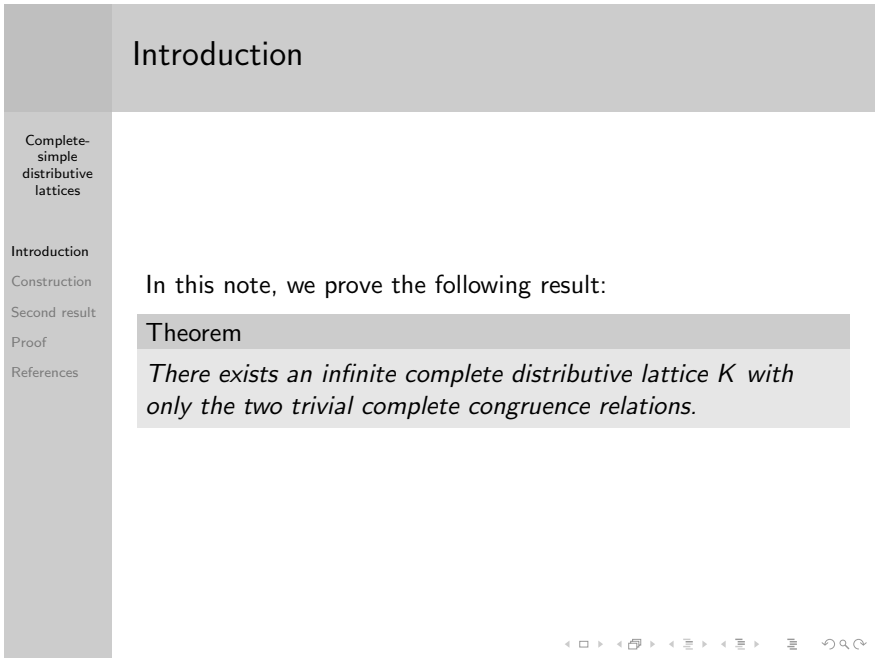

Figure 14.3: `quickbeamer2` presentation, page 7 with `Berkeley` theme.

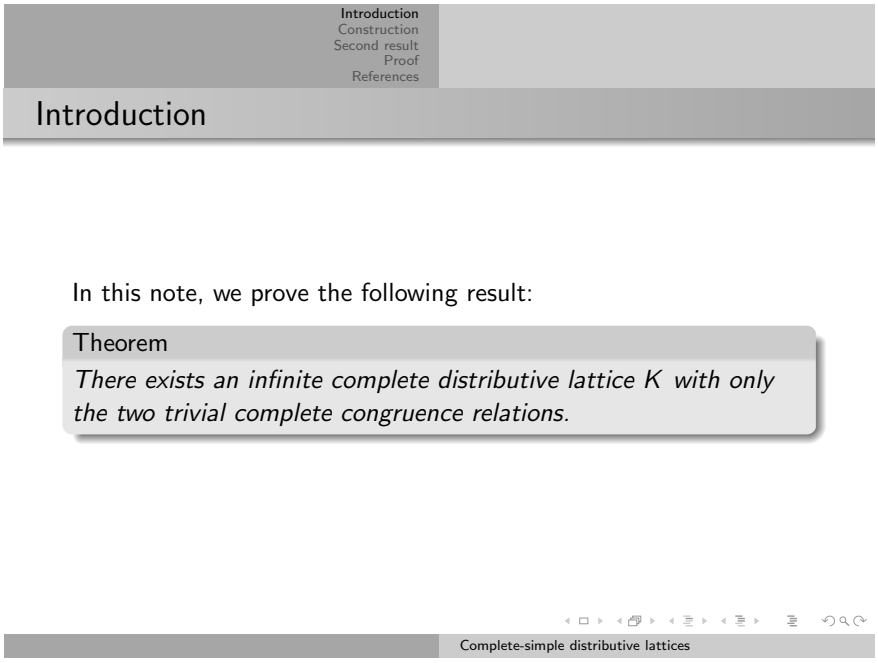

Figure 14.4: `quickbeamer2` presentation, page 7 with `Warsaw` theme.

14.2 *Baby* beamers

In the previous discussions you may have noticed two interesting features. First, the Outline frame (table of contents) created *two* pages in the `quickbeamer1` presentation and *five* pages in the `quickbeamer2` presentation. We discuss this in some detail now with the `babybeamer` presentations. You can find all the `babybeamer` presentations as `tex` and PDF files in the `samples` folder. Second, the sidebar shows some links. More about this in Section 14.2.7.

14.2.1 Overlays

The outline frame of the `quickbeamer2` presentation created five pages in the PDF file. Observe how each page, from the second on, completely overlaps the previous one, making it appear that the previous one stayed put and an additional line is displayed "on top of it". In `beamer` terminology these pages are *overlays* or *slides*. The five overlays will be referenced as overlay 1, ..., overlay 5. A single frame may create one or many overlays. The subsequent sections discuss many more variants.

`beamer` has many commands creating overlays. We start with some examples of `\pause`, then `\only`, and `\onslide`.

We introduce overlays with some presentations. The first, `babybeamer1`, introduces the `\pause` command to create overlays.

```
% babybeamer1 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Some background}

We start our discussion with some concepts.
\pause

The first concept we introduce originates with Erd\H os.
\end{frame}
\end{document}
```

produces the presentation of Figure 14.5.

Rule ■ The `\pause` command

1. A frame may have many `\pause` commands.

2. The `\pause` command cannot be given in an AMS multiline math environment.

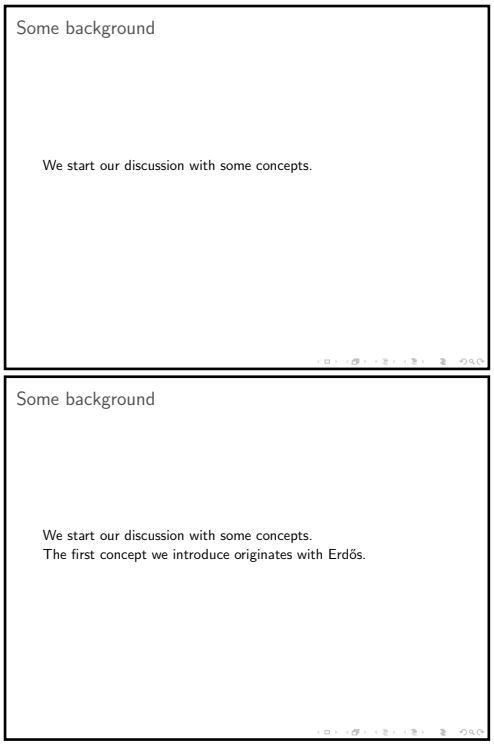
Some background
We start our discussion with some concepts.
Some background
We start our discussion with some concepts.
The first concept we introduce originates with Erdős.

Figure 14.5: `babybeamer1` presentation.

You move past a `\pause` command the same way as you get to the next frame, by pressing the space bar or the forward arrow key.

Using the `\pause` commands you can create many overlays, each containing a little more material on the overlays. If this is all you need, skip to Section 14.2.7, you do not need the more detailed discussion of overlays in the next few pages.

We could have coded the same presentation with the `\only` command:

```
% babybeamer2 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Some background}

\only<1,2>{We start our discussion with some concepts.}

\only<2>{The first concept we introduce originates
         with Erd\H os.}
```

```
\end{frame}
\end{document}
```

This presentation is slightly different from `babybeamer1`. Overlay 1 ignores the second `\only` command and displays the line as appropriate to display one line. Overlay 2 displays the two lines as appropriate to display two lines. As a result, the first line moves slightly up when passing from overlay 1 to overlay 2. The argument of the `\only` command is typeset only on the overlays specified. On the other overlays, it is ignored.

If instead of the `\only` command you use the `\onslide` command (on slide, get it?), as in

```
\onslide<1,2>{We start our discussion with some concepts.}

\onslide<2>{The first concept we introduce originates
         with Erd\H os.}
```

then the first line of overlay 2 completely overlaps the first line of overlay 1, so the first line seems to stay put. The argument of the `\onslide` command is typeset on the overlays specified and on the other overlays it is typeset but invisible. This is the behavior you would want most often, but you may find that sometimes you prefer `\only`.

14.2.2 Understanding overlays

In Section 14.2.1 we introduced overlays, probably the most important new concept for presentations. LaTeX typesets the content of a frame and the typeset material

- appears on all overlays for the parts of the source (maybe all) not modified by any command with an overlay specification;
- appears only on the overlays specified and is ignored on the other overlays for the arguments of the `\only` commands;
- appears on the overlays specified and is typeset but made invisible on the other overlays for the arguments of the `\onslide` commands.

More on overlay specifications at the end of this section.
Here are some illustrations.

Example 1

```
This is a very \only<1>{very, very} important concept.
\only<1,2>{To start the definition \dots}
```

will typeset overlay 1 as

This is a very very, very important concept. To start the definition ...

and will typeset overlay 2 as

This is a very important concept. To start the definition ...

Example 2

```
What is $2+2$? It is \onslide<2>{$4$}.
\only<1>{Can you figure it out?}

\onslide<2>{I hope you all got it right.}
```

will typeset overlay 1 as

What is $2+2$? It is . Can you figure it out?

and will typeset overlay 2 as

What is $2+2$? It is 4.
I hope you all got it right.

Note that there is room in overlay 1 for the number 4.

Example 3

```
What is $2+2$?

\onslide<2>{It is {$4$}.}

Can you figure it out?
```

will typeset overlay 1 as

What is $2+2$?

Can you figure it out?

and will typeset overlay 2 as

What is $2 + 2$?
It is 4.
Can you figure it out?

Note that there is room in overlay 1 for the "missing" second line.

Overlay specifications

The angle brackets contain the *overlay specification*. Here are some more examples:

`<1-2,4->`	means all overlays from 1 to 2, and all overlays from 4 onwards.
`<-3>`	means all overlays up to 3.
`<2,4,6>`	means overlays 2, 4, and 6.

In the presentation `babybeamer2` we have two overlay specifications: `<1,2>` and `<2>`. Maybe, `<1->` and `<2->` would be better, so that if you add a third overlay you do not have to change these.

The command `\pause` can only take the simplest overlay specification, a number. `\pause<3>` takes effect from overlay 3 on.

Note that overlay specifications are attached to commands but the overlays created are overlays of the frame in which the commands appear.

14.2.3 More on the `\only` and `\onslide` commands

The `\only` and `\onslide` commands can accomplish everything the `\pause` command can and a lot more.

The basic syntax

The syntax of `\only` is

`\only<`*`overlay spec`*`>{`*`source`*`}`

where *`overlay spec`* is the overlay specification and *`source`* is the code typeset by LaTeX.

A (partial) syntax of `\onslide` is

`\onslide<`*`overlay spec`*`>{`*`source`*`}`

With the same syntax you can give overlay specifications to many commands, including `\textbf`, `\textit`, `\alert`—`beamer`'s alternative to the `\emph` command—and then the command is in effect only on the overlays specified.

```
% babybeamer3 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Some background}

\textbf<1>{We start our discussion with some concepts.}

\textbf<2>{The first concept we introduce originates
          with Erd\H os.}
\end{frame}
\end{document}
```

So the babybeamer3 presentation (see Figure 14.6) has two overlays, each with two lines of text. On overlay 1 the first line is bold, on overlay 2 the second line is bold.

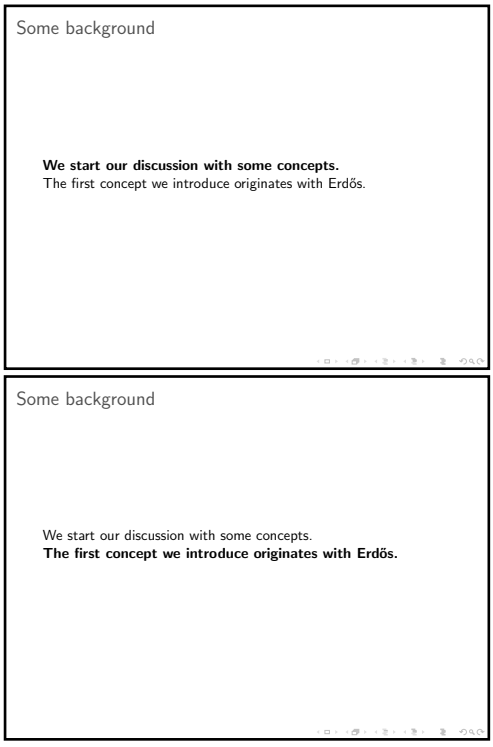
Some background
We start our discussion with some concepts.
The first concept we introduce originates with Erdős.
Some background
We start our discussion with some concepts.
The first concept we introduce originates with Erdős.

Figure 14.6: babybeamer3 presentation.

A different syntax

The command \only has an alternate syntax:

\only{*source*}<*overlay spec*>

So

```
\only<1>{Can you figure it out?}
```

and

```
\only{Can you figure it out?}<1>
```

accomplish the same.

With this syntax, you can define your own commands that allow overlay specifications. For instance, using the command \color{blue} defined in Section 14.2.9, you can define the command

```
\newcommand{\myblue}{\only{\color{blue}}}
```

Then

```
\myblue<2>{Some more text}
```

will color the text blue on overlay 2 only.

14.2.4 Lists as overlays

Lists may be presented one item at a time, for example the babybeamer4 presentation in Figure 14.7 (in the samples folder) shows the four overlays of a list. R. Padmanabhan appears on the first, R. Padmanabhan and Brian Davey appear on the second, and so on. This is accomplished simply by adding the overlay specification <1-> to the item for R. Padmanabhan, the overlay specification <2-> to the item for Brian Davey, and so on.

```
% babybeamer4 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Overlaying lists}

We introduce our guests:
\begin{itemize}
\item<1-> R. Padmanabhan
\item<2-> Brian Davey
```

Figure 14.7: `babybeamer4` presentation.

```
\item<3-> Harry Lakser
\item<4-> Dick Koch
\end{itemize}
\end{frame}
\end{document}
```

Such an overlay structure is used so often that beamer has a shorthand for it, [<+->]. Here it is in babybeamer5.

```
% babybeamer5 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Overlaying lists}

We introduce our guests:
\begin{itemize}[<+->]
\item R. Padmanabhan
\item Brian Davey
\item Harry Lakser
\item Dick Koch
\end{itemize}
\end{frame}
\end{document}
```

This shorthand allows adding and reordering items without having to change overlay specifications.

Of course, if you do not want the items to appear in sequence, you have to use overlay specifications.

14.2.5 Out of sequence overlays

We now present an example of "out of sequence overlays". Look at Figure 14.8. I want to make this part of my presentation. First, I want to show the theorem, then illustrate it with the diagram at the bottom. Finally, I present the proof in the middle. So I need three overlays.

The theorem is on all three overlays, 1, 2, 3. Its illustration is on overlays 2 and 3, leaving room for the proof that appears only on overlay 3.

This is an example of "out of sequence overlays". We code this in babybeamer6 (in the samples folder).

Since declarations, proofs, and the \includegraphics command may all have overlay specifications, this seems easy to accomplish.

```
% babybeamer6 presentation, first try
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Overlaying declarations and graphics}
\begin{theorem}<1->
Every finite distributive lattice can be embedded
in a boolean lattice.
\end{theorem}
\begin{proof}<3->
Use join-irreducible elements.
\end{proof}
\includegraphics<2,->{cube}
\end{frame}
\end{document}
```

This does not work too well. On overlay 1 the theorem appears in the middle and then it jumps up to make room for the illustration. This is the same problem we encountered in the `babybeamer2` presentation in Section 14.2.1 and the solution is also the same, the use of the `\onslide` command. Replace the line

```
\includegraphics<2,->{cube}
```

with

```
\onslide<2->{\includegraphics{cube}}
```

Theorem

Every finite distributive lattice can be embedded in a boolean lattice.

Proof.

Use join-irreducible elements.



Figure 14.8: The slide to represent.

14.2.6 Blocks and overlays

You can think of a theorem in beamer as the contents of the theorem environment with a heading and, optionally, with an overlay specification, and with most themes—see Section 14.5—colorful visual highlighting, see Figures 14.3 and 14.4.

beamer provides the block environment that works the same way except that you name the block. The (partial) syntax of the block environment is

```
\begin{block}<overlay spec>{title}
source
\end{block}
```

Blocks are shaped as theorems. If there is no title, you still need the braces. The overlay specification is optional.

As an example, save babybeamer6.tex as babybeamer6block.tex in the work folder (also in the samples folder along with the PDF file) and replace the theorem environment with

```
\begin{block}<1->{Theorem}
  Every finite distributive lattice can be embedded
in a boolean lattice.
\end{block}
```

If you want a block of LaTeX code with an overlay specification but with no title and no visual highlighting, use one of the commands, \onslide and \only.

14.2.7 Links

A presentation is a PDF file, so it is not surprising that you can set links of various types in a beamer presentation. Just as the hyperref package helps us with hyperlinks in a PDF file (see Section 13.2), the beamer package allows us to conveniently set links in a presentation.

Some links are automatically provided. If you look closer at Figures 14.1 and 14.2, you see that the section titles are shown in the *sidebar*. In fact, the sidebar is a *navigation bar*. First, it shows which section you are in. Second, clicking on a section title takes you to that section.

Creating a link is a two-step process.

1. Name the place you want to link to.
2. Create a button with the property that clicking on it jumps you to the designated place.

To illustrate this process, we modify the presentation babybeamer4. Open the file babybeamer4.tex and save it as babybeamer7.tex in the work folder (the edited version is in the samples folder along with the PDF file).

1. Name the frame you want to link to by adding a label to the `\begin{frame}` line. In `babybeamer7`, add a label to the frame `fourguests`:

   ```
   \begin{frame}[label=fourguests]
   ```

   Labels of frames are also useful for selective typesetting of your presentation, see Section 14.6.

2. Add the following line to `babybeamer7`:

   ```
   \hyperlink{fourguests<3>}%
             {\beamergotobutton{Jump to third guest}}
   ```

   This creates a link to the third overlay of the frame named `fourguests`, and creates a button, with the text `Jump to third guest`. Clicking on this button will jump to the third overlay of the frame `fourguests`.

3. To add variety to linking, include a new first frame:

   ```
   \begin{frame}
   \frametitle{First frame with a button}
   Button example

   Jumping to an overlay of a different frame
   \bigskip

   \hyperlink{fourguests<3>}%
   {\beamergotobutton{Jump to third guest}}
   \end{frame}
   ```

   which has a button for jumping to the third overlay of the `fourguests` frame.

4. We also add a new third frame.

   ```
   \begin{frame}
   \frametitle{Third frame with a button}
   Button example

   Jumping to another frame
   \bigskip

   \hyperlink{fourguests}%
   {\beamergotobutton{Jump to guest list}}
   \end{frame}
   ```

   with a button, with the text `Jump to guest list`. Clicking on this button will jump to the second frame, overlay not specified (defaults to 1).

5. Add a fourth frame,

   ```
   \begin{frame}
   \frametitle{Hidden link}
   \hyperlink{fourguests}{Jumping to the guest list}
   \end{frame}
   ```

   introducing another version of the \hyperlink command:

   ```
   \hyperlink{fourguests}{Jumping to the guest list}
   ```

   which typesets the second argument as regular text, making it an *invisible link*. However, you may notice that the cursor changes when it hovers over the link. For instance, you may want to link the use of a concept to its earlier definition, where you also need a button for the return jump.

   Here is babybeamer7:

```
% babybeamer7 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{First frame with a button}

Button example

Jumping to an overlay of a different frame
\bigskip

\hyperlink{fourguests<3>}%
{\beamergotobutton{Jump to third guest}}
\end{frame}

\begin{frame}[label=fourguests]
\frametitle{Overlaying lists}

We introduce our guests:
\begin{itemize}
\item<1-> R. Padmanabhan
\item<2-> Brian Davey
\item<3-> Harry Lakser
\item<4-> Dick Koch
\end{itemize}
```

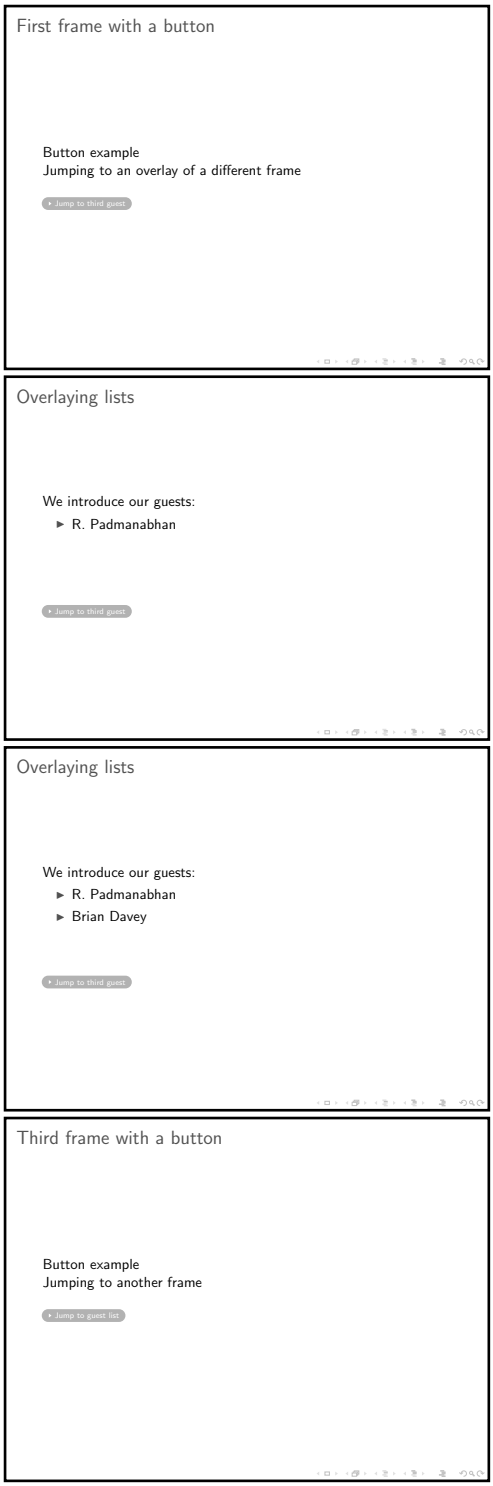

Figure 14.9: `babybeamer7` presentation.

```
\hyperlink{fourguests<3>}%
{\beamergotobutton{Jump to third guest}}
\end{frame}

\begin{frame}
\frametitle{Third frame with a button}
Button example

Jumping to another frame
\bigskip

\hyperlink{fourguests}%
{\beamergotobutton{Jump to guest list}}
\end{frame}

\begin{frame}
\frametitle{Hidden link}

\hyperlink{fourguests}{Jumping to the guest list}
\end{frame}
\end{document}
```

Figure 14.9 shows all these buttons. We do not show overlays 3 and 4 of frame 2 and frame 4, where the button is invisible.

14.2.8 Columns

Often, it is useful to put the display into columns. A simple illustration is given in babybeamer8:

```
% babybeamer8 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}
\frametitle{Columns, top alignment}

\begin{columns}[t]
\begin{column}{2in}
Is it true that there is no new result
on the Congruence Lattice Characterization Problem?
\end{column}
\begin{column}{2in}
```

```
F. Wehrung found a distributive algebraic lattice that
cannot be represented as the congruence lattice
of a lattice.
\end{column}
\end{columns}
\end{frame}
\end{document}
```

The environment is `columns`. It has an optional argument for alignment, `t` for top, `c` for center, and `b` for bottom.

The columns, usually two, are both in the `column` environment; the width of the column is in the argument; it can be given as a measurement—`2in` in the example—or relative to the width of the whole frame as `0.4\textwidth`.

Figure 14.10 shows the `babybeamer8` presentation.

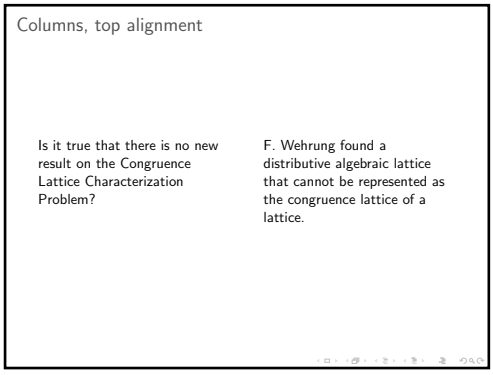
Columns, top alignment
Is it true that there is no new result on the Congruence Lattice Characterization Problem?
F. Wehrung found a distributive algebraic lattice that cannot be represented as the congruence lattice of a lattice.

Figure 14.10: `babybeamer8` presentation.

14.2.9 Coloring

LaTeX's job is to produce articles and books that contain text, math formulas, and graphics. Such publications—with the exception of textbooks—cannot afford color printing. Presentations are different. If you prepare a color presentation, it will project in color.

Nevertheless, the color commands are of limited use even for presentations. You probably use the color scheme of the chosen theme (see Section 14.5), and have limited opportunity to color things yourself. If you do, be very careful, too much color distracts from the presentation but judicious use of color—say, for highlighting a word or phrase—may be very effective.

`beamer` uses the sophisticated `xcolor` package of Uwe Kern. It colors by specifying the color model: `rgb` (red, green, blue), or `cmyk` (cyan, magenta, yellow, black), or `gray` (black and white)—there are many more models to choose from—and how much

of each color you want to mix. So `\color[rgb]{0,1,0}` paints everything—within its scope—green. You can color some text green with the command

```
\textcolor[rgb]{0,1,0}{This text is green.}
```

There are seventeen predefined colors: red, green, blue, cyan, magenta, yellow, orange, violet, purple, brown, pink, olive, black, darkgray, gray, lightgray, and white. With the proper options, there are hundreds more. So the previous command could also be given as

```
\textcolor{green}{This text is green.}
```

or as

```
{\color{green}This text is green.}
```

To pretty thing up, you can use `\colorbox{green}{Green box}`, which puts the argument in a green box and `\fcolorbox{red}{green}{Green box}`, which also adds a red frame.

`xcolor` is automatically loaded by `beamer`. To make sure that `xcolor` is loaded with the options desired, you have to include these options in the preamble in the

```
\documentclass{beamer}
```

line. For instance, to have the `dvipsnam` option for `xcolor`, invoke `beamer` with

```
\documentclass[xcolor=dvipsnam]{beamer}
```

You can also mix predefined colors:

```
{\color{green!40!yellow} This text is of what color?}
```

which sets the text 40% green and 60% yellow.

There are commands for defining colors and color sets, as well as for coloring the background, frames, and hyperlinks (see Uwe Kern, *Extending LaTeX's color facilities: the `xcolor` package* [36]).

Here is a simple illustration:

```
% babybeamer9 presentation
\documentclass{beamer}
\begin{document}

\setbeamercolor{normal text}{bg=yellow!15}
\begin{frame}
\frametitle{Colors}

\begin{columns}[t]
  \begin{column}{2in}
```

```
{\color{red}Is it true that there is no new result
on the Congruence Lattice Characterization Problem?}
  \end{column}
    \begin{column}{2in}
{\color{green}F. Wehrung found a distributive
algebraic lattice that cannot be represented
as the congruence lattice of a lattice.}
  \end{column}
\end{columns}
\end{frame}
\setbeamercolor{normal text}{bg=green!15}

\begin{frame}
\frametitle{Colors fading out}

We introduce our guests:
\begin{itemize}
\item {\color{red}R. Padmanabhan}
\item {\color{red!60!white}Brian Davey}
\item {\color{red!40!white}Harry Lakser}
\item {\color{red!20!white}Dick Koch}
\end{itemize}
\end{frame}
\end{document}
```

The command

```
\setbeamercolor{normal text}{bg=yellow!15}
```

sets the background color to light (15%) yellow. In the first column, the text is red, in the second, green. Set the foreground with `fg=`.

The background of the second frame is light green. The four participants are in lighter and lighter shades of red.

Figure 14.11 shows the frames of the `babybeamer9` presentation—unfortunately, not in color.

14.3 The structure of a presentation

The structure of your presentation is, by and large, determined by the sectioning commands: `\section` and `\subsection`. For a very long lecture there may also be `\part` commands. The argument of any of these commands may have a short version for the navigational side bar (see Section 14.1.4).

The sectioning commands used in a `beamer` presentation look the same as they do for articles and books, but they play a different role. They do not display a section

Colors
Is it true that there is no new result on the Congruence Lattice Characterization Problem?
F. Wehrung found a distributive algebraic lattice that cannot be represented as the congruence lattice of a lattice.
Colors fading out
We introduce our guests:
R. Padmanabhan
Brian Davey
Harry Lakser
Dick Koch

Figure 14.11: `babybeamer9` presentation.

title, but they add an entry to the table of contents. They also act as place markers in the sense that if you click on the title of a section in a navigation bar, then you will jump to the *frame following* the section command.

Rule ■ Sectioning commands

1. Sectioning commands can only be placed between frames.
2. There must be a frame following the last sectioning command.
3. For a long (sub)section title, use `\breakhere` to break a line.
4. The optional short versions are for the navigation bar.

These are illustrated with `beamerstructure1`, see Figure 14.12. The line

```
\tableofcontents[pausesections, pausesubsections]
```

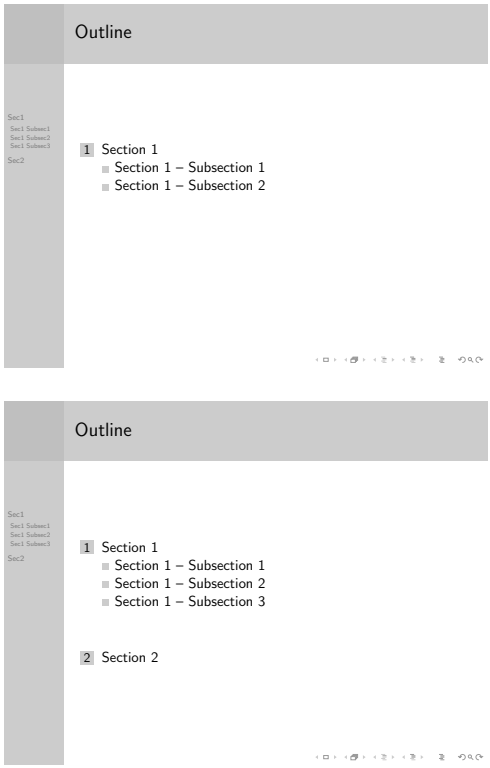

Figure 14.12: `beamerstructure1` presentation, pages 3 and 5.

causes the table of contents to appear a line at a time. This command may also be used without an option or only with one, `pausesections`.

The second page shown in Figure 14.12 is the table of contents. The page is about half filled with only five listed items, so no more than 10 sections and subsections would fit. There should be fewer.

```
% beamerstructure1 presentation
\documentclass{beamer}
\usetheme{Berkeley}
\begin{document}

\begin{frame}
\frametitle{Outline}

\tableofcontents[pausesections, pausesubsections]
\end{frame}
```

```
\section[Sec1]{Section 1}

\begin{frame}
\frametitle{Section 1}

Text of Section 1
\end{frame}

\subsection[Sec1 Subsec1]{Section 1 -- Subsection 1}

\begin{frame}
\frametitle{Section 1\\Subsection 1}

Text of Section 1, Subsection 1
\end{frame}

\subsection[Sec1 Subsec2]{Section 1 -- Subsection 2}
\begin{frame}
\frametitle{Section 1\\Subsection 2}

Text of Section 1, Subsection 2
\end{frame}

\subsection[Sec1 Subsec3]{Section 1 -- Subsection 3}
\begin{frame}
\frametitle{Section 1\\Subsection 3}

Text of Section 1, Subsection 3
\end{frame}

\section[Sec2]{Section 2}

\begin{frame}
\frametitle{Section 2}

Text of Section 2
\end{frame}

\end{document}
```

14.3.1 Longer presentations

Longer presentations may need parts and a more complicated table of contents. I will not discuss these topics, but the presentation `beamerstructure2` (in the `samples` folder) illustrates the use of parts and some other features. I added some comments to point these out. See Figure 14.13 for two sample pages of this presentation.

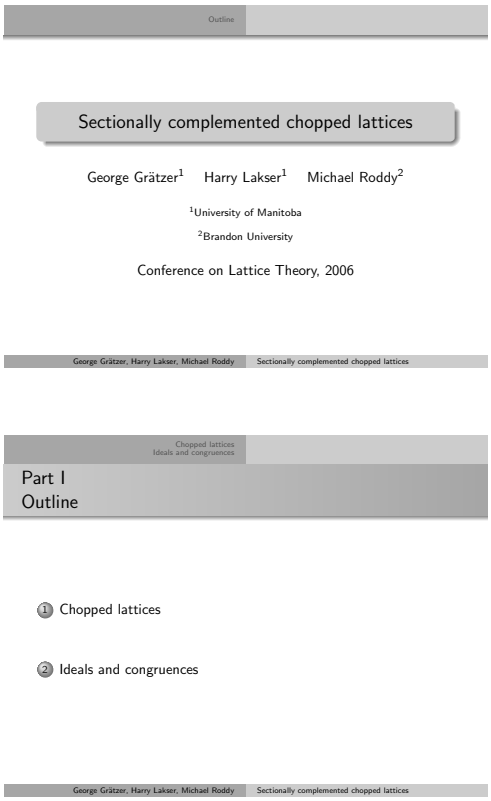
Outline
Sectionally complemented chopped lattices
George Grätzer[1] Harry Lakser[1] Michael Roddy[2]
[1]University of Manitoba
[2]Brandon University
Conference on Lattice Theory, 2006
George Grätzer, Harry Lakser, Michael Roddy Sectionally complemented chopped lattices
Chopped lattices
Ideals and congruences
Part I
Outline
1 Chopped lattices
2 Ideals and congruences
George Grätzer, Harry Lakser, Michael Roddy Sectionally complemented chopped lattices

Figure 14.13: `beamerstructure2` presentation, pages 1 and 10.

14.3.2 Navigation symbols

The more structure you have in a presentation, the more you may appreciate the navigation icons shown by default on each page in the last line on the right. The icons are:

- the slide
- the frame
- the section

- the presentation icons

each surrounded by a left and a right arrow

- the appendix
- the back and forward icons (circular arrows)
- the search icon (a magnifying glass)

If you decide not to have them, as in the presentation `beamerstructure2`, then give the following command in the preamble:

```
\setbeamertemplate{navigation symbols}{}
```

14.4 Notes

You can place notes in your presentation to remind yourself of what you want to say in addition to what is being projected. A note is placed in the presentation as the argument of the `\note` command, as in

```
\note{This is really difficult to compute.}
```

By default, notes are not shown in the presentation. If you invoke `beamer` with

```
\documentclass[notes=show]{beamer}
```

then the notes pages are included. The command

```
\documentclass[notes=show, trans]{beamer}
```

produces transparencies with notes, and

```
\documentclass[notes=only]{beamer}
```

produces only the note pages, one note page for every overlay of a frame with a note. To avoid this, print the output of

```
\documentclass[trans, notes=only]{beamer}
```

In addition to these examples, all the notes placed in a single frame are collected together on one note page. And a note between frames becomes a page on its own.

`beamer` does an excellent job of producing notes pages, for example, see Figure 14.14. In the upper-left corner, it displays precisely where we are in the structure of the presentation. The upper-right corner shows a small picture of the page to which the notes are attached.

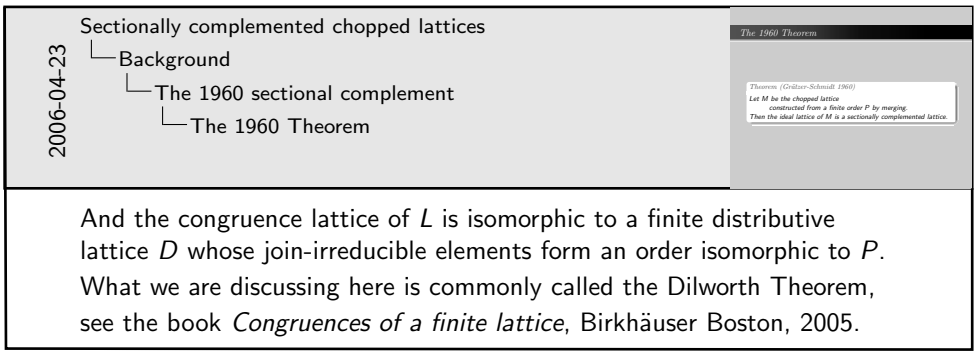
Sectionally complemented chopped lattices
Background
The 1960 sectional complement
The 1960 Theorem
2006-04-23
The 1960 Theorem
Theorem (Grätzer-Schmidt 1960)
Let M be the chopped lattice
constructed from a finite order P by merging.
Then the ideal lattice of M is a sectionally complemented lattice.
And the congruence lattice of L is isomorphic to a finite distributive lattice D whose join-irreducible elements form an order isomorphic to P.
What we are discussing here is commonly called the Dilworth Theorem,
see the book Congruences of a finite lattice, Birkhäuser Boston, 2005.

Figure 14.14: A note page.

14.5 Themes

If you look carefully at Figures 14.1, 14.2, and 14.13 (even better, if you look at the PDF files of these presentations), you see how every little detail of the presentation is provided by `beamer`. Figures 14.1 and 14.2 show a presentation style dominated by a dark blue headline and left sidebar, a complete navigation bar in the left sidebar, the name of the author(s) and the title repeated in every overlay, section numbers in colored squares, and so on.

The presentation in Figure 14.13 has no sidebars, section numbers are in colored circles, the navigation elements are in the headline.

The display of lists and theorems (and other similar elements of a presentation) also vary a great deal.

You can achieve such detailed control over your presentation by defining all these elements yourself. `beamer` places dozens of commands at your disposal to make this possible. Or you can use a *presentation theme* that will do the job for you.

The command to name a presentation theme is `\usetheme{}`. The presentation `beamerstructure2` uses the theme `Warsaw` (see Figure 14.13), so following the document class line type the command

```
\usetheme{Warsaw}
```

`quickbeamer1` uses the theme `Berkeley` (see Figures 14.1 and 14.2) and so does `beamerstructure1` (see Figure 14.12).

The presentation themes are in the `theme` subfolder of the `themes` folder of `beamer`. As of this writing, there are 26 of them, named after cities:

Presentation Themes

Without Navigation Bars `default`, `Bergen`, `Boadilla`, `Madrid`, `AnnArbor`, `CambridgeUS`, `Pittsburgh`, `Rochester`

With a Navigation Bar `Antibes`, `JuanLesPins`, `Montpellier`

With a table of contents Sidebar `Berkeley`, `PaloAlto`, `Goettingen`, `Marburg`, `Hannover`

With Mini Frame Navigation `Berlin`, `Ilmenau`, `Dresden`, `Darmstadt`, `Frankfurt`, `Singapore`, `Szeged`

With Section and Subsection Table `Copenhagen`, `Luebeck`, `Malmoe`, `Warsaw`

How do you choose a presentation theme? After the presentation is finished, try out the various themes. Ask yourself:

- Do sidebars take too much room away from my illustrations?
- Do stronger colors add to the presentation or do they distract?
- Do I want to use a navigation bar?

Answering these questions will narrow your choice.

The presentation theme defines all the colors, but you can alter them with the command `\usecolortheme{}`. You have a choice of `albatross`, `beetle`, `crane`, `fly`, and `seagull`.

For instance,

```
\usetheme{Warsaw}
\usecolortheme{seagull}
```

is a gray version of the `Warsaw` theme, appropriate for printing in black-and-white. In addition, you can further modify the "inner elements", such as blocks, with

```
\usecolortheme{lily}
```

or `orchid`, or `rose`. You can modify the "outer elements", such as headlines and sidebars, with

```
\usecolortheme{whale}
```

or `seahorse`, or `dolphin`. So you can have, for instance,

```
\usetheme{Warsaw}
\usecolortheme{lily}
\usecolortheme{whale}
```

This gives you 45 "out of the box" color schemes.

Similarly, font themes can also be specified, modifying the presentation theme, with the command `\usefonttheme{}`. You have the default and the following options:
`professionalfonts`
`structurebold`
`structureitalicserif`
`structuresmallcapserif`.

14.6 Planning your presentation

Step 1 As a rule, your presentation is based on one or more of your articles. Collect them in one folder. Resolve naming conventions as necessary. There should be only one `Fig1`!

Step 2 Rewrite the article(s) to sketch out your presentation. The pages correspond to frames. A page should not have too many words, say, no more than 40. Replace your numbered theorems with named theorems. Never reference another page. Have few sections and subsections. Add a table of contents, which is a readable overview of the new article.

Step 3 Base the new presentation on a presentation in the `samples` folder, a sample presentation in `beamer`'s `solution` folder, or on one of your own or of a colleague's older presentations. Turn the pages into frames.

Step 4 Design your frames and add frame titles. Completely disregard what we wrote in Section 4.3.2 (*the idea behind LaTeX is that you should concentrate on what you have to say and let LaTeX take care of the visual design*). The new principle is: *You are completely responsible for the visual appearance of every frame and overlay*.

This is, of course, in addition to brevity and readability. Do not let LaTeX break your lines. Do it with the `\\` command and keep words that belong together on the same line.

Step 5 Write notes to remind yourself what you want to say in your lecture that is not on the slides. Print the notes for your lecture.

Step 6 Build in flexibility. For instance, if you have four examples to illustrate a definition, put each one on a different frame or overlay, and add a link to each that skips the rest of the examples. Depending on your audience's understanding, show an example or two, and skip the rest. The same way, you may skip proof ideas and even topics.

Step 7 Prepare for the worst—the computer system may fail, but projectors seldom do—so print a set of transparencies for your lecture as a backup by invoking the option `trans` of the documentclass

```
\documentclass[trans]{beamer}
```

To print a *handout*, use the `handout` option

```
\documentclass[handout]{beamer}
```

Open the presentation in Acrobat Reader. In `Printer/Page Setup...` set landscape and 140% magnification. In the `Print` dialogue box in `Layout` choose two pages per sheet and print—assuming, of course, that you have a printer offering these options.

14.7 What did I leave out?

Since the `beamer` reference manual is over 200 pages long, it is clear that this chapter covers maybe 10% of it.

For most presentations, you won't even need most of what I have included. If you read Sections 14.1, 14.2.1 and maybe Section 14.3, you should have enough for most math presentations.

If you are in other fields, or if you are more ambitious, you may need more. For example, a computer scientist will want program listings in a `verbatim` environment. This is easy. Start your frame with

```
\begin{frame}{fragile}
```

and then you can use the `verbatim` environment.

If you want to include sounds or movies in your presentation, consult Till Tantau, *User's Guide to the Beamer Class* [59].

You can do very simple animation with what we have covered here. This is illustrated with the `babybeamer10` presentation (in the `samples` folder).

```
% babybeamer10 presentation
\documentclass{beamer}
\begin{document}

\begin{frame}

\includegraphics<1>{basem3-1}

\includegraphics<2>{basem3-2}

\includegraphics<3>{basem3-3}

\includegraphics<4>{basem3-4}
\end{frame}
\end{document}
```

The congruence generated by the dashed red line, see Figure 14.15, spreads in three steps, illustrating an interesting result. The animation is quite effective and instructive.

If you want to place such changing pictures lower in a frame, put them in the `overprint` environment.

I would recommend that you read Section 5 of Till Tantau, *User's Guide*, which has many good pointers about creating presentations.

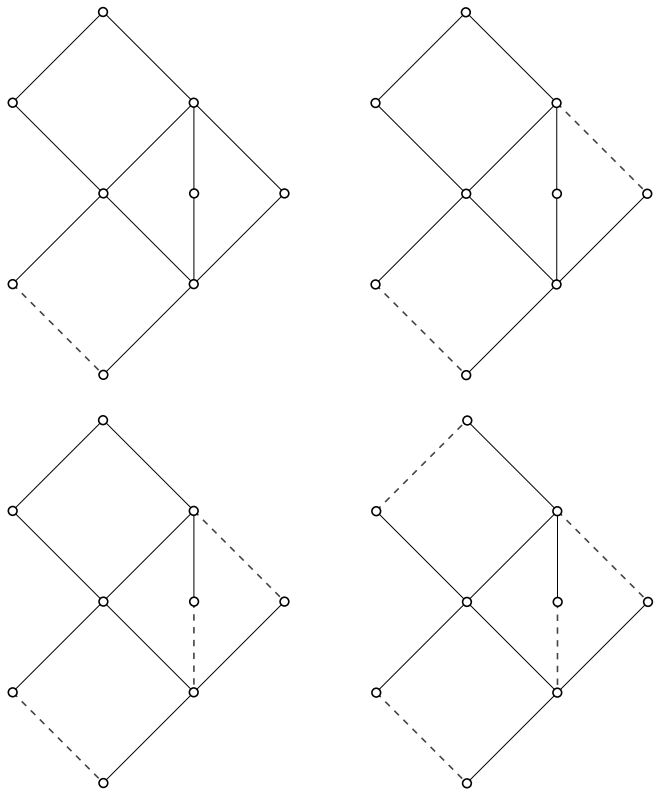

Figure 14.15: The four pictures of `babybeamer10`.

CHAPTER

15

Customizing LaTeX

In Section D.1.2, we discuss that Donald E. Knuth designed TeX as a platform on which *convenient work environments* could be built. One such work environment, LaTeX, predominates today, and it is indeed convenient.

Nevertheless, LaTeX is designed for all of us, so it is not surprising that we could improve on it for our personal use. There are many reasons to customize LaTeX:

Goal 1 to enhance the readability of the source file

Goal 2 to make notational and terminological changes easier

Goal 3 to redefine names used by LaTeX

Goal 4 to introduce consistent layouts

There are many techniques to accomplish these.

Technique 1 Define commands and environments in order to enhance LaTeX to meet your particular needs (see Sections 15.1, 15.1.6, and 15.2).

Technique 2 Utilize delimited commands to write LaTeX documents in a more readable fashion (see Section 15.1.8).

Technique 3 Collect your frequently used commands into a command file (see Section 15.3).

Technique 4 Manipulate *counters*, integers—for instance, equation numbers and section numbers—and *length commands*, distance measurements—the `\voffset` command is an example (see Section 15.5).

Technique 5 Create customized list environments with the `list` environment (see Section 15.6).

Of course, there are many more reasons to customize and many more techniques to employ. We cover them in detail in this chapter.

We dedicate the last section to the pitfalls of customization (see Section 15.7). While the benefits of customization are great, there are many practices to avoid.

15.1 User-defined commands

LaTeX provides hundreds of commands. Chances are good, however, that you still have specific needs that are not directly addressed by these commands. By judiciously adding *user-defined commands* (or *macros*) you can make your work more productive.

User-defined commands follow the same rules as regular LaTeX commands (see Section 5.3.1).

15.1.1 Examples and rules

Commands to enhance readability

Let us start with a few examples of user-defined commands as shorthand for longer command(s) or text in order to enhance readability of the source file (Goal 1).

1. If you use the `\leftarrow` command a lot, you could define

   ```
   \newcommand{\larr}{\leftarrow}
   ```

   Then you would only have to type `\larr` to obtain a left arrow.

2. Instead of

   ```
   \widetilde{a}
   ```

   you could simply type `\wtilda` after defining

   ```
   \newcommand{\wtilda}{\widetilde{a}}
   ```

   I show you how to define a generalized version of such a command in Section 15.1.2.

3. If you want to suppress the ligature in iff (see Section 5.4.6), you would normally have to type

   ```
   if\textcompwordmark f
   ```

   By defining a command `\Iff`,

   ```
   \newcommand{\Iff}{if\textcompwordmark f}
   ```

   you can type `\Iff` to get iff. We name this command `\Iff` because `\iff` is the symbol $\iff$ (see Section B.4).

4. If you use the construct $D^{[2]} \times D^{[3]}$ often, you could introduce the `\DxD` (D times D) command,

   ```
   \newcommand{\DxD}{D^{[2]}\times D^{[3]}}
   ```

   and then type `\DxD` instead of the longer, and hard to read, version throughout your document—serves also Goal 2.

5. If you want to get a backslash in typewriter style, you would normally have to type (see Section 5.4.4)

   ```
   \texttt{\symbol{92}}
   ```

   Instead, you can introduce the `\bsl` command,

   ```
   \newcommand{\bsl}{\texttt{\symbol{92}}}
   ```

   and `\bsl` typesets as \.

6. You can also use commands as a shorthand for text. For instance, if you use the phrase `subdirectly irreducible` many times in your document, you could define

   ```
   \newcommand{\subdirr}{subdirectly irreducible}
   ```

   `\subdirr` is now shorthand for `subdirectly irreducible`, which typesets as subdirectly irreducible.

Tip With modern editors, the need to have user-defined commands as shorthand is reduced. Most editors have "command completion" or "phrase completion". For instance, in TeXShop, type the first few letters of a word and hit the escape key. The remaining letters are entered to match the first entry in the completion dictionary. Hitting escape again cycles through all possible completions. To make this feature useful, you have to customize the completion dictionary.

Rule ■ User-defined commands

1. Issue the `\newcommand` command.
2. In braces, type the name of your new command, for example, `\subdirr`, including the backslash (\).
3. In a second pair of braces, define the command, in this example, `subdirectly irreducible`.
4. Use the command as `\subdirr\␣` or `\subdirr{}` before a space, before an alphabetical character as `\subdirr{}`, and `\subdirr` otherwise.

Examples for Rule 4. For subdirectly irreducible lattice type
`\subdirr{} lattice` or `\subdirr\ lattice`
and not `\subdirr lattice`. Indeed, typesetting `\subdirr lattice` results in subdirectly irreduciblelattice. By the first spacing rule, `\subdirr␣lattice` is not any better (see Section 5.2.1). If you want subdirectly irreducibles, you must use the `\subdirr{}` form. Indeed, `\subdirr{}s` typesets as subdirectly irreducibles.

Using new commands

It is good practice to place user-defined commands in the preamble of your document or in a command (style) file you load with a `\usepackage` command (see Section 15.3)—provided that you do not submit to a journal that does not allow this. Then you always know where to look for the command definitions. An exception is a user-defined command that you want to restrict to a part of the document. Delimit the segment with braces and define the user-defined command within those braces (see Section 5.3.2). Instead of a pair of braces, you can use `\begingroup` and `\endgroup`, which is easier to see. Section 15.2.5 recommends yet another approach.

Tip

- If errors occur, isolate the problem. Comment out the user-defined commands and reintroduce them one at a time.
- LaTeX only checks whether the braces match in the command definition. Other mistakes are found only when the command is used.

For instance, if you define a command with a spelling error

```
\newcommand{\bfA}{\textf{A}}
```

then at the first use of `\bfA` you get the error message

```
! Undefined control sequence.
\bfA ->\textf
              {A}
```

Note that LaTeX is not complaining about `\bfA` but about the misspelled `\textbf` command in the definition of `\bfA`.

Be careful not to define a user-defined command with a name that is already in use. If you do, you get an error message such as

```
! LaTeX Error: Command \larr already defined.
```

To correct the error, replace the command name with a new one. On the other hand, if you need to replace an existing command, you have to *redefine* it. See Section 15.1.5 for how to do so.

Tip Use spaces to make your source files more readable, but avoid them in definitions.

For example, you may type

```
$D^{ \langle 2 \rangle } + 2 = x^{ \mathbf{a} }$
```

This may help you see how the braces match, easily identify relations and operations, and so on. *Do not add these spaces in command definitions* because it may result in unwanted spaces in your typeset document. You may start a new line to increase the readability of a command definition, provided that you terminate the previous line with `%`. For instance, borrowing an example from page 372:

```
\newcommand{\Xquotphi}[2]{%
   \dfrac{\varphi \cdot X_{n, #1}}%
   {\varphi_{#2}\times \varepsilon_{#1}}}
```

Tip In the definition of a new command, command declarations need an extra pair of braces (see Section 5.3.3).

Say you want to define a command that typesets the warning: *Do not redefine this variable!* It is very easy to make the following mistake:

```
\newcommand{\Warn}{\em Do not redefine this variable!}
```

`\Warn` typesets the warning emphasized, but everything that follows the warning is also emphasized (more precisely, until the end of the `\Warn` command's scope). Indeed, `\Warn` is replaced by `\em Do not redefine this variable!` so the effect of `\em` goes beyond the sentence to the next closing brace.

The correct definition is

```
\newcommand{\Warn}{{\em Do not redefine this variable!}}
```

Even simpler, you could use a command with an argument

```
\newcommand{\Warn}{\emph{Do not redefine this variable!}}
```

The `xspace` *package*

Rule 4 (on page 366) is the source of many annoying problems in LaTeX. David Carlisle's `xspace` package (see Section 12.3.1) helps eliminate such problems. In the preamble, load the package with

```
\usepackage{xspace}
```

Whenever you define a command that may have such problems, add the `\xspace` command to the definition. For instance, define `\subdirr` as

```
\newcommand{\subdirr}{subdirectly irreducible\xspace}
```

Then all the following typesets `subdirectly irreducible lattice` correctly:

```
\subdirr␣lattice
\subdirr{}␣lattice
\subdirr␣lattice
```

Note that `\xspace` does not add space if followed by a punctuation mark, so to get

the lattice is subdirectly irreducible.

type

```
the lattice is \subdirr.
```

Tip Be careful not to use `\xspace` twice in a definition.

For instance, if you define

```
\newcommand{\tex}{\TeX\xspace}
\newcommand{\bibtex}{\textsc{Bib}\kern-.1em\tex\xspace}% Bad!!!
```

then

```
\bibtex, followed by a comma
```

typesets as

BIBTEX , followed by a comma

The correct definitions are

```
\newcommand{\tex}{\TeX\xspace}
\newcommand{\bibtex}{\textsc{Bib}\kern-.1em\TeX\xspace}% Correct!
```

Of course, if you want to get TEXbook, you cannot use `\xspace` variant definition: `\tex`.

Ensuring math

The `\ensuremath` command is useful for defining commands that work in both text and math mode. Suppose you want to define a command for $D^{\langle 2\rangle}$. If you define it as

```
\newcommand{\Dsq}{D^{\langle 2\rangle}}
```

then you can use the command in math mode, but not in text mode. If you define it as

```
\newcommand{\Dsq}{$D^{\langle 2\rangle}$}
```

then it works in text mode, but not in math mode. Instead, define this command as

```
\newcommand{\Dsq}{\ensuremath{D^{\langle 2\rangle}}}
```

Then `\Dsq` works correctly in both contexts.

This example also shows the editorial advantages of user-defined commands. Suppose the referee suggests that you change the notation to $D^{[2]}$. To carry out the change you only have to change one line:

```
\newcommand{\Dsq}{\ensuremath{D^{[2]}}}
```

It is hard to overemphasize the importance of this example. You may want to change notation because:

- you found a better notation;
- your coauthor insists;
- your article appears in a conference proceedings, and the editor wants to unify the notation;
- you are reusing the code from this article in another one or in a book, where the notation is different.

See also the discussion of the `\TextOrMath` command on page 311.

15.1.2 Arguments

Arguments of user-defined commands work the same way as for LaTeX commands (see page 69). Define

```
\newcommand{\fsqAB}{(f^2)^{[[\frac{A^2}{B-1}]]}}
```

Then `\fsqAB` typesets as $(f^2)^{[[\frac{A^2}{B-1}]]}$ in a math formula. If you want to use `\fsqAB` in math and also by itself in text, define it with `\ensuremath`, as

```
\newcommand{\fsqAB}{\ensuremath{(f^2)^
                 {[[\frac{A^2}{B-1}]]}}}
```

However, if you use this construct for many functions f, then you may need a generalized command, such as

```
\newcommand{\sqAB}[1]{\ensuremath{(#1^2)^
                   {[[\frac{A^2}{B-1}]]}}}
```

Now `\sqAB{g}` typesets $(g^2)^{[[\frac{A^2}{B-1}]]}$. The form of this `\newcommand` is the same as before, except that after the name of the command in braces, `{\sqAB}`, we specify the number of arguments in brackets (in this example, `[1]`). Then we can use `#1` in the definition of the command. When the command is invoked, the argument you provide replaces `#1` in the definition. Typing `$\sqAB{q}$` results in the formula $(q^2)^{[[\frac{A^2}{B-1}]]}$, while `$\sqAB{r}$` gives $(r^2)^{[[\frac{A^2}{B-1}]]}$.

Notice how these examples disrupt the normal spacing between lines—a practice to avoid!

A user-defined command may have up to nine arguments, numbered `1`–`9`.

The simplest examples just allow you to invoke an existing command under a new name. For instance, the `\eqref` command introduced in Section 7.3 to reference equations (the equation number upright, enclosed in parentheses), would also be useful to reference items for the user-defined list environment `enumeratei` introduced in Section 15.2.1—see Example 3. Indeed, for the `enumeratei` environment, we want references to items to be typeset upright, enclosed in parentheses. So if the first item has label `First`, we could reference it with `\eqref{First}`, which typesets as (i). But `\eqref{First}` seems awkward and inappropriate; we are referencing an item not an equation.

So define

```
\newcommand{\itemref}[1]{\eqref{#1}}
```

and now we can reference the first item with `\itemref{First}`, which typesets as (i).

Following are some simple examples of user-defined commands with arguments.

1. In the preamble of the source file for this book, I defined

   ```
   \newcommand{\env}[1]{\textnormal{\texttt{#1}}}
   ```

In this example, the `\env` command is used to typeset environment names. So the environment name `center` is typed as

```
\env{center}
```

Again the editorial advantage is obvious. If the editor wants the environment names set in sans serif, only one line in the book has to be changed to alter every occurrence of a typeset environment name:

```
\newcommand{\env}[1]{\textsf{#1}}
```

2. An argument (e.g., `#1`) may occur more than once in a definition. A natural example is provided by the `\index` command (see Section 17.1). Typically, if you wanted to include a phrase, say subdirectly irreducible lattice, in your index, you would have to type

```
this proves that $L$ is a subdirectly irreducible
lattice\index{subdirectly irreducible lattice}
```

You could instead define an "index it" command such as

```
\newcommand{\indexit}[1]{#1\index{#1}}
```

The argument of this command is a phrase to be both typeset and included in the index. Using this command, you can type

```
this proves that $L$ is a
\indexit{subdirectly irreducible lattice}
```

If you want all such index entries to be typeset in italics, then `\indexit` should be defined as

```
\newcommand{\indexit}[1]{#1\index{#1@\textit{#1}}}
```

in which `#1` occurs three times. (See Chapter 17 for more information about index commands.)

3. Let us define a command with three arguments for congruences:

```
\newcommand{\congr}[3]{#1\equiv#2\pod{#3}}
```

Now type `$\congr{a}{b}{\theta}$` to typeset $a \equiv b \ (\theta)$. In Section 15.1.8, I present another command for typesetting congruences.

4. In the `sampart.tex` article (see Section 11.3), there are a lot of vectors with only one nonzero entry:

$$\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle$$

the i above the d indicates that it is the ith component of the vector. A command

`\vectsup`, a vector with a superscript, producing this symbol can be defined as

```
\newcommand{\vectsup}[2]{\langle\dots,0,\dots,
\overset{#1}{#2},\dots,0,\dots\rangle}
```

`\vectsup{i}{d}` in a math formula now produces $\langle \dots, 0, \dots, \overset{i}{d}, \dots, 0, \dots \rangle$.

5. Formula 20 of the *Formula Gallery* (Section 7.9),

$$\mathbf{A} = \begin{pmatrix} \dfrac{\varphi \cdot X_{n,1}}{\varphi_1 \times \varepsilon_1} & (x+\varepsilon_2)^2 & \cdots & (x+\varepsilon_{n-1})^{n-1} & (x+\varepsilon_n)^n \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_2 \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_2 \times \varepsilon_2} & \cdots & (x+\varepsilon_{n-1})^{n-1} & (x+\varepsilon_n)^n \\ \hdotsfor{5} \\ \dfrac{\varphi \cdot X_{n,1}}{\varphi_n \times \varepsilon_1} & \dfrac{\varphi \cdot X_{n,2}}{\varphi_n \times \varepsilon_2} & \cdots & \dfrac{\varphi \cdot X_{n,n-1}}{\varphi_n \times \varepsilon_{n-1}} & \dfrac{\varphi \cdot X_{n,n}}{\varphi_n \times \varepsilon_n} \end{pmatrix} + \mathbf{I}_n$$

is a good candidate for user-defined commands. By defining

```
\newcommand{\Xquotphi}[2]{%
   \dfrac{\varphi \cdot X_{n, #1}}%
   {\varphi_{#2}\times \varepsilon_{#1}}}
\newcommand{\exn}[1]{(x+\varepsilon_{#1})^{#1}}
```

the two new commands,

```
\[
   \Xquotphi{2}{3} \qquad \exn{n}
\]
```

are typeset as

$$\frac{\varphi \cdot X_{n,2}}{\varphi_3 \times \varepsilon_2} \qquad (x+\varepsilon_n)^n$$

With these user-defined commands, you can rewrite Formula 20 as follows:

```
\[
   \mathbf{A} =
   \begin{pmatrix}
      \Xquotphi{1}{1} & \exn{2} & \cdots & \exn{n - 1}
         & \exn{n}\\[10pt]
      \Xquotphi{1}{2} & \Xquotphi{2}{2} & \cdots
         & \exn{n - 1}  &\exn{n}\\
      \hdotsfor{5}\\
      \Xquotphi{1}{n} & \Xquotphi{2}{n} & \cdots &
       \Xquotphi{n - 1}{n} & \Xquotphi{n}{n}
   \end{pmatrix}
    + \mathbf{I}_{n}
```

```
\]
```

Observe how much shorter this form is than the version shown in the *Formula Gallery* and how much easier it is to read. It is also easier to reuse in a subsequent article.

15.1.3 Short arguments

There are three ways of defining new commands:

```
\newcommand   \renewcommand   \providecommand
```

We take up the last two in Section 15.1.5. They define commands that can take any number of paragraphs as arguments. The `*`-ed versions of these commands define *short* commands (see Section 5.3.3) that take a block of text that contains no paragraph break as an argument. For instance,

```
\newcommand{\bigbold}[1]{{\large\bfseries#1}}
```

makes its argument large and bold. So

```
\bigbold{First paragraph.

Second paragraph.

}
```

prints

First paragraph.
Second paragraph.

as expected. On the other hand, if you define

```
\newcommand*{\bigbold}[1]{{\large\bfseries#1}}
```

and then attempt to typeset the previous example, you get the error message

```
! Paragraph ended before \bigbold was complete.
<to be read again>
                   \par
```

Short commands are often preferable because of their improved error checking.

15.1.4 Optional arguments

You can define a command whose first argument is *optional,* and provide a *default value* for this optional argument. To illustrate, let us define the command

```
\newcommand{\SimpleSum}{a_{1}+a_{2}+\dots+a_{n}}
```

`$\SimpleSum$` now produces $a_1 + a_2 + \cdots + a_n$. Now we change this command so that we can sum from 1 to m if necessary, with n as the default:

```
\newcommand{\BetterSum}[1][n]{a_{1}+a_{2}+\dots+a_{#1}}
```

`$\BetterSum$` still produces $a_1 + a_2 + \cdots + a_n$, but `$\BetterSum[m]$` typesets as $a_1 + a_2 + \cdots + a_m$.

A `\newcommand` may have up to nine arguments, but *only the first* may be optional. The following command has two arguments, one optional:

```
\newcommand{\BestSum}[2][n]{#2_{1}+#2_{2}+\dots+#2_{#1}}
```

Now

`$\BestSum{a}$`	typesets as	$a_1 + a_2 + \cdots + a_n$
`$\BestSum{b}$`	typesets as	$b_1 + b_2 + \cdots + b_n$
`$\BestSum[m]{c}$`	typesets as	$c_1 + c_2 + \cdots + c_m$

15.1.5 Redefining commands

LaTeX makes sure that you do not inadvertently define a new command with the same name as an existing command (see, for example, page 367). Assuming that you have already defined the `\larr` command as in Section 15.1.1 (to typeset $\leftarrow$), to *redefine* `\larr`, use `\renewcommand`:

```
\renewcommand{\larr}{\Longleftarrow}
```

and now `\larr` typesets as $\Longleftarrow$.

Tip Use the `\renewcommand` command sparingly and make sure that you understand the consequences of redefining an existing command. Redefining LaTeX commands may cause LaTeX to behave in unexpected ways, or even crash.

Blind redefinition is the route to madness.

See also the discussion in Section 15.7.

You can also use `\renewcommand` to redefine commands defined by LaTeX or any package. For instance, the end of proof symbol, `\qedsymbol`, used by the `proof` environment, can be changed to the solid black square some people prefer (defined in the `amssymb` package) with the command

```
\renewcommand{\qedsymbol}{$\blacksquare$}
```

Even better, define

```
\renewcommand{\qedsymbol}{\ensuremath{\blacksquare}}
```

so that you can use `\qedsymbol` in both text and math mode. Section 15.1.6 has more on redefining names.

`\renewcommand` has a companion, `\providecommand`. If the command it defines has already been defined, the original command is left unchanged. Otherwise, the `\providecommand` command acts exactly like `\newcommand`. For instance, the `\bysame` command (see Section 10.5.1, page 266) is defined in some document classes as

```
\newcommand{\bysame}{\makebox[3em]{\hrulefill}\thinspace}
```

If you want to use the `\bysame` command in your bibliography and include this definition in your document, LaTeX generates an error message when you typeset your document using a document class that already defines `\bysame` (all AMS document classes do). However, if you define `\bysame` in your document using `\providecommand`:

```
\providecommand{\bysame}%
{\makebox[3em]{\hrulefill}\thinspace}
```

the `\bysame` command typesets correctly whether or not the document class defines it.

15.1.6 Redefining names

A number of names, such as Table, List of Tables, Abstract, and so on, are typeset in your document by LaTeX. You can easily change these names.

For instance, if you are preparing your manuscript for the proceedings of a meeting, and Abstract has to be changed to Summary, you can do so with

```
\renewcommand{\abstractname}{Summary}
```

Table 15.1 lists the commands that define such names in various document classes, along with their default definitions and the major document classes using the commands. It is easy to check whether your document class defines such a command, simply open the appropriate `cls` file and search for the command.

If your document has photographs rather than figures, you could redefine

```
\renewcommand{\figurename}{Photograph}
\renewcommand{\listfigurename}{List of Photographs}
```

Command	Default Value	Defined by Document Class
\abstractname	Abstract	aa, ab, ap, a, p, r
\appendixname	Appendix	aa, ab, ap, a, b, r
\bibname	Bibliography	ab, b, r
\ccname	Cc	l
\chaptername	Chapter	ab, b, r
\contentsname	Contents	aa, ab, ap, a, b, r
\datename	Date	aa, ab, ap
\enclname	Enclosure	l
\figurename	Figure	aa, ab, ap, a, b, r
\headtoname	To	l
\indexname	Index	aa, ab, ap, a, b, r
\keywordsname	Key words and phrases	aa, ab, ap
\listfigurename	List of Figures	aa, ab, ap, a, b, r
\listtablename	List of Tables	aa, ab, ap, a, b, r
\pagename	Page	l, p
\partname	Part	aa, ab, ap, a, b, r
\proofname	Proof	aa, ab, ap
\refname	References	aa, ap, a
\see	see	aa, ab, ap
\seealso	see also	aa, ab, ap
\subjclassname	1991 Mathematics Subject Classification	aa, ab, ap
\subjclassname[2000]	2000 Mathematics Subject Classification	aa, ab, ap
\tablename	Table	aa, ab, ap, a, b, r

Document class codes: aa amsart, ab amsbook, ap amsproc, a article, b book, l letter, p proc, and r report

Table 15.1: Redefinable name commands in LaTeX.

15.1.7 Showing the definitions of commands

If you are defining a new command with \newcommand and an error message informs you that the command name is already in use, then it may be useful to find out the existing definition of the command. For instance, the \vects command is defined in sampartu.tex (in the samples folder and in Section 15.4). If you called this new command \vec, you would get the error message

```
! LaTeX Error: Command \vec already defined.
```

You can find out the definition of the `\vec` command by getting into interactive mode (see Section D.4) and typing

```
*\show \vec
```

LaTeX responds with

```
> \vec=macro:
->\mathaccent "017E .
<*> \show \vec
```

informing you that `\vec` is a command, and, specifically, a math accent (see Sections 7.7 and B.8). Now try `\hangafter` (see Section 5.7.2):

```
*\show \hangafter

> \hangafter=\hangafter.
<*> \show \hangafter
```

The response indicates that `\hangafter` is a *primitive,* defined by TeX itself. Redefining a primitive is not a good idea.

Try one more command, `\medskip` (see Section 5.8.2), to find out how large it is:

```
*\show \medskip
> \medskip=macro:
->\vspace \medskipamount .
```

The third line indicates that the length is stored in `\medskipamount`. If we use `\show` to ask what `\medskipamount` is defined to be:

```
*\show \medskipamount
> \medskipamount=\skip14.
```

we do not get a very useful answer. `\medskipamount` is unlike most of the commands you have seen so far. It is a *length command* (see Section 15.5.2), containing the value of `\medskip`. You can ask for the value of a length command (or parameter) with the `\showthe` command:

```
*\showthe \medskipamount

> 6.0pt plus 2.0pt minus 2.0pt.
```

So `\medskip` is a vertical space of 6 points that can stretch or shrink by up to 2 points.

LaTeX has many registers that contain numbers:

- counters containing integers, such as `3`
- dimensions such as `10.2pt`. For example, `\textwidth` (see Section 10.6)

- lengths, written in the form `6.0pt plus 2.0pt minus 2.0pt`, also called a *glue* or a *rubber length* (see Sections 15.5.2 and D.3.2)

Use the `\showthe` command to display the value for any of these registers.

You can also type the `\show` and `\showthe` commands directly into your document rather than go into interactive mode. LaTeX's response appears in the `log` window, and is saved into the `log` file.

15.1.8 Delimited commands

You can define new commands in TeX using characters and symbols to delimit arguments. Such *delimited commands* provide a way to write more readable source documents.

First we have to learn how to define a command using TeX's `\def` command. Type `\def`, followed by the new command name (not in braces), then the definition in braces. For example, the first command defined in Section 15.1.1,

```
\newcommand{\larr}{\leftarrow}
```

could be typed

```
\def\larr{\leftarrow}
```

TeX's `\def` command does not check whether a new command name is already in use, so `\def` behaves differently from the LaTeX's `\newcommand`, `\renewcommand`, and `\providecommand` (see Section 15.1.5). If the `\larr` command was defined previously, the original definition is overwritten.

Tip It is your responsibility to ensure that your command name is unique when you define a command using `\def`. LaTeX provides no protection. Use the techniques introduced in Section 15.1.7 to check a name before you define a command with `\def`.

Now we can start discussing delimited commands with a simple example, defining a command for vectors:

```
\def\vect<#1>{\langle#1\rangle}
```

Note that `\vect` is a command with one argument, `#1`. When invoked, it typesets $\langle$, the argument, and then $\rangle$.

In the definition of `\vect`, the argument `#1` is delimited by `<` and `>`. When the command is invoked, the argument must be delimited the same way. So to typeset the vector $\langle a, b\rangle$, we invoke `\vect` with

```
\vect<a,b>
```

This looks somewhat like a vector, and the name `\vect` serves as a reminder.

You have to be careful with delimited commands because the math spacing rules (see Section 7.2) do not hold in either the definition or the invocation. So if there is a space before `#1`, in the definition of `\vect`,

```
\def\vect<␣#1>{\langle#1\rangle}
```

then `$\vect<a,b>$` results in the error message

```
! Use of \vect doesn't match its definition.
l.12 $\vect<a
             ,b>$
```

which is clear enough. If the space is on the other side of the `#1`, as in

```
\def\vect<#1 >{\langle#1\rangle}
```

the error message is slightly more confusing:

```
Runaway argument?
a,b>$
! Paragraph ended before \vect was complete.
<to be read again>
                   \par
```

The moral is that if you use delimited commands, you must be very careful that each invocation exactly matches the definition.

In Example 3 of Section 15.1.2, we introduced a command with three arguments for typing congruences:

```
\newcommand{\congr}[3]{#1\equiv#2\pod{#3}}
```

`$\congr{a}{b}{\theta}$` produces $a \equiv b \ (\theta)$. This command is easy to remember, but it does not make the source file more readable. For that, we use a delimited command.

Let us redo the congruence example with a delimited command

```
\def\congr#1=#2(#3){#1\equiv#2\pod{#3}}
```

so that `$\congr a=b(\theta)$` produces $a \equiv b \ (\theta)$. In the source document, the formula `\congr a=b(\theta)` looks a bit like the typeset congruence and it is easier to read. I included this definition in the `newlattice.sty` command file (see Section 15.3).

There is only one catch. Suppose you want to typeset the formula

$$x = a \equiv b \quad (\theta)$$

If you type `$\congr x=a=b(\theta)$`, LaTeX typesets it as $x \equiv a = b \ (\theta)$. Indeed, `x` is delimited on the right by the first `=`, so LaTeX believes that the first argument is `x`.

The second argument is delimited by the first = and the left parenthesis, so it is a=b. In such cases, you can help LaTeX find the correct first argument by enclosing it in braces:

```
$\congr{x=a}=b(\theta)$
```

Here is our final example. In Section 5.3.1 we discuss the problem of typing a command such as \TeX (the example there was \today) in the form \TeX\␣ so that it is typeset as a separate word. The problem is that if you type \TeX without the trailing \␣, TeX is merged with the next word, and there is no error message to warn you. One solution is to use a delimited command:

```
\def\tex/{\TeX}
```

Now to get TeX, type \tex/. If a space is needed after it, type \tex/␣. If you forget the closing /, you get an error message.

A better solution to this problem is the use of the xspace package—provided you do not want to typeset something like TeXbook (see Section 15.1.1). However, many documents use the delimited construct (including the AMS documentation), so you should be familiar with it.

15.2 User-defined environments

Most user-defined commands are new commands. *User-defined environments,* as a rule, are built on existing environments. We start with such user-defined environments (Section 15.2.1) and then proceed to investigate

- arguments (Section 15.2.2)
- optional arguments (Section 15.2.3)
- short arguments (Section 15.2.4)

Finally, we discuss how to define brand-new environments (Section 15.2.5).

15.2.1 Modifying existing environments

If you do not like the name of the proof environment and would prefer to use the name demo, define

```
\newenvironment{demo}
   {\begin{proof}}
   {\end{proof}}
```

Note that this does not change how the environment is typeset, only the way it is invoked.

To modify an existing environment, `oldenv`, type

```
\newenvironment{name}
   {begin_text}
   {end_text}
```

where *begin_text* contains the command `\begin{oldenv}` and *end_text* contains the command `\end{oldenv}`.

Tip Do not give a new environment the name of an existing command or environment.

For instance, if you define

```
\newenvironment{parbox}
   {...}
   {...}
```

you get the error message

```
! LaTeX Error: Command \parbox already defined.
```

If there is an error in such a user-defined environment, the message generated refers to the environment that was modified, not to your environment. For instance, if you misspell `proof` as `prof` when you define

```
\newenvironment{demo}
   {\begin{prof}}
   {\end{proof}}
```

then *at the first use* of the `demo` environment you get the message

```
! LaTeX Error: Environment prof undefined.


l.13 \begin{demo}
```

If you define

```
\newenvironment{demo}
   {\begin{proof}\em}
   {\end{prof}}
```

at the first use of `demo` you get the message

```
! LaTeX Error: \begin{proof} on input line 5
        ended by \end{prof}.


    l.14 \end{demo}
```

Here are four more examples of modified environments.

1. The command

```
\newenvironment{demo}
   {\begin{proof}\em}
   {\end{proof}}
```

   defines a `demo` environment that typesets an emphasized proof. Note that the scope of `\em` is the `demo` environment.

2. The following example defines a very useful environment. It takes an argument to be typeset as the name of a theorem:

```
\newtheorem*{namedtheorem}{\theoremname}
\newcommand{\theoremname}{testing}
\newenvironment{named}[1]{
   \renewcommand{\theoremname}{#1}
   \begin{namedtheorem}}
   {\end{namedtheorem}}
```

   For example,

```
\begin{named}{Name of the theorem}
Body of theorem.
\end{named}
```

   produces

   Name of the theorem. *Body of theorem.*

   in the style appropriate for the `\newtheorem*` declaration. This type of environment is often used to produce an unnumbered **Main Theorem** (see Section 15.4) or when typesetting an article or book in which the theorem numbering is already fixed, for instance, when publishing a book in LaTeX that was originally typeset by another typesetting system.

3. In Sections 6.2.4 and 12.3.1, we came across the `enumerate` package, which allows you to customize the `enumerate` environment. If the `enumerate` package is loaded, you can invoke the `enumerate` environment with an optional argument specifying how the counter should be typeset, for instance, with the option `[\upshape (i)]`,

```
\begin{enumerate}[\upshape (i)]
   \item First item\label{First}
\end{enumerate}
```

   items are numbered (i), (ii), and so on.

So now we define

```
\newenvironment{enumeratei}{\begin{enumerate}%
                [\upshape (i)]}%
                            {\end{enumerate}}
```

and we can invoke the new environment with (see Sections 15.3 and 15.4)

```
\begin{enumeratei}
   \item \label{ }
\end{enumeratei}
```

Reference items in the `enumeratei` environment with the `\itemref` command introduced in Section 15.1.2.

4. If you want to define an environment for displaying text that is numbered as an equation, you might try

```
\newenvironment{texteqn}
   {\begin{equation} \begin{minipage}{0.9\linewidth}}
   {\end{minipage} \end{equation}}
```

But there is a problem. If you use this environment in the middle of a paragraph, an interword space appears at the beginning of the first line after the environment. To remove this unwanted space, use the `\ignorespacesafterend` command, as in

```
\newenvironment{texteqn}
  {\begin{equation} \begin{minipage}{0.9\linewidth}}
  {\end{minipage} \end{equation} \ignorespacesafterend}
```

Examples 2 and 3 are included in the `newlattice.sty` command file (see Section 15.3). See the sample article, `sampartu.tex` in Section 15.4, for some instances of their use.

See Section 15.6.3 for custom lists as user-defined environments.

Redefine an existing environment with the `\renewenvironment` command. It is similar to the `\renewcommand` command (see Section 15.1.5).

There are some environments you cannot redefine; for instance, `verbatim` and all the AMS multiline math environments.

15.2.2 Arguments

An environment defined by the `\newenvironment` command can take arguments (see Example 2 in Section 15.2.1), but they can only be used in the *`begin_text`* argument of the `\newenvironment` command. Here is a simple example. Define a `theorem` proclamation in the preamble (see Section 6.4), and then define a theorem that can be referenced:

```
\newenvironment{theoremRef}[1]
   {\begin{theorem}\label{T:#1}}
   {\end{theorem}}
```

This is invoked with

```
\begin{theoremRef}{label}
```

The `theoremRef` environment is a modified environment. It is a `theorem` that can be referenced (with the `\ref` and `\pageref` commands, of course) and it invokes the `theorem` environment when it defines `T:`*label* to be the label for cross-referencing.

15.2.3 Optional arguments with default values

The first argument of an environment created with the `\newenvironment` command may be an *optional argument with a default value.* For example,

```
\newenvironment{narrow}[1][3in]
   {\noindent\begin{minipage}{#1}}
   {\end{minipage}}
```

creates a `narrow` environment. By default, it sets the body of the environment in a 3-inch wide box, with no indentation. So

```
\begin{narrow} This text was typeset in a \texttt{narrow}
  environment, in a 3-inch wide box, with no indentation.
\end{narrow}
```

typesets as

This text was typeset in a `narrow` environment, in a 3-inch wide box, with no indentation.

You can also give an optional argument to specify the width. For example,

```
\begin{narrow}[3.5in]
  This text was typeset in a \texttt{narrow} environment,
  in a 3-inch wide box, with no indentation.
\end{narrow}
```

which produces the following false statement:

This text was typeset in a `narrow` environment, in a 3-inch wide box, with no indentation.

15.2.4 Short contents

We have discussed two commands that define new environments,

`\newenvironment` and `\renewenvironment`

These commands allow you to define environments whose contents (*`begin_text`* and *`end_text`*; see page 381) can include any number of paragraphs. The `*`-ed versions of these commands define *short* environments whose contents cannot contain a paragraph break (a blank line or a `\par` command).

15.2.5 Brand-new environments

Some user-defined environments are not modifications of existing environments. Here are two examples:

1. A command remains effective only within its scope (see Section 5.3.2). Now suppose that you want to make a change, say redefining a counter, for only a few paragraphs. You could simply place braces around these paragraphs, but they are hard to see. So define

   ```
   \newenvironment{exception}
      {\relax}
      {\relax}
   ```

   and then

   ```
   \begin{exception}
       new commands
       body
   \end{exception}
   ```

   The environment stands out better than a pair of braces, reminding you later about the special circumstances. The `\relax` command does nothing, but it is customary to include a `\relax` command in such a definition to make it more readable.

2. In this example, we define a new environment that centers its body vertically on a new page:

   ```
   \newenvironment{vcenterpage}
                  {\newpage\vspace*{\fill}}
                  {\vspace*{\fill}\par\pagebreak}
   ```

For `\vspace`, see Section 5.8.2 and for `\fill`, see the last subsection in Section 15.5.

15.3 A custom command file

User-defined commands, of course, are a matter of individual need and taste. I have collected some commands for writing papers in lattice theory in the `newlattice.sty` file, which you can find in the `samples` folder (see page 4). I hope that this model helps you to develop a command file of your own. Please remember that everything we discuss in this section is a reflection of *my* work habits. Many experts disagree with one or another aspect of the way I define the commands, so take whatever suits your needs. And keep in mind the dangers of customization discussed in Section 15.7.

Tip Some journals do not permit the submission of a separate custom command file. For such journals, just copy the needed user-defined commands into the preamble of the article.

This file is named `newlattice.sty`. It can be loaded with `\usepackage`. This has a number of advantages.

Your command names should be mnemonic. If you cannot easily remember a command's name, rename it. The implication here is that your command file should not be very large unless you have an unusual ability to recall abbreviations.

Here are the first few lines of the `newlattice.sty` command file:

```
% newlattice.sty
% New command file for lattice papers
\NeedsTeXFormat{LaTeX2e}[2005/12/01]
\ProvidesPackage{newlattice}[2006/03/15 v1.2
        New commands for lattices]
\RequirePackage{amsmath}
\RequirePackage{amssymb}
\RequirePackage{latexsym}
\RequirePackage[mathscr]{eucal}
\RequirePackage{verbatim}
\RequirePackage{enumerate}
\RequirePackage{xspace}
```

The line

```
\NeedsTeXFormat{LaTeX2e}[2005/12/01]
```

gives an error message if a document loading the `newlattice` package is typeset with LaTeX 2.09 or with an older version of the standard LaTeX. The next line provides information that is written in your `log` file.

The next seven lines declare what packages are required. If some of these packages have not yet been loaded, then the missing packages are loaded. A package loaded

with `\RequirePackage` is not read in again.

Being able to specify the packages we need is one of the great advantages of command files. When I write a document, the packages are there if I need them.

You may want some justification for the inclusion of two of these packages in this list. The `verbatim` package is on the list so that I can use the `comment` environment to comment out large blocks of text (see Section 5.5.1), which is useful for finding errors and typesetting only parts of a longer document—but do not forget to remove your comments before submission. The `enumerate` package is on the list because the `enumeratei` and `enumeratea` environments, defined in `newlattice.sty`, require it.

If you start your article with

```
\documentclass{amsart}
\usepackage{newlattice}
```

then the `\listfiles` command (see Section D.3.4) produces the following list when your document is typeset:

```
*File List*
  amsart.cls    2004/08/06 v2.20
 amsmath.sty    2000/07/18 v2.13 AMS math features
 amstext.sty    2000/06/29 v2.01
  amsgen.sty    1999/11/30 v2.0
  amsbsy.sty    1999/11/29 v1.2d
  amsopn.sty    1999/12/14 v2.01 operator names
    umsa.fd    2002/01/19 v2.2g AMS font definitions
amsfonts.sty    2001/10/25 v2.2f
newlattice.sty    2006/03/15 New commands for lattices v1.2
 amssymb.sty    2002/01/22 v2.2d
enumerate.sty    1999/03/05 v3.00 enumerate
                                  extensions (DPC)
graphicx.sty    1999/02/16 v1.0f Enhanced LaTeX
                                 Graphics (DPC,SPQR)
  keyval.sty    1999/03/16 v1.13 key=value
                                 parser (DPC)
    trig.sty    1999/03/16 v1.09 sin cos tan (DPC)
graphics.cfg    2005/02/03 v1.3 graphics configuration
                    of teTeX/TeXLive
  pdftex.def    2002/06/19 v0.03k graphics/color
                                      for pdftex
    umsa.fd    2002/01/19 v2.2g AMS font definitions
    umsb.fd    2002/01/19 v2.2g AMS font definitions
    ueuf.fd    2002/01/19 v2.2g AMS font definitions
 ************
```

Now we continue with `newlattice.sty`. After the introductory section dealing with LaTeX and the packages, we define some commands for writing about lattices and sets:

```
% Lattice operations
\newcommand{\jj}{\vee}% join
\newcommand{\mm}{\wedge}% meet
\newcommand{\JJ}{\bigvee}% big join
\newcommand{\MM}{\bigwedge}% big meet
\newcommand{\JJm}[2]{\JJ(\,#1\mid#2\,)}% big join with a middle
\newcommand{\MMm}[2]{\MM(\,#1\mid#2\,)}% big meet with a middle
% Set operations
\newcommand{\uu}{\cup}% union
\newcommand{\ii}{\cap}% intersection
\newcommand{\UU}{\bigcup}% big union
\newcommand{\II}{\bigcap}% big intersection
\newcommand{\UUm}[2]{\UU(\,#1\mid#2\,)}% big union with a middle
\newcommand{\IIm}[2]{\II(\,#1\mid#2\,)}
                                % big intersection with a middle

   % Sets
\newcommand{\contd}{\subseteq}% contained in
\newcommand{\ncontd}{\nsubseteq}% not \contd
\newcommand{\scontd}{\subset}% strictly contained in
\newcommand{\contg}{\supseteq}% containing with equality
\newcommand{\ncontg}{\nsupseteq}% not \contg
\newcommand{\nin}{\notin}% not \in
\newcommand{\empset}{\varnothing}% the empty set
\newcommand{\set}[1]{\{#1\}}% set
\newcommand{\setm}[2]{\{\,#1\mid#2\,\}}% set with a middle
\def\vect<#1>{\langle#1\rangle}% vector
```

So `$a \jj b$` produces $a \vee b$ and `$A \contd B$` produces $A \subseteq B$, and so on. The original commands are not redefined, so if a coauthor prefers `$a \vee b$` to `$a \jj b$`, the `\vee` command is available.

The commands with a "middle" are exemplified by `\setm`:

```
$\setm{x \in R}{x^2 \leq 2}$
```

typesets as $\{\, x \in R \mid x^2 \leq 2 \,\}$.

Using the `\set` command, we can type the set $\{a, b\}$ as `$\set{a,b}$`, which is easier to read than `$\{a,b\}$`. Similarly, we type `$\vect<a,b>$` for the vector $\langle a, b \rangle$,

so it looks like a vector.

Next in `newlattice.sty` I map the Greek letters to easy to remember commands. For some, I prefer to use the variants, but that is a matter of individual taste. It is also a matter of taste whether or not to change the commands for the Greek letters at all, and how far one should go in changing commonly used commands.

```
% Greek letters
\newcommand{\Gra}{\alpha}
\newcommand{\Grb}{\beta}
\newcommand{\Grc}{\chi}
\newcommand{\Grd}{\delta}
\renewcommand{\Gre}{\varepsilon}
\newcommand{\Grf}{\varphi}
\renewcommand{\Grg}{\gamma}
\newcommand{\Grh}{\eta}
\newcommand{\Gri}{\iota}
\newcommand{\Grk}{\kappa}
\newcommand{\Grl}{\lambda}
\newcommand{\Grm}{\mu}
\newcommand{\Grn}{\nu}
\newcommand{\Gro}{\omega}
\newcommand{\Grp}{\pi}
\newcommand{\Grq}{\theta}
\newcommand{\Grr}{\varrho}
\newcommand{\Grs}{\sigma}
\newcommand{\Grt}{\tau}
\newcommand{\Gru}{\upsilon}
\newcommand{\Grv}{\vartheta}
\newcommand{\Grx}{\xi}
\newcommand{\Gry}{\psi}
\newcommand{\Grz}{\zeta}

\newcommand{\GrG}{\Gamma}
\newcommand{\GrD}{\Delta}
\newcommand{\GrF}{\Phi}
\newcommand{\GrL}{\Lambda}
\newcommand{\GrO}{\Omega}
\newcommand{\GrP}{\Pi}
\newcommand{\GrQ}{\Theta}
\newcommand{\GrS}{\Sigma}
\newcommand{\GrU}{\Upsilon}
\newcommand{\GrX}{\Xi}
\newcommand{\GrY}{\Psi}
```

I also introduce some new names for text font commands by abbreviating `text` to `t` (so that `\textbf` becomes `\tbf`) and for math font commands by abbreviating `math` to `m` (so that `\mathbf` becomes `\mbf`).

```
    % Font commands
\newcommand{\tbf}{\textbf}% text bold
\newcommand{\tit}{\textit}% text italic
\newcommand{\tsl}{\textsl}% text slanted
\newcommand{\tsc}{\textsc}% text small cap
\newcommand{\ttt}{\texttt}% text typewriter
\newcommand{\trm}{\textrm}% text roman
\newcommand{\tsf}{\textsf}% text sans serif
\newcommand{\tup}{\textup}% text upright
\newcommand{\mbf}{\mathbf}% math bold
\providecommand{\mit}{\mathit}% math italic
\newcommand{\msf}{\mathsf}% math sans serif
\newcommand{\mrm}{\mathrm}% math roman
\newcommand{\mtt}{\mathtt}% math typewriter
```

The math alphabets are invoked as commands with arguments: `\Bold` for bold, `\Cal` for calligraphic, `\DD` for blackboard bold (double), and `\Frak` for fraktur (German Gothic) (see Section 8.3.2). Notice that `\Cal` and `\Euler` are different because of the option `mathscr` of the `eucal` package (see Section 8.3.1).

```
\newcommand{\Bold}[1]{\boldsymbol{#1}}
   % Bold math symbol, use as \Bold{\alpha}
\newcommand{\Cal}[1]{\mathcal{#1}}
   % Calligraphics - only caps, use as \Cal{A}
\newcommand{\DD}[1]{\mathbb{#1}}
   % Doubled - blackboard bold - only caps, use as \DD{A}
\newcommand{\Euler}[1]{\mathscr{#1}}
   % Euler Script - only caps, use as \Euler{A}
\newcommand{\Frak}[1]{\mathfrak{#1}}% Fraktur, use as \Frak{a}
```

`\Bold{A}` typesets bold italic A, $\boldsymbol{A}$; to get upright bold, use `\mathbf{A}`, which typesets as $\mathbf{A}$. Here are some commands of importance in lattice theory:

```
% Constructs
\DeclareMathOperator{\Id}{Id}
\DeclareMathOperator{\Fil}{Fil}
\DeclareMathOperator{\Con}{Con}
\DeclareMathOperator{\Aut}{Aut}
\DeclareMathOperator{\Sub}{Sub}
```

```
\DeclareMathOperator{\Pow}{Pow}
\DeclareMathOperator{\Part}{Part}
\DeclareMathOperator{\Ker}{Ker}
\newcommand{\Ji}[1]{\tup{J}(#1)} %join irreducible
\newcommand{\Mi}[1]{\tup{M}(#1)} %meet irreducible

% Generated by
\newcommand{\con}[1]{\tup{con}(#1)}
\newcommand{\sub}[1]{\tup{sub}(#1)}
\newcommand{\id}[1]{\tup{id}(#1)}
\newcommand{\fil}[1]{\tup{f{}il}(#1)}
\newcommand{\Downg}{\downarrow\!}% down-set generated by
```

Here are a few more commands and environments:

```
% Miscellaneous
\newcommand{\newl}{\newline}
\newcommand{\overl}[1]{\overline{#1}}
\newcommand{\underl}[1]{\underline{#1}}
\providecommand{\bysame}{\makebox[3em]%
                        {\hrulefill}\thinspace}
\newcommand{\iso}{\cong}% isomorphic
\def\congr#1=#2(#3){#1\equiv#2\pod{#3}}
   %congruence, use it as \congr a=b(\theta)%
\newcommand{\itemref}[1]{\eqref{#1}}
\newenvironment{enumeratei}{\begin{enumerate}%
              [\upshape (i)]}{\end{enumerate}}
   %produces (i), (ii), etc. Reference with \itemref
\newenvironment{enumeratea}{\begin{enumerate}%
              [\upshape (a)]}{\end{enumerate}}
   %produces (a), (b), etc. Reference with \itemref
\theoremstyle{plain}
\newtheorem*{namedtheorem}{\theoremname}
\newcommand{\theoremname}{testing}
\newenvironment{named}[1]{\renewcommand{\theoremname}{#1}
   \begin{namedtheorem}}
   {\end{namedtheorem}}
   %use it as \begin{named}{Name of theorem}
              %Body of theorem \end{named}
\endinput
```

For the `\congr` command see Section 15.1.8. The `enumeratei` and `named` environments are discussed in Section 15.2.1. The `enumeratea` environment is similar.

This command file, like all command files, is terminated with the `\endinput` command. In Section 18.3.2, we discuss the same rule for files that are `\include`-d.

My `newlattice.sty` evolves with time. I keep a copy in the folder of every article I write. This way, even years later, with the command file much changed, I can typeset the article with no problem.

The `\TextOrMath` command (see Section 12.3) is very useful for command files. For instance, we can use it to define our Greek letters, such as

```
\newcommand{\Gra}{\TextOrMath{$\alpha$}{\alpha}}
```

Then we can use `\Gra` both in text and math to produce α.

Read the discussion in Sections A.1.6 and A.2.6 where to put your custom command file.

15.4 The sample article with user-defined commands

In this section, we look at the `sampartu.tex` sample article (also in the `samples` folder), which is a rewrite of the `sampart.tex` sample article (see Section 11.3 and the `samples` folder) utilizing the user-defined commands collected in the command file `newlattice.sty` (see Section 15.3 and the `samples` folder).

```
% Sample file: sampartu.tex
% The sample article
% with user-defined commands and environments

\documentclass{amsart}
\usepackage{newlattice}

\theoremstyle{plain}
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}
\newtheorem{lemma}{Lemma}
\newtheorem{proposition}{Proposition}

\theoremstyle{definition}
\newtheorem{definition}{Definition}

\theoremstyle{remark}
\newtheorem*{notation}{Notation}

\numberwithin{equation}{section}

\newcommand{\Prodm}[2]{\GrP(\,#1\mid#2\,)}
   % product with a middle
```

```
\newcommand{\Prodsm}[2]{\GrP^{*}(\,#1\mid#2\,)}
   % product * with a middle
\newcommand{\vectsup}[2]{\vect<\dots,0,\dots,%
\overset{#1}{#2},\dots,0,\dots>}% special vector
\newcommand{\Dsq}{D^{\langle2\rangle}}

\begin{document}
\title[Complete-simple distributive lattices]
      {A construction of complete-simple\\
       distributive lattices}
\author{George~A. Menuhin}
\address{Computer Science Department\\
         University of Winnebago\\
         Winnebago, Minnesota 23714}
\email{menuhin@ccw.uwinnebago.edu}
\urladdr{http://math.uwinnebago.edu/homepages/menuhin/}
\thanks{Research supported by the NSF under
    grant number~23466.}
\keywords{Complete lattice, distributive lattice,
   complete congruence, congruence lattice}
\subjclass[2000]{Primary: 06B10; Secondary: 06D05}
\date{March 15, 2006}
\begin{abstract}
   In this note we prove that there exist
   \emph{complete-simple distributive lattices,} that is,
   complete distributive lattices in which
   there are only two complete congruences.
\end{abstract}
\maketitle

\section{Introduction}\label{S:intro}
In this note we prove the following result:

\begin{named}{Main Theorem}
   There exists an infinite complete distributive lattice
   $K$ with only the two trivial complete
   congruence relations.
\end{named}
\section{The $\Dsq$ construction}\label{S:Ds}
For the basic notation in lattice theory
and universal algebra, see Ferenc~R.
Richardson~\cite{fR82} and George~A. Menuhin~\cite{gM68}.
```

```
We start with some definitions:

\begin{definition}\label{D:prime}
   Let $V$ be a complete lattice, and let
   $\Frak{p} = [u, v]$ be an interval of $V$. Then
   $\Frak{p}$ is called \emph{complete-prime} if the
   following three conditions are satisfied:
   \begin{enumeratei}
      \item $u$ is meet-irreducible but $u$ is \emph{not}
         completely meet-irreducible;\label{m-i}
      \item $v$ is join-irreducible but $v$ is \emph{not}
         completely join-irreducible;\label{j-i}
      \item $[u, v]$ is a complete-simple lattice.\label{c-s}
   \end{enumeratei}
\end{definition}

Now we prove the following result:

\begin{lemma}\label{L:Dsq}
   Let $D$ be a complete distributive lattice satisfying
   conditions \itemref{m-i} and~\itemref{j-i}.
   Then $\Dsq$ is a sublattice of $D^{2}$; hence $\Dsq$
   is a lattice, and $\Dsq$ is a complete distributive
   lattice  satisfying conditions
   \itemref{m-i} and~\itemref{j-i}.
\end{lemma}

\begin{proof}
   By conditions~\itemref{m-i} and \itemref{j-i}, $\Dsq$ is a
   sublattice of $D^{2}$. Hence, $\Dsq$ is a lattice.

   Since $\Dsq$ is a sublattice of a distributive
   lattice, $\Dsq$ is a distributive lattice. Using the
   characterization of standard ideals in
   Ernest~T. Moynahan~\cite{eM57},
   $\Dsq$ has a zero and a unit element, namely,
   $\vect<0, 0>$ and $\vect<1, 1>$. To show that $\Dsq$
   is complete, let $\empset \ne A \contd \Dsq$, and let
   $a = \JJ A$ in $D^{2}$. If $a \in \Dsq$, then
   $a = \JJ A$ in $\Dsq$; otherwise, $a$ is of the form
   $\vect<b, 1>$ for some $b \in D$ with $b < 1$. Now
   $\JJ A = \vect<1, 1>$ in $D^{2}$, and
```

```
   the dual argument shows that $\MM A$ also exists in
   $D^{2}$. Hence $D$ is complete. Conditions \itemref{m-i}
   and~\itemref{j-i} are obvious for $\Dsq$.
\end{proof}
\begin{corollary}\label{C:prime}
   If $D$ is complete-prime, then so is $\Dsq$.
\end{corollary}

The motivation for the following result comes from
Soo-Key Foo~\cite{sF90}.

\begin{lemma}\label{L:ccr}
   Let $\GrQ$ be a complete congruence relation of $\Dsq$
   such that
   \begin{equation}\label{E:rigid}
      \congr \vect<1, d>=\vect<1, 1>(\GrQ),
   \end{equation}
   for some $d \in D$ with $d < 1$. Then $\GrQ = \Gri$.
\end{lemma}

\begin{proof}
   Let $\GrQ$ be a complete congruence relation of $\Dsq$
   satisfying \itemref{E:rigid}. Then $\GrQ = \Gri$.
\end{proof}

\section{The $\Grp^{*}$ construction}\label{S:P*}
The following construction is crucial to our proof of the
Main~Theorem:

\begin{definition}\label{D:P*}
   Let $D_{i}$, for $i \in I$, be complete distributive
   lattices satisfying condition~\itemref{j-i}. Their
   $\Grp^{*}$ product is defined as follows:
   \[
     \Prodsm{ D_{i} }{i \in I} =
                   \Prodm{ D_{i}^{-} }{i \in I} + 1;
   \]
   that is, $\Prodsm{ D_{i} }{i \in I}$ is
   $\Prodm{D_{i}^{-}}{i \in I}$ with a new unit element.
\end{definition}
```

```
    \begin{notation}
   If $i \in I$ and $d \in D_{i}^{-}$, then
   \[
      \vectsup{i}{d}
   \]
   is the element of $\Prodsm{ D_{i} }{i \in I}$ whose
   $i$-th component is $d$ and all the other
   components are $0$.
\end{notation}

See also Ernest~T. Moynahan~\cite{eM57a}. Next we verify:

\begin{theorem}\label{T:P*}
   Let $D_{i}$, for $i \in I$, be complete distributive
   lattices satisfying condition~\itemref{j-i}. Let $\GrQ$
   be a complete congruence relation on
   $\Prodsm{ D_{i} }{i \in I}$. If there exist
   $i \in I$ and $d \in D_{i}$ with $d < 1_{i}$ such
   that for all $d \leq c < 1_{i}$,
   \begin{equation}\label{E:cong1}
      \congr\vectsup{i}{d}=\vectsup{i}{c}(\GrQ),
   \end{equation}
   then $\GrQ = \Gri$.
\end{theorem}

\begin{proof}
   Since
   \begin{equation}\label{E:cong2}
      \congr\vectsup{i}{d}=\vectsup{i}{c}(\GrQ),
   \end{equation}
   and $\GrQ$ is a complete congruence relation, it
   follows from condition~\itemref{c-s} that
   \begin{equation}\label{E:cong}
   \begin{split}
       &\langle \dots, \overset{i}{d}, \dots, 0,
        \dots \rangle\\
       &\equiv \bigvee ( \langle \dots, 0, \dots,
        \overset{i}{c},\dots, 0,\dots \rangle \mid d
          \leq c < 1) \equiv 1 \pmod{\Theta}.
   \end{split}
   \end{equation}
```

```
      Let $j \in I$, for $j \neq i$, and let
   $a\in D_{j}^{-}$. Meeting both sides of the congruence
   \itemref{E:cong} with $\vectsup{j}{a}$, we obtain
   \begin{equation}\label{E:comp}
      \begin{split}
          0 &= \vectsup{i}{d} \mm \vectsup{j}{a}\\
            &\equiv \vectsup{j}{a}\pod{\GrQ}.
     \end{split}
   \end{equation}
  Using the completeness of $\GrQ$ and \itemref{E:comp},
  we get:
   \begin{equation}\label{E:cong3}
       \congr{0=\JJm{\vectsup{j}{a}}{ a \in D_{j}^{-} }}
       ={1}(\GrQ),
   \end{equation}
   hence $\GrQ = \Gri$.
\end{proof}

\begin{theorem}\label{T:P*a}
   Let $D_{i}$, for $i \in I$, be complete distributive
   lattices satisfying
   conditions \itemref{j-i} and~\itemref{c-s}. Then
   $\Prodsm{ D_{i} }{i \in I}$ also satisfies
   conditions~\itemref{j-i} and \itemref{c-s}.
\end{theorem}

\begin{proof}
   Let $\GrQ$ be a complete congruence on
   $\Prodsm{ D_{i} }{i \in I}$. Let $i \in I$. Define
   \begin{equation}\label{E:dihat}
      \widehat{D}_{i} = \setm{ \vectsup{i}{d} }
       { d \in D_{i}^{-} } \uu \set{1}.
   \end{equation}
   Then $\widehat{D}_{i}$ is a complete sublattice of
   $\Prodsm{ D_{i} }{i \in I}$, and $\widehat{D}_{i}$
   is isomorphic to $D_{i}$. Let $\GrQ_{i}$ be the
   restriction of $\GrQ$ to $\widehat{D}_{i}$. Since
   $D_{i}$ is complete-simple, so is $\widehat{D}_{i}$,
   hence $\GrQ_{i}$ is $\Gro$ or $\Gri$. If
   $\GrQ_{i}=\Gro$, for all $i\in I$, then $\GrQ = \Gro$.
   If there is an $i \in I$, such that $\GrQ_{i} = \Gri$,
   then $\congr0=1(\GrQ)$, and hence $\GrQ = \Gri$.
\end{proof}
```

```
The Main Theorem follows easily from Theorems~\ref{T:P*}
and \ref{T:P*a}.

\begin{thebibliography}{9}

   \bibitem{sF90}
      Soo-Key Foo, \emph{Lattice Constructions},
      Ph.D. thesis, University of Winnebago,
      Winnebago, MN, December, 1990.

   \bibitem{gM68}
      George~A. Menuhin, \emph{Universal algebra}. D.~Van
      Nostrand, Princeton, 1968.

   \bibitem{eM57}
      Ernest~T. Moynahan,
      \emph{On a problem of M. Stone},
      Acta Math. Acad. Sci. Hungar. \tbf{8} (1957),
      455--460.

   \bibitem{eM57a}
     \bysame, \emph{Ideals and congruence relations in
     lattices}.~II, Magyar Tud. Akad. Mat. Fiz. Oszt.
     K\"{o}zl. \tbf{9} (1957), 417--434  (Hungarian).

   \bibitem{fR82}
      Ferenc~R. Richardson,
      \emph{General Lattice Theory}.
      Mir, Moscow, expanded and revised ed.,
      1982 (Russian).

\end{thebibliography}
\end{document}
```

15.5 Numbering and measuring

LaTeX stores integers in *counters.* For example, the `section` counter contains the current section number. Distance measurements are saved in *length commands.* For instance, the `\textwidth` command contains the width of the text. For this book, `\textwidth` is set to 345.0 points.

In this section, we take a closer look at counters and length commands.

15.5.1 Counters

Counters may be defined by LaTeX, by document classes, by packages, or by the user.

Standard LaTeX counters

LaTeX automatically generates numbers for equations, sections, theorems, and so on. Each such number is stored in a *counter*. Table 15.2 shows the standard LaTeX counters. Their names are more or less self-explanatory. In addition, for every proclamation *name*, there is a matching counter called `name` (see Section 6.4).

Setting counters

The command for setting a counter's value is `\setcounter`. When LaTeX generates a number, it first increments the appropriate counter, so if you want the next chapter to be numbered 3, you should set the `chapter` counter to 2 by typing

```
\setcounter{chapter}{2}
```

before the `\chapter` command. The only exception to this rule is the page number, which is first used to number the current page, and then incremented. If you wanted to set the current page number to 63, you would include the command

```
\setcounter{page}{63}
```

somewhere in the page.

LaTeX initializes and increments its standard counters automatically. Sometimes you may want to manipulate them yourself. To typeset only `chapter3.tex`, the third chapter of your book, start with

```
\setcounter{chapter}{2}
\include{chapter3}
```

and when `chapter3.tex` is typeset, the chapter is properly numbered. You can also type

```
\setcounter{page}{63}
```

`equation`	`part`	`enumi`
`figure`	`chapter`	`enumii`
`footnote`	`section`	`enumiii`
`mpfootnote`	`subsection`	`enumiv`
`page`	`subsubsection`	
`table`	`paragraph`	
	`subparagraph`	

Table 15.2: Standard LaTeX counters.

if the first page of this chapter is supposed to be 63. Of course, the preferred way to typeset parts of a larger document is with the `\includeonly` command (see Section 18.3.2).

Tip If you need to manipulate counters, always look for solutions in which LaTeX does the work for you.

Defining new counters

You can define your own counters. For example,

```
\newcounter{mycounter}
```

makes `mycounter` a new counter. In the definition, you can use an optional argument, the name of another counter:

```
\newcounter{mycounter}[basecounter]
```

which automatically resets `mycounter` to `0` if `basecounter` changes value. This command has the same form as the command LaTeX uses internally for tasks such as numbering theorems and subsections within sections.

Rule ■ New counters

New counters should be defined in the preamble of the document. They should not be defined in a file read in with an `\include` command (see Section 18.3.2).

Let us suppose that you define a new counter, `mycounter`, in `chapter5.tex`, which is made part of your whole document with an `\include` command. When you typeset your document with `\includeonly` commands not including `chapter5.tex`, you get an error message, such as

```
! LaTeX Error: No counter 'mycounter' defined.
```

Counter styles

The value of `counter` can be displayed in the typeset document with the command

```
\thecounter
```

If you want to change the `counter`'s appearance when typeset, issue the command

```
\renewcommand{\the counter}{new_style}
```

Style	Command	Sample
Arabic	`\arabic{`*counter*`}`	1, 2, ...
Lowercase Roman	`\roman{`*counter*`}`	i, ii, ...
Uppercase Roman	`\Roman{`*counter*`}`	I, II, ...
Lowercase Letters	`\alph{`*counter*`}`	a, b, ..., z
Uppercase Letters	`\Alph{`*counter*`}`	A, B, ..., Z

Table 15.3: Counter styles.

where *new_style* specifies the `counter` modified as shown in Table 15.3. The default style is arabic. For instance, if you give the command

```
\renewcommand{\thetheorem}{\Alph{theorem}}
```

then the theorems appear as **Theorem A**, **Theorem B**, ...

Here is a more complicated example for a book:

```
\renewcommand{\thechapter}{\arabic{chapter}}
\renewcommand{\thesection}{\thechapter-\arabic{section}}
\renewcommand{\thesubsection}%
    {\thechapter-\arabic{section}.\arabic{subsection}}
```

With these definitions, Section 1 of Chapter 3 is numbered in the form 3-1 and Subsection 2 of Section 1 of Chapter 3 is numbered in the form 3-1.2.

The `\pagenumbering` command is a shorthand method for setting the page numbering in a given style. For instance, `\pagenumbering{roman}` numbers pages as i, ii, and so on.

The `subequations` environment (see Section 8.5) uses `parentequation` as the counter for the whole equation group and it uses `equation` as the counter for the subequations. To change the default format of the equation numbers from (2a), (2b), and so forth, to (2i), (2ii), and so on, type the following line inside the `subequations` environment

```
\renewcommand{\theequation}%
           {\theparentequation\roman{equation}}
```

If you want equation numbers like (2.i), (2.ii), and so on, type

```
\renewcommand{\theequation}%
             {\theparentequation.\roman{equation}}
```

Counter arithmetic

The `\stepcounter{counter}` command increments `counter` and sets all the counters that were defined with the optional argument `counter` to `0`. The variant

```
\refstepcounter{counter}
```

does the same, and also sets the value for the next `\label` command.

You can do some arithmetic with the command

```
\addtocounter{counter}{n}
```

where *n* is an integer. For example,

```
\setcounter{counter}{5}
\addtocounter{counter}{2}
```

sets `counter` to 7.

The value stored in a counter can be accessed using the `\value` command, which is mostly used with the `\setcounter` or `\addtocounter` commands. For instance, you can set `counter` to equal the value of another counter, `oldcounter`, by typing

```
\setcounter{counter}{\value{oldcounter}}
```

Here is a typical example of counter manipulation. You might want a theorem (invoked in a `theorem` environment) to be followed by several corollaries (each in a `corollary` environment) starting with Corollary 1. In other words, Theorem 1 should be followed by Corollary 1, Corollary 2, and so forth and so should Theorem 3. By default, LaTeX numbers the next corollary as Corollary 3, even if it follows another theorem. To tell LaTeX to start numbering the corollaries from 1 again, issue the command

```
\setcounter{corollary}{0}
```

after each theorem. But such a process is error-prone, and goes against the spirit of LaTeX.

Instead, follow my advice on page 400, and let LaTeX do the work for you. In the preamble, type the proclamations

```
\newtheorem{theorem}{Theorem}
\newtheorem{corollary}{Corollary}[theorem]
```

We are almost there. Theorem 1 now is followed by Corollary 1.1, Corollary 1.2 and Theorem 3 by Corollary 3.1. If we redefine `\thecorollary`,

```
\renewcommand{\thecorollary}{\arabic{corollary}}
```

then Theorem 1 is followed by Corollary 1 and Corollary 2, and Theorem 3 is also

followed by Corollary 1.

If you need to perform more complicated arithmetic with counters, use Kresten K. Thorup and Frank Jensen's `calc` package (see Section 12.3.1). This package is discussed in Section A.3.1 of *The LaTeX Companion,* 2nd edition [46].

Two special counters

The `secnumdepth` and `tocdepth` counters control which sectional units are numbered and which are listed in the table of contents, respectively. For example,

```
\setcounter{secnumdepth}{2}
```

sets `secnumdepth` to 2. As a result, chapters—if they are present in the document class—sections, and subsections are numbered, but subsubsections are not. This command must be placed in the preamble of the document. `tocdepth` is similar.

15.5.2 Length commands

While a counter contains integers, a length command contains a *real number* and a *dimensional unit.*

LaTeX recognizes many different dimensional units. We list five *absolute* units:

- `cm` centimeter
- `in` inch
- `pc` pica (`1 pc = 12 pt`)
- `pt` point (`1 in = 72.27 pt`)
- `mm` millimeter

and two *relative* units:

- `em`, approximately the width of the letter M in the current font
- `ex`, approximately the height of the letter x in the current font

LaTeX defines many length commands. For instance, Section 4.1 of *The LaTeX Companion,* 2nd edition [46] lists 17 length commands for page layout alone. You can find some of them in Figure 10.4. A list environment sets about a dozen additional length commands (see Figure 15.2). Length commands are defined for almost every aspect of LaTeX's work, including displayed math environments—a complete list would probably contain a few hundred. Many are listed in Leslie Lamport's *LaTeX: A Document Preparation System,* 2nd edition [43] and in *The LaTeX Companion,* 2nd edition [46]. Many more are hidden in packages such as `amsmath`.

The most common length commands are:

- `\parindent`, the amount of indentation at the beginning of a paragraph
- `\parskip`, the extra vertical space inserted between paragraphs
- `\textwidth`, the width of the text on a page

A more esoteric example is `\marginparpush`, the minimum vertical space between two marginal notes. Luckily, you do not have to be familiar with many length commands because LaTeX and the document class set them for you.

Defining new length commands

You can define your own length commands. For example,

```
\newlength{\mylength}
```

makes `\mylength` a new length command with a value of 0 points. Note that while you have to type

```
\newcounter{counter}
```

to get a new counter, typing

```
\newlength{mylength}
```

results in an error message such as

```
! Missing control sequence inserted.
<inserted text>
                \inaccessible
l.3 \newlength{mylength}
```

Setting length

The `\setlength` command sets or resets the value of a length command. So

```
\setlength{\textwidth}{3in}
```

creates a very narrow page. The first argument of `\setlength` must be a length command, not simply the command name, that is

```
\setlength{textwidth}{3in} % Bad
```

is incorrect. The second argument of `\setlength` must be a real number with a dimensional unit, for instance, `3in`, and *not simply a real number.* In other words,

```
\setlength{\textwidth}{3} % Bad
```

is also incorrect.

Tip A common mistake is to type a command such as

```
\setlength{\marginpar}{0}
```

Instead, type

```
\setlength{\marginpar}{0pt}
```

Always be sure to include a dimensional unit.

The `\addtolength` command adds a quantity to the value of a length command. For instance,

```
\addtolength{\textwidth}{-10pt}
```

narrows the page width by 10 points.

If you define

```
\newlength{\shorterlength}
\setlength{\shorterlength}{\mylength}
\addtolength{\shorterlength}{-.5in}
```

then `\parbox{\shorterlength}{...}` always typesets its second argument in a box 1/2 inch narrower than the parboxes set to be of width `\mylength`.

When LaTeX typesets some text or math, it creates a box. Three measurements are used to describe the size of the box:

- the width
- the height, from the baseline to the top
- the depth, from the baseline to the bottom

as illustrated in Figure 15.1. For instance, the box typesetting "aa" has a width of 10.00003 pt, a height of 4.30554 pt, and a depth of 0 pt. The box typesetting "ag" has

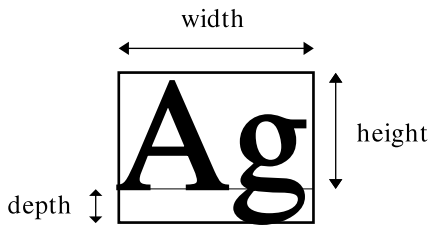

Figure 15.1: The measurements of a box.

the same width and height, but a depth of 1.94444 pt. The box "Ag" (see Figure 15.1) has a width of 12.50003 pt, a height of 6.83331 pt, and a depth of 1.94444 pt.

The commands

```
\settowidth
\settoheight
\settodepth
```

each take two arguments. The first argument is a length command, the second is text (or math) to be measured by LaTeX. The corresponding measurement of the box in which the second argument is typeset is assigned to the length command in the first argument. For example, if `\mylength` is a length command, then

```
\settowidth{\mylength}{Ag}
```

assigns 12.50003 pt to `\mylength`. It should be clear from this example how the `\phantom` and `\hphantom` commands (see Section 5.8.1) are related to this command.

To perform more complicated arithmetic with length commands, use the `calc` package.

Rubber lengths

In addition to rigid lengths, such as `3in`, LaTeX can also set *rubber lengths,* that is, lengths that are allowed to stretch and shrink. Here is an example:

```
\setlength{\stretchspace}{3in plus 10pt minus 8pt}
```

Assuming that `\stretchspace` is a length command, this command assigns it a value of 3 inches that can stretch by 10 points or shrink by 8 points, if necessary. So a box of width `\stretchspace` is 3 inches wide, plus up to 10 points, or minus up to 8 points.

Stretchable vertical spaces are often used before and after displayed text environments. LaTeX adjusts these spaces to make the page look balanced. An example can be found in Section 15.1.7. `\medskipamount` is defined as

```
6.0pt plus 2.0pt minus 2.0pt
```

See Section 15.6.3 for more examples.

The `\fill` command is a special rubber length that can stretch any amount. The stretching is done evenly if there is more than one `\fill` present. See the second example of brand-new environments in Section 15.2.5.

15.6 Custom lists

Although there are three ready-made list environments provided by LaTeX (see Section 6.2), it is often necessary to create one of your own using LaTeX's `list` environment. In fact, LaTeX itself uses the `list` environment to define many of its standard environments, including:

- The three list environments (Section 6.2)
- The `quote`, `quotation`, and `verse` environments (Section 6.8)
- Proclamations (Section 6.4)
- The style environments `center`, `flushleft`, and `flushright` (Section 6.3)
- The `thebibliography` environment (Section 10.5.1)
- The `theindex` environment (Section 10.5.2)

15.6.1 Length commands for the `list` environment

The general layout of a list is shown in Figure 15.2. It uses six horizontal measurements and three vertical measurements. I now list these length commands.

Vertical length commands

`\topsep` is most of the vertical space between the first item and the preceding text, and also between the last item and the following text. This space also includes `\parskip`, the extra vertical space inserted between paragraphs, and optionally, `\partopsep`, provided that the list environment starts a new paragraph.

`\parsep` is the space between paragraphs of the same item.

`\itemsep` is the space between items. Like `\topsep`, the actual gap is the sum of `\itemsep` and `\parsep`.

All of these vertical length commands are rubber lengths (see Section 15.5.2).

Horizontal length commands

By default, the margins of a `list` environment are the same as the margins of the surrounding text. If the list is nested within a list, the margins are wider and so the text is narrower.

The `\leftmargin` and `\rightmargin` length commands specify the distance between the edge of the item box and the left and right margins of the page.

The `label` is the text provided by the optional argument of an `\item` command or provided as a default in the definition of the list environment. It is typeset in a box of width `\labelwidth`, which is indented `\itemindent` units from the left margin, and separated by a space of `\labelsep` units from the text box. If the label is too wide to fit in the box, it is typeset at its full natural width, and the first line in the text box is indented.

The second and subsequent paragraphs of an item are typeset with their first lines indented by `\listparindent` units.

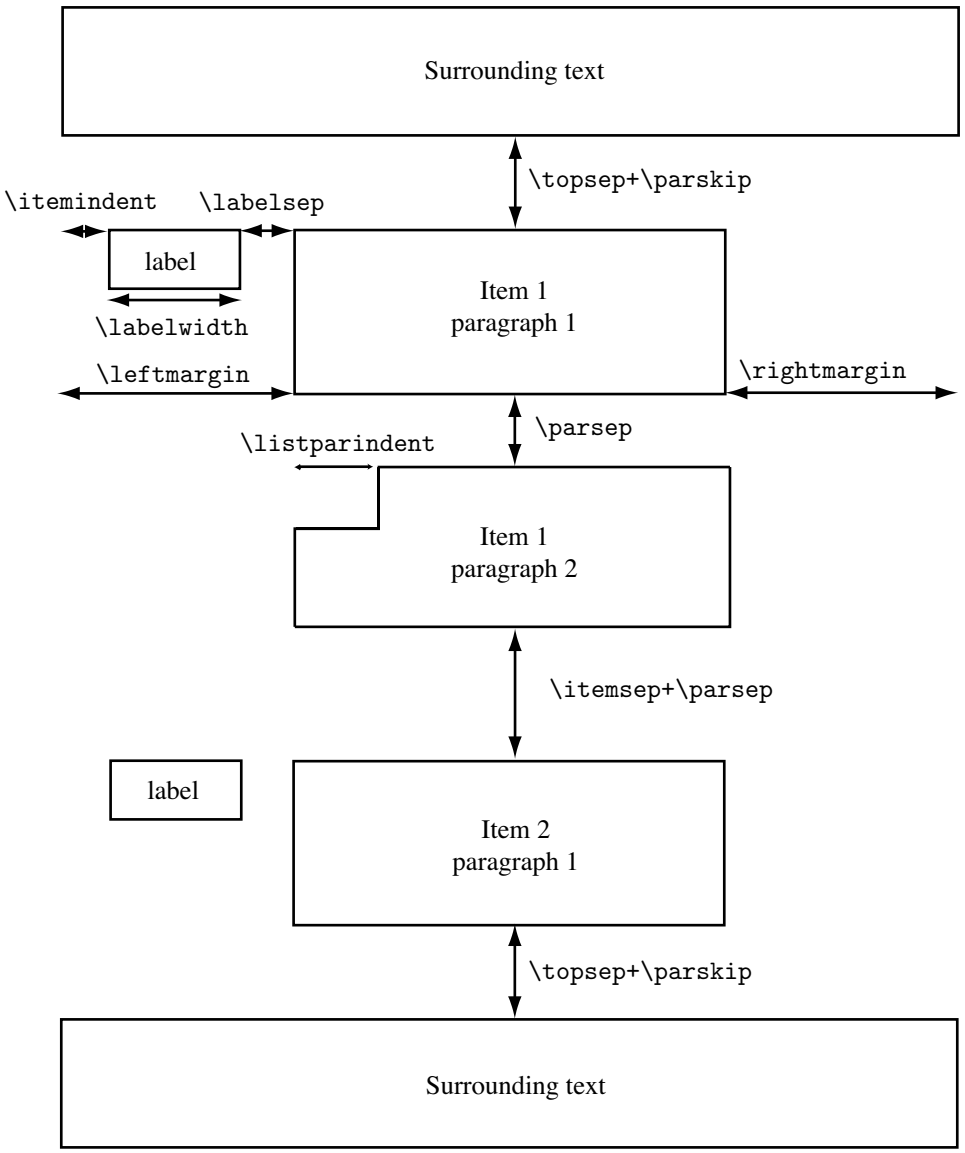

Figure 15.2: The layout of a custom list.

15.6.2 The `list` environment

Custom lists are created with the `list` environment, which is invoked as follows:

```
\begin{list}{default_label}{declarations}
   \item item1
   \item item2
   ...
\end{list}
```

The arguments are

- *default_label*, the label for any items that do not specify their own, similar to the optional argument of the `\item` command
- *declarations*, the vertical and horizontal length commands and any other required parameters for the list

Here is a very simple example:

Here are the most important LaTeX rules about spaces in text, sentences, and paragraphs:

- ♢ **Rule 1:** Two or more spaces in text are the same as one.
- ♢ **Rule 2:** A blank line (that is, two end-of-line characters separated only by blanks and tabs) indicates the end of a paragraph.

Rules 1 and 2 make typing and copying very convenient.

I have used the ♢ math symbol (`$\diamondsuit$`) as a default label, and I set the item box 0.5 inch from either margin. So this example is typed as follows:

```
\noindent Here are the most important \LaTeX\ rules about
spaces in text, sentences, and paragraphs:
\begin{list}{$\diamondsuit$}{\setlength{\leftmargin}%
            {.5in}\setlength{\rightmargin}{.5in}}
\item \textbf{Rule 1:} Two or more spaces in text
are the same as one.
\item \textbf{Rule 2:} A blank line (that is, two
end-of-line characters separated only by blanks and tabs)
indicates the end of a paragraph.
\end{list}
Rules 1 and~2 make typing and copying very convenient.
```

Here is a second variant:

Here are the most important LaTeX rules about spaces in text, sentences, and paragraphs:

Rule 1: Two or more consecutive spaces in text are the same as one.

Rule 2: A blank line (that is, two end-of-line characters separated only by blanks and tabs) indicates the end of a paragraph.

Rules 1 and 2 make typing and copying very convenient.

In this example, I dropped the optional *default_label* and typed **Rule 1:** and **Rule 2:** as (optional) arguments of the `\item` commands:

```
\noindent Here are the most important \LaTeX\ rules about
spaces in text, sentences, and paragraphs:
\begin{list}{}{\setlength{\leftmargin}{.5in}%
               \setlength{\rightmargin}{.5in}}
\item[\textbf{Rule 1:}] Two or more consecutive spaces in
text are the same as one.
\item[\textbf{Rule 2:}] A blank line (that is,
two end-of-line characters separated only by blanks and
tabs) indicates the end of a paragraph.
\end{list}
Rules 1 and~2 make typing and copying very convenient.
```

For further simple examples, you can look at various document class files to see how standard environments such as `verse`, `quote`, and so on, are defined.

Using counters

It is not very LaTeX-like to provide the numbers for the rules in the examples above. It would be more logical for LaTeX to do the numbering. The following is a more LaTeX-like coding of the second example:

```
\noindent Here are the most important \LaTeX\ rules about
spaces in text, sentences, and paragraphs:
\newcounter{spacerule}
\begin{list}{\textbf{Rule \arabic{spacerule}:}}
            {\setlength{\leftmargin}{.5in}
             \setlength{\rightmargin}{.5in}
             \usecounter{spacerule}}
  \item Two or more consecutive spaces in text are the
  same as one.\label{Li:Twoor}
  \item A blank line (that is, two end-of-line
```

```
    characters separated only by blanks and tabs)
    indicates the end of a paragraph.\label{Li:blankline}
\end{list}
Rules \ref{Li:Twoor} and~\ref{Li:blankline} make typing
and copying very convenient.
```

Note that

1. I declared the counter before the `list` environment with the line

   `\newcounter{spacerule}`

2. I defined the *`default_label`* as

   `\textbf{Rule \arabic{spacerule}:}` item In the *`declarations`*, I specified that the list should use the `spacerule` counter with the command

   `\usecounter{spacerule}`

15.6.3 Two complete examples

In the previous examples, I set the values of `\leftmargin` and `\rightmargin`. The other length commands were not redefined, so their values remained the values set by the document class. In the following examples, I set the values of many more length commands.

Example 1 To get the following list,

Here are the most important LaTeX rules about spaces in text, sentences, and paragraphs:

Rule 1: *Two or more consecutive spaces in text are the same as one.*

Rule 2: *A blank line—that is, two end-of-line characters separated only by blanks and tabs—indicates the end of a paragraph.*

Rules 1 and 2 make typing and copying very convenient.

we type

```
\noindent Here are the most important \LaTeX\ rules about
spaces in text, sentences, and paragraphs:
\newcounter{spacerule}
\begin{list}{\upshape\bfseries Rule \arabic{spacerule}:}
```

```
            {\setlength{\leftmargin}{1.5in}
             \setlength{\rightmargin}{0.6in}
             \setlength{\labelwidth}{1.0in}
             \setlength{\labelsep}{0.2in}
             \setlength{\parsep}{0.5ex plus 0.2ex
                                 minus 0.1ex}
             \setlength{\itemsep}{0ex plus 0.2ex
                                  minus 0ex}
             \usecounter{spacerule}
             \itshape}
   \item Two or more consecutive spaces in text are the
   same as one.\label{Li:Twoor}
   \item A blank line---that is, two end-of-line
    characters separated only by blanks and
                          tabs---indicates
    the end of a paragraph.\label{Li:blankline}
\end{list}
Rules \ref{Li:Twoor} and~\ref{Li:blankline} make typing
and copying very convenient.
```

Note that

1. I declared the counter as in the previous example.
2. The last item in *declarations* is `\itshape`, which typesets the entire list in italics.
3. The *default_label* is defined as

   ```
   \upshape\bfseries Rule \arabic{spacerule}
   ```

   My first attempt was to define it as

   ```
   \bfseries Rule \arabic{spacerule}
   ```

   which typesets `Rule` in bold italics (because in Step 2 we set the whole list in italics). To force the label to be typeset upright, I start the *default_label* with the `\upshape` command.
4. The left margin is set to 1.5 inches and the right margin to 0.6 inches:

   ```
   \setlength{\leftmargin}{1.5in}
   \setlength{\rightmargin}{0.6in}
   ```

5. Next I set the width of the label to 1 inch, and the space between the label and the item to 0.2 inches:

```
\setlength{\labelwidth}{1.0in}
\setlength{\labelsep}{0.2in}
```

6. Finally, I set the paragraph separation to 0.5 ex, allowing stretching by 0.2 ex and shrinking by 0.1 ex, and the item separation to 0 ex, allowing stretching by 0.2 ex and no shrinking, by

   ```
   \setlength{\parsep}{0.5ex plus 0.2ex minus 0.1ex}
   \setlength{\itemsep}{0ex plus 0.2ex minus 0ex}
   ```

   The actual amount of item separation is calculated by adding the values specified for `\parsep` and `\itemsep`.

A complicated list such as this should be defined as a new environment. For example, you could define a `myrules` environment:

```
\newenvironment{myrules}
   {\begin{list}
      {\upshape \bfseries Rule \arabic{spacerule}:}
      {\setlength{\leftmargin}{1.5in}
        \setlength{\rightmargin}{0.6in}
        \setlength{\labelwidth}{1.0in}
        \setlength{\labelsep}{0.2in}
        \setlength{\parsep}{0.5ex plus 0.2ex minus 0.1ex}
        \setlength{\itemsep}{0ex plus 0.2ex minus 0ex}
        \usecounter{spacerule}
        \itshape} }
   {\end{list}}
```

and then use it anywhere, as in

```
\begin{myrules}
   \item Two or more consecutive spaces in text are the
    same as one.\label{Li:Twoor}
   \item A blank line---that is, two end-of-line
    characters separated only by blanks and
    tabs---indicates the end of a paragraph.
                        \label{Li:blankline}
\end{myrules}
Rules \ref{Li:Twoor} and~\ref{Li:blankline} make typing
and copying very convenient.
```

which typesets as the first example shown on page 411.

Example 2 In Section 5.7.2, we discussed the formatting of the following type of glossary:

sentence is a group of words terminated by a period, exclamation point, or question mark.

paragraph is a group of sentences terminated by a blank line or by the `\par` command.

Now we can create the glossary as a custom list:

```
\begin{list}{}
   {\setlength{\leftmargin}{30pt}
     \setlength{\rightmargin}{0pt}
     \setlength{\itemindent}{14pt}
     \setlength{\labelwidth}{40pt}
     \setlength{\labelsep}{5pt}
     \setlength{\parsep}{0.5ex plus 0.2ex minus 0.1ex}
     \setlength{\itemsep}{0ex plus 0.2ex minus 0ex}}
   \item[\textbf{sentence}\hfill] is a group of words
   terminated by a period, exclamation point,
   or question mark.
   \item[\textbf{paragraph}\hfill] is a group of sentences
    terminated by a blank line or by the \com{par} command.
\end{list}
```

There is nothing new in this example except the `\hfill` commands in the optional arguments to left adjust the labels. With the long words in the example this adjustment is not necessary, but it would be needed for shorter words.

See Section 3.3 of *The LaTeX Companion,* 2nd edition [46] on how to customize the three standard list environments and also for more complicated custom lists.

15.6.4 *The* `trivlist` *environment*

LaTeX also provides a `trivlist` environment, meant more for programmers than users. The environment is invoked in the form

```
\begin{trivlist}
   body
\end{trivlist}
```

It is similar to the `list` environment except that there are no arguments, and all the length commands are trivially set, most to 0 points, except for `\listparindent` and `\parsep`, which are set to equal `\parindent` and `\parskip`, respectively. For instance, LaTeX defines the `center` environment as follows:

```
\begin{trivlist}
   \centering \item[]
\end{trivlist}
```

15.7 The dangers of customization

We can customize LaTeX in so many ways. We can add packages to expand its power and define new commands that better suit our work habits. These enhance LaTeX and make it easier to work with. But they also introduce difficulties. Let us start with the obvious.

Whoever introduced the command `\textcompwordmark` knew that—even if we use command completion—we are not going to type

```
if\textcompwordmark f
```

to avoid having a ligature (see Section 5.4.6). It is a lot of typing, and the source file becomes hard to read. This cries out for a user-defined command, say, `\Iff`, which is short and *readable* (see Section 15.1.1).

When introducing user-defined commands, watch out for the following traps.

Trap 1 ■ Redefining a command that is a necessary part of LaTeX.

This is easy to avoid. As discussed in Section 15.1.7, you can easily find out whether a command is already in use. If it is, do not redefine it unless you really know what you are doing.

Trap 2 ■ Defining too many commands.

This creates two problems. Your editor has a hard time making changes in your source file. And a few years later, when you want to reuse the material, you have a difficult time understanding all those clever commands.

Trap 3 ■ Your contribution appears in a volume with many other authors and your user-defined commands create conflicts.

As your article appears in a publication, some parts of it are used for the whole volume. The title and maybe even the section titles are used in the table of contents. The abstracts may be collected for the whole volume or there may be a joint bibliography.

With the advent of the internet, there are now collections of thousands of math articles; PlanetMath.org is one example. Write your articles so that even the editors of PlanetMath.org can use it.

Rule 1 ■ Do not use your own commands in the title of the article, in the abstract, in section titles, in the bibliography, or in captions of figures and tables.

Trap 4 ■ You submit the article to a journal that does not permit a separate custom command file.

For such journals, just copy the needed user-defined commands into the preamble of your article. Go through the list and **delete those user-defined commands that are not used in this article**. This helps the editor to look up your commands from a shorter list.

Rule 2 ■ Introduce judiciously user-defined commands with very short names.

Introducing one-letter commands—for instance, using `\C` for the complex field—is dangerous because many one-letter commands are reserved by LaTeX.

Two-letter user-defined commands are not quite this bad. Of the 2,500 or so possibilities only a few dozen are used by LaTeX. The danger here is, of course, conflict with other authors and confusion for the editor. My command file has about 15 two-letter commands. For instance `\jj`, part of the `\jj`, `\JJ`, `\JJm` family. Also `\Id`, because Id is the standard notation for ideal lattices. Some editors may think that this is 15 too many.

Rule 3 ■ Do not use `\def` to define your commands, with the exception of a very few delimited commands.

Using `\def` means giving up LaTeX's built in defense. In the editorial office of my journal, about half the submitted articles that we cannot typeset violate this rule.

Rule 4 ■ Do not redefine length commands, especially, if you do not know what other length commands are computed based on the ones you change.

The page layout diagram, Figure 10.4, should provide examples. Even simpler, *Do not redefine length commands.* Let the document class define them for your article.

Rule 5 ■ Make sure that the packages you use are compatible.

For instance, the popular `psfrag` and `epsfig` packages cause problems if used with the AMS packages.

Be cautious when you use packages that redefine a lot of LaTeX commands, such as `hyperref` (see Section 13.2).

You can read more about the plight of authors in the hands of incompetent editors in my article [31] and the difficult job of editors with articles violating the above rules in Enrico Gregorio [16].

CHAPTER

16

BIBTEX

The BIBTEX application, written by Oren Patashnik, assists LATEX users in compiling bibliographies, especially long ones. Short bibliographies can easily be placed in the document directly (see Section 10.5.1).

It takes a little effort to learn BIBTEX. But in the long run, the advantages of building bibliographic databases that can be reused and shared outweigh the disadvantage of a somewhat steep learning curve.

The *bibliographic database files*, the `bib` files, contain the *bibliographic entries*. We discuss the format of these entries in Section 16.1, and then describe how to use BIBTEX to create bibliographies in Section 16.2.

BIBTEX uses a style, called a *bibliographic style,* or `bst` file, to format entries. On the next two pages we show the bibliography of the `sampartb.tex` sample article typeset with six different style files.

To simplify our discussion, in the rest of this chapter I discuss only one style, the AMS plain style, `amsplain.bst`, version 2.0. All of the examples shown are in this style, and several of the comments I make are true only for the AMS plain style. If you choose to use a different style, you should check its documentation for special rules.

[1] Soo-Key Foo. *Lattice Constructions*. PhD thesis, University of Winnebago, Winnebago, MN, December 1990.
[2] George A. Menuhin. *Universal Algebra*. D. van Nostrand, Princeton, 1968.
[3] Ernest T. Moynahan. Ideals and congruence relations in lattices. II. *Magyar Tud. Akad. Mat. Fiz. Oszt. Közl.*, 7:417–434, 1957.
[4] Ernest T. Moynahan. On a problem of M. Stone. *Acta Math. Acad. Sci. Hungar.*, 8:455–460, 1957.
[5] Ferenc R. Richardson. *General Lattice Theory*. Mir, Moscow, expanded and revised edition, 1982.

plain.bst

[Foo90] Soo-Key Foo. *Lattice Constructions*. PhD thesis, University of Winnebago, Winnebago, MN, December 1990.
[Men68] George A. Menuhin. *Universal Algebra*. D. van Nostrand, Princeton, 1968.
[Moy57a] Ernest T. Moynahan. Ideals and congruence relations in lattices. II. *Magyar Tud. Akad. Mat. Fiz. Oszt. Közl.*, 7:417–434, 1957.
[Moy57b] Ernest T. Moynahan. On a problem of M. Stone. *Acta Math. Acad. Sci. Hungar.*, 8:455–460, 1957.
[Ric82] Ferenc R. Richardson. *General Lattice Theory*. Mir, Moscow, expanded and revised edition, 1982.

alpha.bst

1. Soo-Key Foo, *Lattice constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990.
2. George A. Menuhin, *Universal algebra*, D. van Nostrand, Princeton, 1968.
3. Ernest T. Moynahan, *Ideals and congruence relations in lattices.* II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **7** (1957), 417–434 (Hungarian).
4. ———, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
5. Ferenc R. Richardson, *General lattice theory*, expanded and revised ed., Mir, Moscow, 1982 (Russian).

amsplain.bst

[Foo90] Soo-Key Foo, *Lattice constructions*, Ph.D. thesis, University of Winnebago, Winnebago, MN, December 1990.
[Men68] George A. Menuhin, *Universal algebra*, D. van Nostrand, Princeton, 1968.
[Moy57a] Ernest T. Moynahan, *Ideals and congruence relations in lattices.* II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl. **7** (1957), 417–434 (Hungarian).
[Moy57b] Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
[Ric82] Ferenc R. Richardson, *General lattice theory*, expanded and revised ed., Mir, Moscow, 1982 (Russian).

amsalpha.bst

[1] S.-K. Foo, *Lattice Constructions*, PhD thesis, University of Winnebago, Winnebago, MN, Dec. 1990.
[2] G. A. Menuhin, *Universal Algebra*, D. van Nostrand, Princeton, 1968.
[3] E. T. Moynahan, *Ideals and congruence relations in lattices*. II, Magyar Tud. Akad. Mat. Fiz. Oszt. Közl., 7 (1957), pp. 417–434.
[4] ———, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar., 8 (1957), pp. 455–460.
[5] F. R. Richardson, *General Lattice Theory*, Mir, Moscow, expanded and revised ed., 1982.

`siam.bst`

[1] F. R. Richardson, *General Lattice Theory*. Moscow: Mir, expanded and revised ed., 1982.
[2] G. A. Menuhin, *Universal Algebra*. Princeton: D. van Nostrand, 1968.
[3] E. T. Moynahan, "On a problem of M. Stone," *Acta Math. Acad. Sci. Hungar.*, vol. 8, pp. 455–460, 1957.
[4] S.-K. Foo, *Lattice Constructions*. PhD thesis, University of Winnebago, Winnebago, MN, Dec. 1990.
[5] E. T. Moynahan, "Ideals and congruence relations in lattices. II," *Magyar Tud. Akad. Mat. Fiz. Oszt. Közl.*, vol. 7, pp. 417–434, 1957.

`ieeetr.bst`

16.1 The database

A BibTeX database is a text file containing bibliographic entries. To use BibTeX, you first have to learn how to assemble a database. This section explains how to do that.

There may be special tools available for your computer system that assist you in building and maintaining your bibliographic data. Such tools make compiling the data easier and may minimize formatting errors.

You can find all the examples in this section in the `template.bib` file in the `samples` folder (see page 4).

16.1.1 Entry types

A bibliographic entry is given in pieces called *fields*. The style (see Section 16.2.2) specifies how these fields are typeset. Here are two typical entries:

```
@BOOK{gM68,
   author = "George A. Menuhin",
   title = "Universal Algebra",
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   year = 1968,
   }
```

```
 @ARTICLE{eM57,
author = "Ernest T. Moynahan",
title = "On a Problem of {M. Stone}",
journal = "Acta Math. Acad. Sci. Hungar.",
pages = "455-460",
volume = 8,
year = 1957,
}
```

The start of an entry is indicated with an at sign (`@`) followed by the *entry type*. In the first example, the entry type is `BOOK`, while in the second, it is `ARTICLE`. The entry type is followed by a left brace (`{`). The matching right brace (`}`) indicates the end of the entry. BIBTEX also allows you to use parentheses as delimiters for an entry. In this book, however, we use braces to enclose an entry.

The string `@BOOK{` is followed by a *label*, `gM68`, which designates the name of the entry. Refer to this entry in your document with `\cite{gM68}`. The label is followed by a comma and a series of fields. In this example, there are five fields, `author`, `title`, `publisher`, `address`, and `year`. Each field starts with the field name, followed by `=` and the value of the field enclosed in double quotes (`"`). Be sure to use `"` and *not* LATEX double quotes (`` `` `` or `''`). Alternatively, BIBTEX also allows you to use braces to enclose the field value. In this book, we use double quotes to enclose a field.

Numeric field values, that is, fields consisting entirely of digits, do not need to be enclosed in double quotes or braces, for instance, `year` in the examples above, `volume` in the second example, and `number` in some of the examples that follow. Page ranges, such as `455-460`, are not numeric field values since they contain `-`, so they must be enclosed in double quotes or braces.

There *must* be a comma before each field. The comma before the first field is placed after the label.

There are many standard entry types, including

`ARTICLE` an article in a journal or magazine

`BOOK` a book with an author (or editor) and a publisher

`BOOKLET` a printed work without a publisher

`INBOOK` a part of a book, such as a chapter or a page range that, in general, is not titled or authored separately

`INCOLLECTION` a part of a book with its own title and perhaps author

`INPROCEEDINGS` an article in a conference proceedings with its own title and author

`MANUAL` technical documentation

`MASTERSTHESIS` a master's thesis

`MISC` an entry that does not fit in any other category

`PHDTHESIS` a Ph.D. thesis

`PROCEEDINGS` the proceedings of a conference

`TECHREPORT` a report published by a school or institution

`UNPUBLISHED` an unpublished paper

Each entry includes a number of *fields* from the following list:

`address`	`institution`	`pages`
`author`	`journal`	`publisher`
`booktitle`	`key`	`school`
`chapter`	`language`	`series`
`crossref`	`month`	`title`
`edition`	`note`	`type`
`editor`	`number`	`volume`
`howpublished`	`organization`	`year`

The style you choose determines which of the fields within an entry are actually used. All the others are ignored. You may also add fields for your own use. For example, you may want to add a `mycomments` field for personal comments. Such fields are ignored unless you have a bibliography style that uses them.

Commonly used examples of new field names include `URL`, `abstract`, `ISBN`, `keywords`, `mrnumber`, and so on. The `language` field is used by the AMS styles but not by any of the other styles mentioned in this chapter.

Tip

1. BIBTEX does not care whether you use uppercase or lowercase letters (or mixed) for the names of entry types and fields. In this book, the entry types are shown in uppercase and field names in lowercase.

2. Placing a comma after the last field is optional. I recommend that you put it there so that when you append a new field to the entry, the required comma separating the fields is present.

For each entry type there are both required and optional fields. Later in this section, I give two examples of each entry type. The first example of an entry type uses a small set of fields, while the second example is a maximal one, showing a large number of optional fields.

16.1.2 Typing fields

Make sure you type the field names correctly. If you misspell one, BIBTEX ignores the field. BIBTEX also warns you if a required field is missing.

The `author` and `editor` fields require a name.

Rule ■ Names

1. Most names can be typed as usual, `"Ernest T. Moynahan"` or `"Moynahan, Ernest T."`, with one comma separating the family name from the given names.
2. Type two or more names separated by `and`. For instance,

   ```
   author= "George Blue and Ernest Brown and Soo-Key Foo",
   ```

3. The family name of Miguel Lopez Fernandez is Lopez Fernandez, so type it as `"Lopez Fernandez, Miguel"`. This informs BIBTEX that Lopez is not a middle name.
4. Type Orrin Frink, Jr. as `"Frink, Jr., Orrin"`.

Rules 3 and 4 are seldom needed. In a bibliography of about 1,500 items, I found fewer than 10 names that could not be typed as usual. Note that you can type John von Neumann as `"John von Neumann"` or `"von Neumann, John"`. Because BIBTEX knows about `von`, it handles the name properly.

There are a few rules concerning the `title` field.

Rule ■ Title

1. You should not put a period at the end of a title. The style supplies the appropriate punctuation.
2. Many styles, including the AMS styles, convert titles, except for the first letter of the title, to lowercase for all entry types. If you want a letter to appear in uppercase, put it—or the entire word—in braces. The same rule applies to the `edition` field. Some other styles only do this conversion for the titles of non-book-like entries.
3. To maximize the portability of your database, you should type titles with each important word capitalized:

   ```
   title = "On a Problem of {M. Stone}",
   ```

   The style used in this book, `amsplain.bst`, converts `Problem` to `problem`, so it

makes no difference, but some styles do not. To be on the safe side, you should capitalize all words that may have to be capitalized.

For the record, here are the complete rules for titles: Capitalize (1) the first word; (2) the first word in a subtitle (BibTeX assumes that a subtitle follows a colon, so it capitalizes the first word after a colon—a colon not introducing a subtitle should be typed in braces); (3) all other words except articles, unstressed conjunctions, and unstressed prepositions. Words that should never be converted to lowercase, for example proper names such as `Hilbert`, should be enclosed in braces to prevent them from being converted to lowercase. In the example above, two letters in the title should not be converted to lowercase, so we enclosed `M. Stone` in braces. We could also have typed `{M. S}tone` or `{M.} {S}tone`.

BibTeX and the style automatically handle a number of things for you that you would have to handle yourself when typing text.

1. You do not have to mark periods in abbreviations, as `.\␣` in the names of journals (see Section 5.2.2). So

   ```
   journal = "Acta Math. Acad. Sci. Hungar.",
   ```

   typesets correctly.

2. You can type a single hyphen for a page range instead of the usual `--` in the `pages` field (see Section 5.4.2). So

   ```
   pages = "455-460",
   ```

   typesets correctly with an en dash.

3. You do not have to type nonbreakable spaces with `~` in the `author` or `editor` fields (see Section 5.4.3):

   ```
   author = "George A. Menuhin",
   ```

   is correct. Normally you would type `George~A. Menuhin`.

Finally, we state a rule about accented characters.

Rule ■ Accents
Put accented characters in braces: `{\"{a}}`.

This rule means that

```
author = "Paul Erd\H{o}s",
```

is not recommended. Instead, type

```
author = "Paul Erd{\H{o}}s",
```

This rule is, again, about portability. Some styles, e.g., `alpha` and `amsalpha`, create a citation for an article from the first three letters of the name and the last two digits of the year.

```
author = "Kurt G{\"{o}}del",
year = 1931,
```

creates the citation: [Göd31]. The accent is used only if the accents rule has been followed.

The downside of this rule is that the braces suppress kerning.

16.1.3 Articles

Entry type	`ARTICLE`
Required fields	`author`, `title`, `journal`, `year`, `pages`
Optional fields	`volume`, `number`, `language`, `note`

Examples:

1. Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.
2. Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), no. 5, 455–460 (English), Russian translation available.

typed as

```
@ARTICLE{eM57,
   author = "Ernest T. Moynahan",
   title = "On a Problem of {M. Stone}",
   journal = "Acta Math. Acad. Sci. Hungar.",
   pages = "455-460",
   volume = 8,
   year = 1957,
   }

@ARTICLE{eM57a,
   author = "Ernest T. Moynahan",
   title = "On a Problem of {M. Stone}",
   journal = "Acta Math. Acad. Sci. Hungar.",
   pages = "455-460",
```

```
   volume = 8,
   number = 5,
   year = 1957,
   note = "Russian translation available",
   language = "English",
   }
```

16.1.4 Books

Entry type	`BOOK`
Required fields	`author` (or `editor`), `title`, `publisher`, `year`
Optional fields	`edition`, `series`, `volume`, `number`, `address`, `month`, `language`, `note`

Examples:

1. George A. Menuhin, *Universal algebra*, D. Van Nostrand, Princeton, 1968.
2. George A. Menuhin, *Universal algebra*, second ed., University Series in Higher Mathematics, vol. 58, D. Van Nostrand, Princeton, March 1968 (English), no Russian translation.

typed as

```
@BOOK{gM68,
   author = "George A. Menuhin",
   title = "Universal Algebra",
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   year = 1968,
   }

@BOOK{gM68a,
   author = "George A. Menuhin",
   title = "Universal Algebra",
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   year = 1968,
   month = mar,
   series = "University Series in Higher Mathematics",
   volume = 58,
   edition = "Second",
   note = "no Russian translation",
   language = "English",
   }
```

Abbreviations, such as `mar`, are discussed in Section 16.1.9.

A second variant of book has an `editor` instead of an `author`:

15. Robert S. Prescott (ed.), *Universal algebra*, D. Van Nostrand, Princeton, 1968.

typed as

```
@BOOK{rP68,
   editor = "Robert S. Prescott",
   title = "Universal Algebra",
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   year = 1968,
   }
```

16.1.5 Conference proceedings and collections

Entry type	`INPROCEEDINGS`
Required fields	`author`, `title`, `booktitle`, `year`
Optional fields	`address`, `editor`, `series`, `volume`, `number`, `organization`, `publisher`, `month`, `note`, `pages`, `language`

Examples:

7. Peter A. Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra, 1970.
8. Peter A. Konig, *Composition of functions*. Proceedings of the Conference on Universal Algebra (Kingston, ON) (G. H. Birnbaum, ed.), vol. 7, Canadian Mathematical Society, Queen's Univ., December 1970, available from the Montreal office, pp. 1–106 (English).

typed as

```
@INPROCEEDINGS{pK69,
   author = "Peter A. Konig",
   title = "Composition of Functions".
   booktitle = "Proceedings of the Conference on
      Universal Algebra",
   year = 1970,
   }
```

```
@INPROCEEDINGS{pK69a,
   author = "Peter A. Konig",
   title = "Composition of Functions".
   booktitle = "Proceedings of the Conference on
      Universal Algebra",
   address = "Kingston, ON",
   publisher = "Queen's Univ.",
   organization = "Canadian Mathematical Society",
   editor = "G. H. Birnbaum",
   pages = "1-106",
   volume = 7,
   year = 1970,
   month = dec,
   note = "available from the Montreal office",
   language = "English",
   }
```

The `address` field provides the location of the meeting. The address of the publisher should be in the `publisher` field and the address of the organization in the `organization` field.

Entry type	`INCOLLECTION`
Required fields	`author`, `title`, `booktitle`, `publisher`, `year`
Optional fields	`editor`, `series`, `volume`, `number`, `address`, `edition`, `month`, `note`, `pages`, `language`

Examples:

1. Henry H. Albert, *Free torsoids*, Current Trends in Lattices, D. Van Nostrand, 1970.
2. Henry H. Albert, *Free torsoids*, Current Trends in Lattices (George Burns, ed.), vol. 2, D. Van Nostrand, Princeton, January 1970, new edition is due next year, pp. 173–215 (German).

is typed as

```
@INCOLLECTION{hA70,
   author = "Henry H. Albert",
   title = "Free Torsoids",
   booktitle = "Current Trends in Lattices".
   publisher = "D.~Van Nostrand",
   year = 1970,
   }
```

```
@INCOLLECTION{hA70a,
   author = "Henry H. Albert",
   editor = "George Burns",
   title = "Free Torsoids",
   booktitle = "Current Trends in Lattices".
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   pages = "173-215",
   volume = 2,
   year = 1970,
   month = jan,
   note = "new edition is due next year",
   language = "German",
   }
```

The address field contains the address of the publisher.

Cross-referencing

If your database has several articles from the same conference proceedings and collections, you may prefer to make an entry for the entire volume, and cross-reference individual articles to that entry. For instance,

```
@PROCEEDINGS{UA69,
   title = "Proceedings of the Conference on,
      Universal Algebra",
   booktitle = "Proceedings of the Conference on
      Universal Algebra",
   address = "Kingston, ON",
   publisher = "Canadian Mathematical Society",
   editor = "G. H. Birnbaum",
   volume = 7,
   year = 1970,
   }
```

may be the entry for the proceedings volume as a whole, and

```
@INPROCEEDINGS{pK69a,
   author = "Peter A. Konig",
   title = "Composition of Functions",
   booktitle = "Proceedings of the Conference on
      Universal Algebra",
   pages = "1-106",
   crossref = "UA69",
   }
```

is the cross-referencing entry for a specific article. These two entries produce the following:

1. G. H. Birnbaum (ed.), *Proceedings of the conference on universal algebra*, vol. 7, Kingston, ON, Canadian Mathematical Society, 1970.
2. Peter A. Konig, *Composition of functions*, in Birnbaum [1], pp. 1–106.

Rule ■ Cross-references

1. All the required fields of the cross-referencing entry must appear in either that entry or in the cross-referenced entry.
2. The cross-referenced entry should have both a `title` and a `booktitle` field.
3. The cross-referenced entry must appear in the `bib` file later than any entry that cross-references it.

16.1.6 Theses

Entry type `MASTERSTHESIS` or `PHDTHESIS`
Required fields `author`, `title`, `school`, `year`
Optional fields `type`, `address`, `month`, `note`, `pages`
Examples:

1. Soo-Key Foo, *Lattice constructions*, Ph.D. thesis, University of Winnebago, 1990.
2. Soo-Key Foo, *Lattice constructions*, Ph.D. dissertation, University of Winnebago, Winnebago, MN, December 1990, final revision not yet available, pp. 1–126.

is typed as

```
@PHDTHESIS{sF90,
   author = "Soo-Key Foo",
   title = "Lattice Constructions",
   school = "University of Winnebago",
   year = 1990,
   }
```

```
@PHDTHESIS{sF90a,
   author = "Soo-Key Foo",
   title = "Lattice Constructions",
   school = "University of Winnebago",
   address = "Winnebago, MN",
   year = 1990,
   month = dec,
   note = "final revision not yet available",
   type = "Ph.D. dissertation",
   pages = "1-126",
   }
```

If the type field is present, its content takes the place of the phrase Ph.D. thesis (or Master's thesis).

16.1.7 Technical reports

Entry type	TECHREPORT
Required fields	author, title, institution, year
Optional fields	type, number, address, month, note

Examples:

1. Grant H. Foster, *Computational complexity in lattice theory*, tech. report, Carnegie Mellon University, 1986.
2. Grant H. Foster, *Computational complexity in lattice theory*, Research Note 128A, Carnegie Mellon University, Pittsburgh, PA, December 1986, in preparation.

is typed as

```
@TECHREPORT{gF86,
   author = "Grant H. Foster",
   title = "Computational Complexity in Lattice Theory",
   institution = "Carnegie Mellon University",
   year = 1986,
   }

@TECHREPORT{gF86a,
   author = "Grant H. Foster",
   title = "Computational Complexity in Lattice Theory",
   institution = "Carnegie Mellon University",
   year = 1986,
```

```
   month = dec,
   type = "Research Note",
   address = "Pittsburgh, PA",
   number = "128A",
   note = "in preparation",
   }
```

16.1.8 Manuscripts and other entry types

Entry type UNPUBLISHED
Required fields author, title, note
Optional fields month, year

Examples:

1. William A. Landau, *Representations of complete lattices*, manuscript, 55 pages.
2. William A. Landau, *Representations of complete lattices*, manuscript, 55 pages, December 1975.

is typed as

```
@UNPUBLISHED{wL75,
   author = "William A. Landau",
   title = "Representations of Complete Lattices",
   note = "manuscript, 55~pages",
   }

@UNPUBLISHED{wL75a,
   author = "William A. Landau",
   title = "Representations of Complete Lattices",
   year = 1975,
   month = dec,
   note = "manuscript, 55~pages",
   }
```

Other standard entry types include

Entry type BOOKLET
Required field title
Optional fields author, howpublished, address, month, year, note

Entry type INBOOK
Required fields author or editor, title, chapter or pages, publisher, year
Optional fields series, volume, number, type, address, edition, month, pages, language, note

Entry type MANUAL
Required field title
Optional fields author, organization, address, edition, month, year, note

Entry type MISC
Required field at least one of the optional fields must be present
Optional fields author, title, howpublished, month, year, note, pages

Entry type PROCEEDINGS
Required fields title, year
Optional fields editor, series, volume, number, address, organization, publisher, month, note

16.1.9 Abbreviations

You may have noticed the field `month = dec` in some of the examples. This field uses an abbreviation. Most BIBTEX styles, including the AMS styles, include abbreviations for the months of the year: `jan`, `feb`, ..., `dec`. When an abbreviation is used, it is not enclosed in quotes (`"`) or braces (`{ }`). The style defines what is actually to be typeset. Most styles typeset `dec` as either Dec. or December.

The name of the abbreviation, such as `dec`, is a string of characters that starts with a letter, does not contain a space, an equal sign (`=`), a comma, or any of the special characters listed in Section 5.4.4.

You may define your own abbreviations using the command `@STRING`. For example,

```
@STRING{au = "Algebra Universalis"}
```

A string definition can be placed anywhere in a `bib` file, as long as it precedes the first use of the abbreviation in an entry.

The AMS supplies the `mrabbrev.bib` file containing the standard abbreviations for many mathematical journals. Find it at `ams.org`, under `Reference Tools`, click on `MR Serials Abbreviations for BibTeX`. Based on this file, you can make your own `abbrev.bib` file containing entries for all the journals you reference with whatever abbreviations you find easiest to remember. You should pare down the file, `mrabbrev.bib`, because it is too large for some systems to handle.

If you use this scheme, the command you use to specify the bib files may look like

```
\bibliography{abbrev,... }
```

Section 16.2.1 explains the \bibliography command.

16.2 Using BIBTEX

In Section 16.1, you learned how to create database files. The sample bib files are template.bib and sampartb.bib in the samples folder (see page 4). In this section, you learn how to use BIBTEX to process these files to create a bibliography. We illustrate the process of working with BIBTEX with the sampartb sample article.

We use the amsplain style. To obtain all six examples of different styles shown on pages 422–423, just change amsplain to the appropriate style name in your document and typeset it.

One BIBTEX style behaves differently. The apacite style of the American Psychological Association requires that the preamble of your document include the line

```
\usepackage{apalike}
```

in addition to using the style file. The package can also be modified by a large number of options.

16.2.1 Sample files

Type the following two lines to replace the thebibliography environment in the sampart.tex sample document:

```
\bibliographystyle{amsplain}
\bibliography{sampartb}
```

Save the new sample article as sampartb.tex. The first line specifies the bst file, amsplain.bst, which is part of the AMS distribution (see Section 11.6). The second line specifies the database files used. In this case there is only one, sampartb.bib.

The contents of the sampartb.bib bibliographic database file are as follows:

```
@BOOK{gM68,
   author = "George A. Menuhin",
   title = "Universal Algebra",
   publisher = "D.~Van Nostrand",
   address = "Princeton",
   year = 1968,
   }
```

```
@BOOK{fR82,
   author = "Ferenc R. Richardson",
   title = "General Lattice Theory",
   edition = "Expanded and Revised",
   language = "Russian",
   publisher = "Mir",
   address = "Moscow",
   year = 1982,
   }


@ARTICLE{eM57,
   author = "Ernest T. Moynahan",
   title = "On a Problem of {M. Stone}",
   journal = "Acta Math. Acad. Sci. Hungar.",
   pages = "455-460",
   volume = 8,
   year = 1957,
   }


@ARTICLE{eM57a,
   author = "Ernest T. Moynahan",
   title = "Ideals and Congruence Relations in
      Lattices.~\textup{II}",
   journal = "Magyar Tud. Akad. Mat. Fiz. Oszt. K{\"{o}}zl.",
   language = "Hungarian",
   pages = "417-434",
   volume = 7,
   year = 1957,
   }


@PHDTHESIS{sF90,
   author = "Soo-Key Foo",
   title = "Lattice Constructions",
   school = "University of Winnebago",
   address = "Winnebago, MN",
   year = 1990,
   month = dec,
   }
```

Type `sampartb.bib` or copy it from the `samples` folder to your `work` folder.

16.2.2 Setup

Before you start BibTeX, make sure that everything is set up properly as described in this section.

To list database entries in the bibliography, use the `\cite` command. Refer to Section 10.5.1 for details on how to use citations. If you want to have a reference listed in the bibliography without a citation in the text, then use the `\nocite` command. For example,

```
\cite{pK57}
```

includes the reference in the bibliography and cites the entry with label `pK57`, whereas

```
\nocite{pK57}
```

includes the reference in the bibliography but does not cite the entry. In either case, one of the `bib` files specified in the argument of the `\bibliography` command must contain an entry with the label `pK57`. The `\nocite{*}` command includes *all* the entries from the bibliographic databases you've specified.

Your document must specify the bibliography style and must name the `bib` files to be used. For instance, the `sampartb.tex` sample article contains the lines

```
\bibliographystyle{amsplain}
\bibliography{sampartb}
```

The `\bibliographystyle` command specifies `amsplain.bst` as the style and the `\bibliography` command specifies the database file `sampartb.bib`. To use several database files, separate them with commas, as in

```
\bibliography{abbrev,gg,lattice,sampartb}
```

where

- `abbrev.bib` contains user-defined abbreviations
- `gg.bib` contains personal articles
- `lattice.bib` contains lattice theory articles by other authors
- `sampartb.bib` contains additional references needed for `sampartb.tex`

It is important to make sure that the `bst` file, the `bib` file(s), and the LaTeX document(s) are in folders where BibTeX can find them. If you are just starting out, you can simply copy all of them into one folder. Later, you may want to look for a more permanent solution by keeping the files `abbrev.bib` and `lattice.bib` in one "central" location, while placing `sampartb.bib` in the same folder as its corresponding LaTeX document.

16.2.3 Four steps of BIBTEXing

The following steps produce a typeset bibliography in your LATEX document. We use the `sampartb.tex` sample article as an example.

Step 1 Check that BIBTEX, your LATEX document, and the `bib` files are placed in the appropriate folders.

Step 2 Typeset `sampartb.tex` to get a fresh `aux` file. This step is illustrated in Figure 16.1.

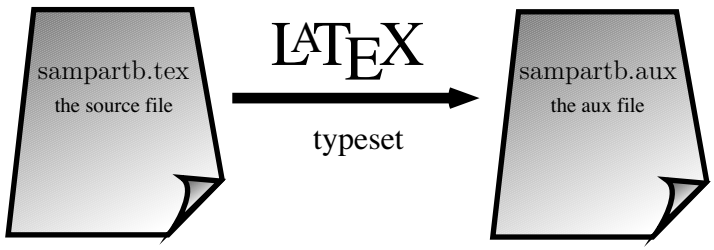

Figure 16.1: Using BIBTEX, step 2.

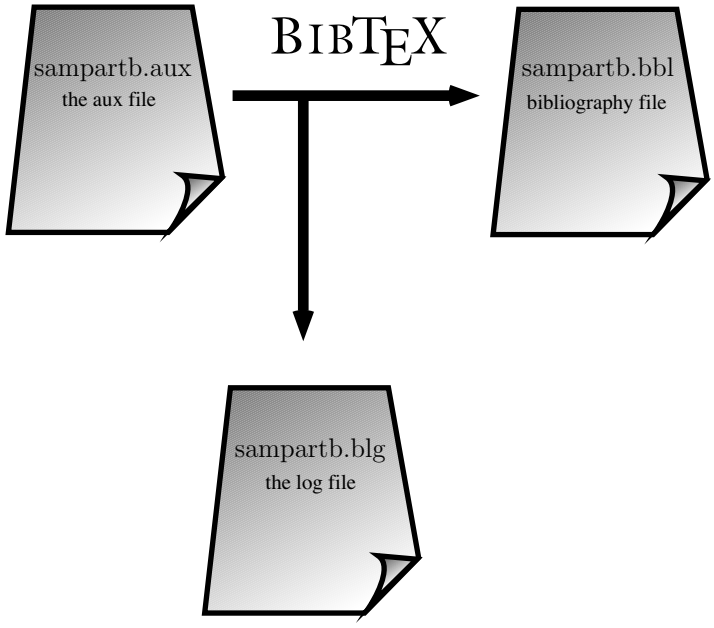

Figure 16.2: Using BIBTEX, step 3.

Step 3 Run BibTeX on the `sampartb.aux` file in one of the following three ways:

- by invoking it with the argument `sampartb`
- by starting the application and then opening `sampartb.aux`
- by running it by choosing it as a menu option of your editor or GUI front end or by clicking on an icon

If BibTeX cannot find a crucial file, for example, the `bst` file, it stops. The reason it stopped is shown in the `log` window and also written to a `blg` (bibliography log) file, `sampartb.blg`. Correct the error(s) and go back to step 2. A successful run creates a `bbl` (bibliography) file, `sampartb.bbl`, in addition to `sampartb.blg`. This step is illustrated in Figure 16.2.

Step 4 Typeset the LaTeX document `sampartb.tex` *twice*.

BibTeX uses and creates a number of files when it is run. To illustrate this process, complete the four steps using `sampartb.tex`.

Step 1 Start fresh by deleting the `aux`, `blg`, and `bbl` files, if they are present.

Step 2 Typeset the article `sampartb.tex` to get an `aux` file (see Figure 16.1). Notice that the `log` file contains warnings about missing references and a number of other lines not relevant to the current discussion. The lines in the `aux` file containing bibliographic information are

```
\citation{fR82}
\citation{gM68}
\citation{eM57}
\citation{sF90}
\citation{eM57a}
\bibstyle{amsplain}
\bibdata{sampartb}
```

Each `\citation` command in this file corresponds to a `\cite` or `\nocite` command in the article. The lines

```
\bibliographystyle{amsplain}
\bibliography{sampartb}
```

in `sampartb.tex` are written as

```
\bibstyle{amsplain}
\bibdata{sampartb}
```

in the `sampartb.aux` file.

Step 3 Now run BIBTEX on the `sampartb.aux` file (see Figure 16.2). How we do this, depends on the LATEX installation you have. In UNIX installations, you type

```
bibtex intrarti
```

at the command line. In newer user interfaces, BIBTEX is represented by an icon, and you drop `intrarti.aux` into it. In modern installations, your editor also runs BIBTEX. In `WinEdt` (see Section A.1.2), run BIBTEX by clicking on the BIBTEX button. In `TeXShop` (see Section A.2.1), change the `LaTeX` button to `BibTeX` and click on the `Typeset` button. Now change the `BibTeX` button back to `LaTeX`. Click on the `Typeset` button, and you have the typeset article with the bibliography.

BIBTEX generates two new files: `sampartb.blg` and `sampartb.bbl`. Look at `sampartb.blg`:

```
This is BibTeX, C Version 0.99c
The top-level auxiliary file: sampartb.aux
The style: amsplain.bst
Database file #1: sampartb.bib
```

On some systems, this file may be much longer than the one I show here. At present, this `blg` file does not contain much important information. If there were any warnings or errors, they would be listed in this file.

The `sampartb.bbl` file, in which BIBTEX created a `thebibliography` environment (see Section 10.5.1) is more interesting:

```
\providecommand{\bysame}{\leavevmode%
\hbox to3em {\hrulefill}\thinspace}
\begin{thebibliography}{1}

\bibitem{sF90}
Soo-Key Foo, \emph{Lattice constructions},
Ph.D. thesis, University of Winnebago,
Winnebago, MN, December 1990.

\bibitem{gM68}
George~A. Menuhin, \emph{Universal algebra},
D.~Van Nostrand, Princeton, 1968.

\bibitem{eM57a}
Ernest~T. Moynahan, \emph{Ideals and congruence
relations in lattices.~\textup{II}},
Magyar Tud. Akad. Mat. Fiz. Oszt. K{\"{o}}zl.
\textbf{7} (1957), 417-434 (Hungarian).
```

```
\bibitem{eM57}
\bysame, \emph{On a problem of {M. Stone}}, Acta
Math. Acad. Sci. Hungar. \textbf{8} (1957),
455-460.

\bibitem{fR82}
Ferenc~R. Richardson, \emph{General lattice theory},
expanded and revised ed., Mir, Moscow,
1982 (Russian).

\end{thebibliography}
```

Observe that the nonbreakable spaces (ties) and the `\bysame` command have been provided in the author fields.

Step 4 Now typeset `sampartb.tex` again. The typeset version now has a REFERENCES section, constructed from the `bbl` file, but the new `log` file has warnings about missing entries. The new `aux` file contains five interesting new lines:

```
\bibcite{sF90}{1}
\bibcite{gM68}{2}
\bibcite{eM57a}{3}
\bibcite{eM57}{4}
\bibcite{fR82}{5}
```

These lines identify the cross-reference label `sF90` (see the first line shown—the symbol designates Foo's thesis in `sampartb.bib`) with the number `1`, and so on. Now typeset `sampartb.tex` again, and all the citations are correctly placed in the typeset article.

Observe:

1. The crucial step 3, running the BibTeX application, gives different error messages and obeys different rules from LaTeX—see Section 16.2.4.
2. The `sampartb.bbl` file was created by BibTeX. It is not changed by running LaTeX.

16.2.4 BibTeX rules and messages

Rule ■ BibTeX and %
You cannot comment out a field with an %.

For example, the entry

```
@ARTICLE{eM57,
   author = "Ernest T. Moynahan",
   title = "On a Problem of {M. Stone}",
   journal = "Acta Math. Acad. Sci. Hungar.",
   % pages = "455-460",
   volume = 8,
   year = 1957,
   }
```

causes BIBTEX to generate the error message

```
You're missing a field name
                 line 23 of file sampartb.bib
 :
 :    % pages = "455-460",
(Error may have been on previous line)
I'm skipping whatever remains of this entry
Warning--missing year in eM57
Warning--missing pages in eM57
(There was 1 error message)
```

Recall that BIBTEX ignores field names it cannot recognize. So changing the field name `pages`, for example to `pages-comment`, does not give an error message. However, doing so removes a required field, so you get the warning message

```
Warning--missing pages in eM57
```

Rule ■ BIBTEX field names
Do not abbreviate field names.

For instance, if you abbreviate `volume` to `vol`, as in

```
@ARTICLE{eM57,
   author = "Ernest T. Moynahan",
   title = "On a Problem of {M. Stone}",
   journal = "Acta Math. Acad. Sci. Hungar.",
   pages = "455-460",
   vol = 8,
   year = 1957,
   }
```

the `vol` field is simply ignored. This entry is typeset as

3. Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. (1957), 455–460.

instead of

3. Ernest T. Moynahan, *On a problem of M. Stone*, Acta Math. Acad. Sci. Hungar. **8** (1957), 455–460.

Rule ■ BibTeX field terminations

Make sure that every field of an entry, except possibly the last, is terminated with a comma.

If you drop a comma before a field, you get an error message such as

```
I was expecting a ‘,’ or a ‘)’
               line 6 of file sampartb.bib
 :
 :    year = 1968,
(Error may have been on previous line)
I’m skipping whatever remains of this entry
Warning--missing year in gM68
```

Rule ■ BibTeX field value terminations

Make sure that the field value is properly terminated.

You should be careful not to drop a double quote or brace. If you drop the closing quote on line 11 of the `bib` file,

```
title = "General Lattice Theory
```

you get the error message

```
I was expecting a ‘,’ or a ‘}’
                  line 12 of file sampartb.bib
 :    edition = "
 :               Expanded and Revised",
I’m skipping whatever remains of this entry
Warning--missing publisher in fR82
Warning--missing year in fR82
```

If, instead, you drop the opening double quote in the same line, you get the error message

```
Warning--string name "general" is undefined
--line 11 of file sampartb.bib
I was expecting a ‘,’ or a ‘}’
                  line 11 of file sampartb.bib
 :    title =  general
 :                     Lattice Theory",
I’m skipping whatever remains of this entry
Warning--missing title in fR82
Warning--missing publisher in fR82
Warning--missing year in fR82
(There was 1 error message)
```

BIBTEX assumed that `general` was an abbreviation, since it was not preceded by a `"`.

The obvious conclusion is that you have to be very careful about typing your bibliographic entries for BIBTEX. If you have access to special tools for maintaining your bibliographic data, use them. Otherwise, refer to the `template.bib` file that contains templates of often-used entry types.

16.2.5 Submitting an article

If you submit an article to a journal that provides you with a BIBTEX style file, then you can submit the article and the BIBTEX database file, pared down of course. If this is not the case, create the `bbl` file with `amsplain.bst` and copy and paste the content into the `thebibliography` environment in the article. Then the journal's editor can edit the bibliography.

16.3 Concluding comments

There is a lot more to BIBTEX than what has been covered in this chapter. For example, BIBTEX's algorithm to alphabetize names is fairly complicated. Some names create additional difficulties. Where should John von Neumann be placed, under the "v"-s or the "N"-s? It depends on the style. How do we handle names where the first word is the family name, as in Ho Chi Minh or Grätzer György? Again, it depends on the style.

Oren Patashnik's *BIBTEXing* [52] has many helpful hints. It includes a clever hack to order entries correctly even when the style does not do so. Chapter 13 of *The LATEX Companion,* 2nd edition [46] has a long discussion of BIBTEX. It also contains a long list of styles.

There are many tools to make BIBTEXing easier. *BibDesk* for the Mac is an excellent graphical BIBTEX-bibliography manager. For Windows, there is *BibTexMng*. For UNIX, there is *pybibliographer* and if you are an Emacs user, there is *Ebib*. Written in

Java, so available on most platforms, is *JBibtexManager*.

There are many BIBTEX databases. The largest one may be "The Collection of Computer Science Bibliographies" with more than two million references.

You can easily build your own mathematical databases with MathSciNet from the AMS. Do a search. When the result page comes up, go to the pull down menu next to `Batch Download` and select `Citations (BibTeX)`. Now you can check mark the items you want by clicking on the little squares and then click on `Retrieve Marked` next to the pull down menu or click on `Retrieve First 50`. For the latter to work well, before your search, click on the `Preferences` button and click on the circle next to 50, so you get at most 50 items per result page. Then `Retrieve First 50` retrieves them all.

Finally, after many years of development, the AMS released `amsrefs`, the kid brother of BIBTEX, at its annual meeting in January 2002. The presentation was made by Michael Downes, who designed and coded the package. I was very excited to hear his lecture—bibliographic management was the last block needed to complete the rebuilding of LATEX. It turned out that `amsrefs` is not simply a BIBTEX replacement. It has a number of very important new features.

1. You can, with `amsrefs`, enter the marked up bibliographic entries into the document. This means that the document class of the journal publishing the paper can format your bibliography.

2. `amsrefs` is a LATEX package. Therefore, you do not have to learn (another) esoteric language to control the formatting of your bibliography. Developing a format for a journal is very easy.

3. The bibliographic data files are also LATEX files, so you can print them within LATEX, making it easy to maintain them.

After Michael Downes passed away, David Jones took over the project, and released version 2.0 in June of 2004.

Unfortunately, unlike the BIBTEX and its `bbl` file, `amsrefs` directly creates the typeset file. So if the journal you want to submit your article to does not have an `amsrefs` style file—and today only the AMS journals have them—then you have to manually convert the `amsrefs` entries into the format the journal would accept. There is no option to set in `amsrefs` to produce a LATEX source file for the bibliographic entries. Therefore, unless you know that you intend to submit to an AMS journal—and you know that it will accept your article for publication—you should not use `amsrefs`.

There is a second obstacle. There is no BibDesk or BibTexMng for `amsrefs`. But I believe that if `amsrefs` overcomes the first obstacle, then the second obstacle would resolve itself fast.

There is a new development which shares some of Michael Downes' goals. It is Philipp Lehman's `biblatex` package, now in version 0.6. It works with (some) BIBTEX databases and uses LATEX to format the bibliography.

CHAPTER

17

MakeIndex

Pehong Chen's *MakeIndex* application, described in Pehong Chen and Michael A. Harrison's *Index preparation and processing* [10], helps LaTeX users create long indexes. For short indexes, you can easily do without it (see Section 10.5.2).

In Section 17.1, we show you by an example how to prepare an article for indexing. We introduce formally the index commands in Section 17.2. In Section 17.3, we describe how LaTeX and *MakeIndex* process the index entries. The rules are stated in Section 17.4.

Multiple indexes are almost as easy as single indexes. They are described in Section 17.5. We conclude with glossaries in Section 17.6.

Indexing is a difficult task. For an extensive discussion on how to create a useful index, consult *The Chicago Manual of Style,* 15th edition [11].

17.1 Preparing the document

LaTeX provides the `theindex` environment (see Section 10.5.2). Within this environment, it provides the `\item`, `\subitem`, and `\subsubitem` commands to typeset entries, subentries, and subsubentries, respectively, and the `\indexspace` command for adding vertical space between alphabetical blocks, see Figure 17.1 for an example.

The makeidx package provides the \index command for specifying the index entry at a particular point in the document, which becomes a page reference for the entry in the typeset index.

Making an index entry with *MakeIndex* is easy. You simply place the index commands in your source file, and then let LaTeX and *MakeIndex* do the work of gathering the entries and the page numbers for the entries, sorting them, and formatting the typeset index.

There are three steps:

1. In the preamble of your LaTeX document, include the line

   ```
   \makeindex
   ```

   If you do not use an AMS document class, include the two lines

   ```
   \usepackage{makeidx}
   \makeindex
   ```

2. Type the line

   ```
   \printindex
   ```

   at the point in your document where you want the index to appear, usually as part of the back matter (see Section 10.5).

3. Mark all entries in your document with \index commands.

We illustrate this procedure with the intrarti.tex article, which modifies the article intrart.tex by inserting a number of index entries (both intrart.tex and intrarti.tex are in the samples folder; see page 4).

We now add a dozen \index commands to intrart.tex.

Command 1

Retype the line

```
\begin{theorem}
```

to read

```
\begin{theorem}\index{Main Theorem}
```

Commands 2 and 3

Type the commands

```
\index{pistar@$\Pi^{*}$ construction}%
\index{Main Theorem!exposition|(}%
```

after the line

```
\section{The $\Pi^{*}$ construction}\label{S:P*}
```

Command 4

Retype the line

```
See also Ernest~T. Moynahan~\cite{eM57a}.
```

as follows:

```
See also Ernest~T.
\index{Moynahan, Ernest~T.}%
Moynahan~\cite{eM57a}.
```

Commands 5 to 7

Type the three index items

```
\index{lattice|textbf}%
\index{lattice!distributive}%
\index{lattice!distributive!complete}%
```

before the line

```
\begin{theorem}\label{T:P*}
```

Command 8

Type

```
\index{Main Theorem!exposition|)}
```

after the line

```
hence $\Theta = \iota$.
```

Command 9

Retype the line

```
\bibitem{sF90}
```

as follows:

```
\bibitem{sF90}\index{Foo, Soo-Key}%
```

Command 10

Retype the line

```
\bibitem{gM68}
```

as follows:

```
\bibitem{gM68}\index{Menuhin, George~A.}%
```

Command 11

Retype the line

```
\bibitem{eM57}
```

as follows:

```
\bibitem{eM57}\index{Moynahan, Ernest~T.}%
```

Command 12

Retype the line

```
\bibitem{eM57a}
```

as follows:

```
\bibitem{eM57a}\index{Moynahan, Ernest~T.}%
```

These `\index` commands produce the index for the `intrarti.tex` article shown in Figure 17.1. Notice that although you typed 12 index commands, only 11 entries appear in the index. The last two entries for Moynahan (commands 11 and 12) occur on the same typeset page, so only one page number shows up in the index.

INDEX

Foo, Soo-Key, 2

lattice, **1**
  distributive, 1
    complete, 1

Main Theorem, 1
  exposition, 1–2
Menuhin, George A., 2
Moynahan, Ernest T., 1, 2

Π^* construction, 1

Figure 17.1: A simple index.

The `showidx` package (see Section 12.3) lists all the index items of a page in a top corner on the margin. The top of the first page of the typeset `intrarti.tex` is shown in Figure 17.2.

A CONSTRUCTION OF COMPLETE-SIMPLE DISTRIBUTIVE LATTICES

GEORGE A. MENUHIN

ABSTRACT. In this note, we prove that there exist *complete-simple distributive lattices,* that is, complete distributive lattices with only two complete congruences.

Main Theorem
pistar@$"Pi^*$
construction
Main
Theorem!exposition—(
Moynahan, Ernest^T.
lattice—textbf
lattice!distributive
lattice!distributive!complete

Figure 17.2: Using `showidx`.

17.2 Index commands

There are a few major forms of `\index` commands. They are discussed in this section, illustrated by the commands shown in Section 17.1.

Simple \index ***commands***

The index entry

Foo, Soo-Key, 2

was created by command 9,

```
\index{Foo, Soo-Key}
```

This entry is an example of the simplest form of an index command:

```
\index{entry}
```

The entry

lattice, **2**

was created as command 5,

```
\index{lattice|textbf}
```

Ignore, for the time being, the `|textbf` part. This entry has a subentry,

lattice, **2**
distributive, 2

which was created by command 6,

```
\index{lattice!distributive}
```

There is also a subsubentry,

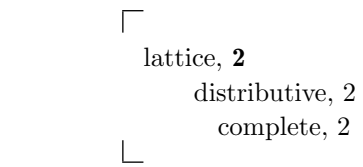

which was created by command 7,

```
\index{lattice!distributive!complete}
```

The form of the `\index` command for subentries is

\index{*entry*!*subentry*}

and for subsubentries it is

\index{*entry*!*subentry*!*subsubentry*}

Modifiers

Command 5

```
\index{lattice|textbf}
```

produces a bold page number in the entry lattice.

The command whose name follows the symbol | (in this case, the command name is `textbf`) is applied to the page number. For instance, if you want a large bold page number, then define the command `\LargeBold` as

```
\newcommand{\LargeBoldB}[1]{\textbf{\Large #1}}
```

and type the `\index` command as

\index{*entry*|LargeBold}

You can also modify `\index` commands to indicate *page ranges:*



The latter index entry has a page range. It was created with commands 3 and 8:

```
\index{Main Theorem!exposition|(}
\index{Main Theorem!exposition|)}
```

Separate an entry from its modifier with `|`, open the page range with `(`, and close it with `)`.

Modifiers can also be combined. The index commands

```
\index{Main Theorem!exposition|(textbf}
\index{Main Theorem!exposition|)textbf}
```

produce a bold page range.

Sorting control

Observe the `\index` command

```
\index{pistar@$\Pi^{*}$ construction}
```

This produces the entry

Π* construction, 1

To place this entry in the correct place in the index, use a *sort key.* The general form of an `\index` command with a sort key is

`\index{`*`sortkey`*`@`*`entry`*`}`

In this example, the sortkey is `pistar`. When the entries are sorted, the *`sortkey`* is used to sort the entry. A few typical examples follow:

Example 1 An `\index` command for G.I. Žitomirskiĭ,

```
\index{Zitomirskii@\v{Z}itomirski\u{\i}, G.I.}
```

sorts Žitomirskiĭ with the Z entries.

If you used the command

```
\index{\v{Z}itomirski\u{\i}, G.I.}
```

Žitomirskiĭ would be sorted with the v's.

Example 2 An `\index` command for the Őrmester lemma,

```
\index{Ormester@\H{O}rmester lemma}
```

would sort Őrmester lemma with the O entries.

If you used the command

```
\index{\H{O}rmester lemma}
```

Őrmester lemma would be sorted with the H's.

Example 3 An \index command for *truncated* lattice,

```
\index{truncated lattice@\emph{truncated} lattice}
```

sorts *truncated* lattice with the t entries.

If you use the command

```
\index{\emph{truncated} lattice}
```

this would sort *truncated* lattice with the e's.

Example 4 We want to place the symbol Truncat f, typed as `\Trunc f` (see Section 7.6.2) in the index, sorted as Trunc.

```
\index{$\Trunc f$}
```

would place Truncat f near the beginning of the index, sorted with the $ symbol. If you use the command

```
\index{Trunc@$\Trunc f$}
```

this would sort Truncat f with the T's.

Sorting control and subentries

If you want to place a subentry under an entry with a sort key, you must include the sort key part of the entry as well:

`\index{`*`sortkey`*`@`*`entry`*`!`*`subentry`*`}`

For instance,

```
\index{Zitomirskii@\v{Z}itomirski\u{\i}, G.I.!education}
```

You can also use a sort key for subentries (and subsubentries), such as

```
\index{lattice!weakly distributive@
        \emph{weakly} distributive}
```

or, a more complicated example,

```
\index{Zitomirskii@\v{Z}itomirski\u{\i}, G.I.!elementary
education@\textbf{elementary} education}
```

Special characters

Since the `!`, `@`, and `|` characters have special meanings within an `\index` command, you need to *quote* those characters if you want them to appear as themselves. *MakeIndex* uses the double quote character (`"`) for this purpose: `"!`, `"@`, and `"|`.

Because this usage makes the double quote a special character itself, it also has to be quoted if you need to use it in an `\index` command: `""`.

Example 1 To produce the entry Start here!, type the `\index` command as

```
\index{Start here"!}
```

Example 2 To produce the entry @ symbol, type the `\index` command as

```
\index{"@ symbol}
```

Example 3 To produce the entry $|A|$, type the `\index` command as

```
\index{"|A"|@$"|A"|$}
```

Cross-references

It is easy to make a cross-reference to another index entry. For instance, to list distributive lattice by cross-referencing it to lattice, distributive, the command is

```
\index{distributive lattice|seeonly{lattice,
                                    distributive}}
```

which produces the entry

distributive lattice, *see* lattice, distributive

For non-AMS document classes, `seeonly` should be `see`.

A command of this form can be placed anywhere in the document.

Tip Put all cross-referencing `\index` commands in one place in your document, so they are easy to keep track of.

Placement of `\index` *commands*

The principle is simple.

Rule ■ Placement of `\index` commands
An `\index` command should:

1. Reference the correct page
2. Not introduce unwanted space into the typeset document

For example, you should avoid placing `\index` commands as shown here:

```
Let $L$ be a distributive lattice
\index{lattice}
\index{distributive lattice}
that is strongly complete.
```

This placement may result in unwanted extra space following the word lattice:

Let L be a distributive lattice that is strongly complete.

Note the placement of the `\index` commands in Section 17.1. In each case I have placed them as close to the referenced item as I could. If you place an index entry on a separate line, use `%` to comment out unwanted spaces including the end-of-line character (see Section 5.5.1), as in

```
Let $L$ be a distributive lattice
\index{lattice}%
\index{distributive lattice}%
that is strongly complete.
```

Read also Section 18.5 on page breaks and index entries.

Listing the forms of the `\index` *command*

We have discussed the following forms:

```
\index{entry}
\index{entry!subentry}
\index{entry!subentry!subsubentry}
\index{entry|modifier}
\index{entry|open/close modifier}
\index{sortkey@entry}
```

```
\index{sortkey@entry!subentry}
\index{sortkey@entry!subsortkey@subentry}
```

Of course, more combinations are possible; the following may be the longest form:

```
\index{sortkey@entry!subsortkey@subentry%
!subsubsortkey@subsubentry|open/close modifier}
```

17.3 Processing the index entries

Once you are satisfied with the `\index` commands, the index is ready to be created.

Step 1 Typeset `intrarti.tex` (see Figure 17.3).

Step 2 Run the *MakeIndex* application on `intrarti.idx` (see Figure 17.4).

Step 3 Typeset `intrarti.tex` again.

You find the index on page 3 of the typeset document.

Let us look at this process in detail. In step 1 (see Figure 17.3), LaTeX creates the `intrarti.idx` file:

```
\indexentry{Main Theorem}{1}
\indexentry{pistar@$\Pi^{*}$ construction}{1}
\indexentry{Main Theorem!exposition|(}{1}
\indexentry{Moynahan, Ernest~T.}{1}
\indexentry{lattice|textbf}{1}
\indexentry{lattice!distributive}{1}
\indexentry{lattice!distributive!complete}{1}
\indexentry{Main Theorem!exposition|)}{2}
\indexentry{Foo, Soo-Key}{2}
\indexentry{Menuhin, George~A.}{2}
\indexentry{Moynahan, Ernest~T.}{2}
\indexentry{Moynahan, Ernest~T.}{2}
```

In step 2 (see Figure 17.4), *MakeIndex* processes `intrarti.idx` and creates the index file `intrarti.ind`, which contains a `theindex` environment with all the index entries:

```
\begin{theindex}

  \item Foo, Soo-Key, 2

  \indexspace
```

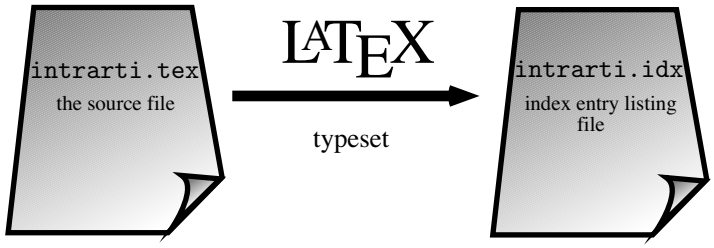

Figure 17.3: Using *MakeIndex,* step 1.

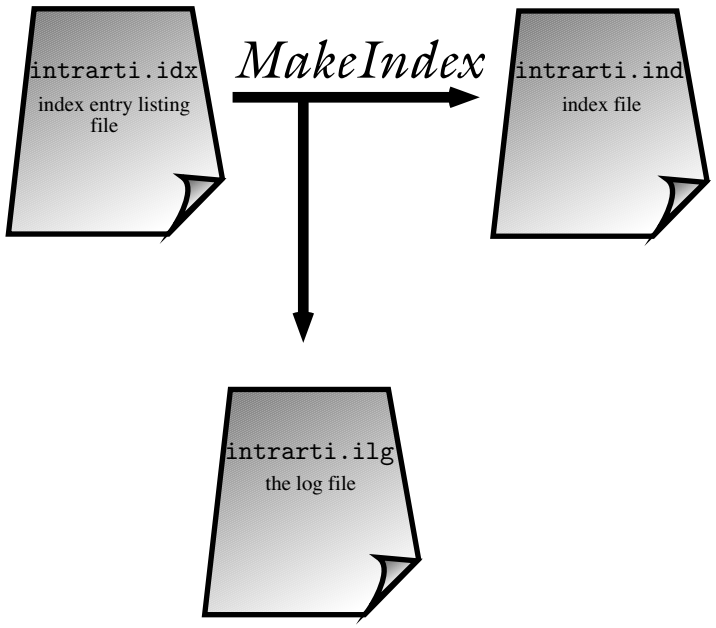

Figure 17.4: Using *MakeIndex,* step 2.

```
\item lattice, \textbf{1}
  \subitem distributive, 1
    \subsubitem complete, 1

\indexspace

\item Main Theorem, 1
  \subitem exposition, 1--2
\item Menuhin, George~A., 2
```

```
  \item Moynahan, Ernest~T., 1, 2

  \indexspace

  \item $\Pi^{*}$ construction, 1

\end{theindex}
```

The `\printindex` command reads `intrarti.ind` during the next typesetting cycle.

MakeIndex also produces the index `log` file `intrarti.ilg`:

```
This is makeindex, version 2.14 [02-Oct-2002]
(kpathsea + Thai support).
Scanning input file intrarti.idx....done
(12 entries accepted, 0 rejected).
Sorting entries....done (43 comparisons).
Generating output file intrarti.ind....done
(22 lines written, 0 warnings).
Output written in intrarti.ind.
Transcript written in intrarti.ilg.
```

It is important to understand that in step 1, LaTeX does not process the index entries, it simply writes the arguments of the `\index` commands in the source file to the `idx` file as arguments of `\indexentry` commands verbatim (that is, with no change). *MakeIndex* then processes the `idx` file by removing the double quote marks for the special characters, sorting the entries, and collating the page numbers. The resulting `ind` file is a normal LaTeX source file (you can edit it, if necessary) that is included in the original document by the `\printindex` command the next time you run LaTeX.

In Step 2, we run the *MakeIndex* application on `intrarti.idx`. How we do this depends on the LaTeX installation you have. In UNIX installations, you type

```
MakeIndex intrarti
```

at the command line. In newer user interfaces, *MakeIndex* is represented by an icon, and you drop `intrarti.idx` into it. In modern installations, your editor also runs *MakeIndex*. In `WinEdt` (see Section A.1.2), run *MakeIndex* by clicking on the *MakeIndex* button. In `TeXShop` (see Section A.2.1), change the `LaTeX` button to *MakeIndex* with `Typeset>MakeIndex` and click on the `Typeset` button. Now change the *MakeIndex* button back to `LaTeX` with `Typeset>LaTeX`. Click on the `Typeset` button, and you have the typeset article with the index.

17.4 Rules

There are some simple rules to keep in mind when entering index items.

Rule ■ **Spaces in** `\index`
Do not leave unnecessary spaces in the argument of an `\index` command.

`\index{item}`, `\index{␣item}`, and `\index{item␣}`

produces three different entries.

There are options that instruct *MakeIndex* to ignore such spaces, but you are better off typing the `\index` commands correctly in the first place.

Rule ■ **Spacing rules for** *MakeIndex*
LaTeX's text spacing rules (Section 5.2.1) do not apply. *MakeIndex* does not follow these rules when it sorts the index items. While LaTeX ignores spaces, *MakeIndex* does not.

Rule ■ **Sort keys**
In `\index{`*`sortkey`*`@`*`item`*`}`, the *`sortkey`* is both space and case sensitive.

For instance,

```
\index{alpha@$\alpha$}
\index{Alpha@$\alpha$}
\index{ALPHA@$\alpha$}
```

represent three different items.

Rule ■ **Braces**
In every entry, the braces must be balanced.

Normally, balancing braces is not a problem. The braces within a math formula or a TeX expression should always be balanced. However, the `\index` command that creates the entry for { with the sort key `leftbrace` cannot be typed as

```
\index{@\{}
```

because LaTeX would give the error message

```
Runaway argument?
{leftbrace@\{}
! Paragraph ended before \@wrindex was complete.
```

There are many ways to correct this `\index` command. Perhaps the simplest is to define

```
\newcommand{\printleftbrace}{\{}
```

and rewrite the `\index` command

```
\index{@\printleftbrace}
```

This produces the entry

{, 1

There is, of course, a lot more to *MakeIndex* than what we have discussed in this short introduction, but what we have covered here should do for most documents. See Pehong Chen and Michael A. Harrison's *Index preparation and processing* [10] for more detail. Chapter 12 of *The LaTeX Companion,* 2nd edition [46] covers *MakeIndex* in great detail, including the customization of indexes.

17.5 Multiple indexes

To split your index file into two parts, the first with all names and the second with the other entries, include the following three lines in the preamble:

```
\usepackage{amsmidx}
\makeindex{names}
\makeindex{others}
```

For the package `amsmidx`, see Section 11.6.

Now enter each index command in the form

```
\index{names}{}
```

or

```
\index{others}{}
```

So you would enter

```
\index{Moynahan, Ernest~T.}
```

as

```
\index{names}{Moynahan, Ernest~T.}
```

and

```
\index{Main Theorem}
```

as

```
\index{others}{Main Theorem}
```

Where you want the two indexes to appear in the typeset article, enter the commands

```
\Printindex{names}{Contributors}
\Printindex{others}{Index}
```

Of course, instead of `Contributors` and `Index` you may enter any titles for the two indexes.

17.6 Glossary

Using the glossary commands is very similar to using the corresponding index commands.

Instead of the `\index` and `\makeindex` commands, use the `\glossary` and `\makeglossary` commands, respectively. Glossary entries are written in the `glo` file, which corresponds to the `idx` file. LaTeX gives you no further assistance in making a glossary file. There is no `\printglossary` command, `theglossary` environment, or *MakeGlossary* application. There is, however, Thomas Henlich's `makeglos` package (see Section E.1).

17.7 Concluding comments

Style files are available in a very limited form also for *MakeIndex*. Google

```
makeindex style
```

for an up-to-date listing.

Indexing is a very complex process, so it is not surprising that there are many index packages available. CTAN lists a number of them in the `index` directory. The best known is `xindy`, described in detail in *The LaTeX Companion,* 2nd edition [46].

CHAPTER

18

Books in LaTeX

Since the introduction of LaTeX, the visual quality of articles published in mathematical journals has improved dramatically. Unfortunately, the same cannot be said of books published using LaTeX. A record number of very ugly books have appeared.

It is easy to understand why. While `amsart` has been designed to produce high-quality printed output, the standard book document classes do not produce attractive books without additional work.

LaTeX provides the `book` and the `amsbook` document classes to serve as foundations for well-designed books. Better quality books have to use document classes designed by professionals. We provide some sample pages from a book using Springer's `svmono.cls` document class. We briefly discuss logical and visual design in Section 4.3.2.

So this chapter is not about how to produce a finished book using LaTeX. Our goal is much more modest, how to prepare a book manuscript for your publisher. In Section 18.1 we describe the book document classes `book` and `amsbook`. The table of contents and lists of figures and tables are discussed in Section 18.2.

Typesetting a book involves dozens of files. Section 18.3.3 gives some tips on how to organize them. Section 18.4 covers logical design. Section 18.5 deals with the final preparation of your edited manuscript for your publisher. Finally, Section 18.6

suggests a few more things to do if you typeset your book yourself.

18.1 Book document classes

In this section, we briefly discuss the way in which `book` and `amsbook`, the two standard book document classes, differ from the corresponding article document classes. We also show a few pages from a book that was typeset with Springer Verlag's document class for monographs: `svmono.cls`.

18.1.1 Sectioning

Book document classes have chapters, invoked with the `\chapter` command and *parts,* invoked with `\part`. The `\part` command is generally used to group chapters in longer documents, for instance in this book. Parts have no effect on the numbering of chapters, sections, and so on, so Chapter 1 of Part I is not numbered as I.1 but as 1.

Both `\chapter` and `\part` take a title as an argument, but the `\chapter` command also has an optional argument:

`\chapter[`*`short_title`*`]{`*`title`*`}`

The optional *short_title* argument is used in the running head. You may need to protect any fragile commands in *title* and *short_title* with the `\protect` command (see Section 5.3.3).

Here is the whole hierarchy:

```
\part

\chapter
   \section
      \subsection
         \subsubsection
            \paragraph
               \subparagraph
```

Book document classes, as a rule, do not number subsubsections or any of the sectioning divisions below that level.

Equations in chapters

By default, equations are numbered from 1 within chapters. So in Chapter 1 as well as in Chapter 3, the equations are numbered (1), (2), and so forth. If you have the

`\numberwithin{equation}{chapter}`

command in the preamble, then equations in Chapter 2 are numbered as (2.1), (2.2), and so on.

18.1.2 Division of the body

The book document classes formalize the division of the body into three parts.

Front matter The material that appears in the front of the document, including the title pages (normally four), table of contents, preface, introduction, and so on. LaTeX numbers these pages using roman numerals. The front matter is introduced with the `\frontmatter` command.

Main matter The main part of the book, including the appendices if any. Page numbering starts from 1 using arabic numerals. The main matter is introduced with the `\mainmatter` command.

Back matter Material that appears in the back of the book, including the bibliography, index, and various other sections, such as the colophon, afterword, and so on. The back matter is introduced with the `\backmatter` command.

For the `book` document class—and the document classes built on it—in the front and back matter, the `\chapter` command does not produce a chapter number but the title is listed in the table of contents. So you can start your introduction with

```
\chapter{Introduction}
```

Within such a chapter, you should use the `*`-ed forms of the sectioning commands `\section`, `\subsection`, and so on, otherwise you have sections with numbers such as 0.1.

In the main matter, the `\appendix` command marks the beginning of the appendices. Each subsequent chapter becomes a new appendix. For example,

```
\appendix
\chapter{A proof of the Main Theorem}\label{A:Mainproof}
```

produces an appendix with the given title.

Note that appendices may be labeled and cross-referenced. In Appendix A, sections are numbered A.1, A.2, and so on, subsections in A.1 are numbered A.1.1, A.1.2, and so on. The precise form these numbers take depends, of course, on the document class, packages, and user-specific changes (see Section 15.5.1).

See Section 18.3.1 for a detailed example.

For the `amsbook` document class—and the document classes built on it—the `\chapter` and `\chapter*` commands always produce a title listed in the table of contents.

The following two questions are frequently asked:

My book has only one appendix. How can I get it to be called just "Appendix", not "Appendix A"?

The single appendix in my book is being labeled "Appendix A". How can I change this to just "Appendix"? This appendix has a title, so the answer to the preceding question doesn't apply.

These questions are answered in the author FAQ of the AMS, go to

```
http://www.ams.org/authors/author-faq.html
```

18.1.3 Document class options

The options and defaults for the book document classes are the same as those of other document classes (see Sections 11.5 and 12.1.2) with a few exceptions.

Two-sided printing

Options: `twoside` *default*
`oneside`

The `twoside` option formats the output for printing on both sides of a page.

Titlepage

Options: `titlepage` *default*
`notitlepage`

The `titlepage` option creates a separate title page. The `notitlepage` option creates no separate pages.

Chapter start

Options: `openright` *default*
`openany`

A chapter always starts on a new page.

The `book` document class—and the document classes built on it—use the option `openright` to start each chapter on an odd page, while the option `openany` starts each chapter on the first available new page. If you use the default option, end each chapter with the command

```
\cleardoublepage
```

Then if a chapter ends on an odd page, a blank page is added with no header or page number. The `\cleardoublepage` command is correctly coded if you use `amsbook`. Otherwise, use the package `cleardoublepage.sty` (in the `samples` folder).

The `amsbook` document class—and the document classes built on it—automatically clears to a right-hand page and leaves a totally blank page if needed.

18.1.4 Title pages

The `book` document class supports the commands: `\title`, `\author`, `\date`, and `\maketitle` (see Section 12.1.1). The `amsbook` document class supports the same commands as `amsart` (see Section 11.2).

You can design your own title page within the `titlepage` environment, which does not require the use of the `\maketitle` command. Title pages for books, of course, should be created by a book designer for the publisher.

18.1.5 Springer's document class for monographs

We choose `svmono.cls`, Springer's document class for monographs, to demonstrate the sophisticated appearance of a book typeset with a professionally designed document class. On the next three pages, I display the title page, the first Table of Contents page, and the first page of Chapter 1 of Claudio Procesi's book on Lie groups.

Claudio Procesi
Università di Roma La Sapienza

Lie Groups

An Approach through Invariants and Representations

Springer

Contents

Introduction xix

Conventional Notations xxiii

1 General Methods and Ideas 1
1 Groups and Their Actions 1
1.1 Symmetric Group 1
1.2 Group Actions 2
2 Orbits, Invariants and Equivariant Maps 4
2.1 Orbits 4
2.2 Stabilizer 5
2.3 Invariants 7
2.4 Basic Constructions 7
2.5 Permutation Representations 8
2.6 Invariant Functions 10
2.7 Commuting Actions 11
3 Linear Actions, Groups of Automorphisms, Commuting Groups 11
3.1 Linear Actions 11
3.2 The Group Algebra 13
3.3 Actions on Polynomials 15
3.4 Invariant Polynomials 16
3.5 Commuting Linear Actions 17

2 Symmetric Functions 19
1 Symmetric Functions 19
1.1 Elementary Symmetric Functions 19
1.2 Symmetric Polynomials 21
2 Resultant, Discriminant, Bézoutiant 22
2.1 Polynomials and Roots 22

1

General Methods and Ideas

Summary. In this chapter we will develop the formal language and some general methods and theorems. To some extent the reader is advised not to read it too systematically since most of the interesting examples will appear only in the next chapters. The exposition here is quite far from the classical point of view since we are forced to establish the language in a rather thin general setting. Hopefully this will be repaid in the chapters in which we will treat the interesting results of Invariant Theory.

1 Groups and Their Actions

1.1 Symmetric Group

In our treatment groups will always appear as transformation groups, the main point being that, given a set X, the set of all bijective mappings of X into X is a group under composition. We will denote this group $S(X)$ and call it *the symmetric group* of X.

In practice, the full symmetric group is used only for X a finite set. In this case it is usually more convenient to identify X with the discrete interval $\{1, \ldots, n\}$ formed by the first n integers (for a given value of n). The corresponding symmetric group has $n!$ elements and it is denoted by S_n. Its elements are called *permutations*.

In general, the groups which appear are subgroups of the full symmetric group, defined by special properties of the set X arising from some extra structure (such as from a topology or the structure of a linear space, etc.). The groups of interest to us will usually be symmetry groups of the structure under consideration. To illustrate this concept we start with a definition:

Definition. A partition of a set X is a family of nonempty disjoint subsets A_i such that $X = \cup_i A_i$.

A partition of a number n is a (non-increasing) sequence of positive numbers:

$$m_1 \geq m_2 \geq \cdots \geq m_k > 0 \text{ with } \sum_{j=1}^{k} m_j = n.$$

18.2 Tables of contents, lists of tables and figures

A long document, as a rule, has a table of contents. It may also include a list of figures and a list of tables.

18.2.1 Tables of contents

What goes into the table of contents?

For the `amsbook` document class—and the document classes built on it—all titles, not the short titles, of the sectioning commands, whether `*`-ed or not, subject only to the value of the `tocdepth` counter, as described in the last subsection of Section 15.5.1. For instance, if `tocdepth` is set to 2, the default, then the titles of chapters, sections, and subsections are included in the table of contents, and subsubsections are excluded.

This leaves us with the problem, what do we do if the title is too long? You cannot break the line with `\\`, because this would the appear in table of contents. The AMS coded the following solution: enter the line break in the form

```
\except{toc}{\linebreak}
```

For the `book` document class—and the document classes built on it—the title or optional argument of the sectioning commands, subject to the value of the `tocdepth` counter, with the following exceptions:

- In Section 10.4.1 we discuss the `*`-ed versions of sectioning commands. They are excluded from the table of contents.
- If the sectioning command has a short title, then it is the short title that is utilized. The example in Section 11.2 shows why this is important. If you have `\\` in the title, you must have a short title without it, otherwise the linebreak would show up in the running head and the table of contents.

When you typeset your document with a table of contents, LaTeX creates a file with the `toc` extension. The next time the document is typeset, the `toc` file is typeset too and included in your typeset document at the point where the command

```
\tableofcontents
```

appears in the source file, normally in the front matter. If your source file is named `myart.tex`, the `toc` file is named `myart.toc`. This file lists all the sectioning units as well as their titles and page numbers.

If you already have a `toc` file, the `\tableofcontents` command typesets a table of contents using the previously created `toc` file and creates a new `toc` file.

LaTeX adds a line to the table of contents, formatted like a section title, if you include the command

```
\addcontentsline{toc}{section}{text_to_be_added}
```

in your source file. There are three arguments:

1. The first argument informs LaTeX that a line, the third argument, should be added to the `toc` file.
2. The second argument specifies how the line should be formatted in the table of contents. In our example, the second argument is `section`, so the line is formatted as a section title in the table of contents. The second argument must be the name of a sectioning command.
3. The third argument is the text to be added.

You can add an unformatted line to the table of contents with the command

```
\addtocontents{toc}{text_to_be_added}
```

Such a command can also be used to add vertical spaces into the table of contents. For instance, if you want to add some vertical space before a part, you should insert the following line before the sectioning command for the part:

```
\addtocontents{toc}{\protect\vspace{10pt}}
```

The `toc` file is easy to read. The following are typical lines from the table of contents file for a document using the `book` document class:

```
\contentsline{section}{\numberline {5-4.}Top matter}{119}
\contentsline{subsection}{\numberline {5-4.1.}
Article info}{119}
\contentsline {subsection}{\numberline {5-4.2.}
Author info}{121}
```

Section 15.5.1 explains how you can specify which levels of sectioning appear in the table of contents. Section 2.3 of *The LaTeX Companion,* 2nd edition [46] lists the style parameters for the table of contents. It also shows you how to define new `toc`-like files and use multiple tables of contents in a single document, for instance, adding a mini table of contents for each chapter.

Tip You may have to typeset the document three times to create the table of contents and set the numbering of the rest of the document right.

---

1. The first typesetting creates the `toc` file.
2. The second inserts the table of contents with the old page numbers into the typeset document, re-records in the `aux` file the page numbers, which may have changed as a result of the insertion, and cross-references in the `aux` file, and generates a new `toc` file with the correct page numbers.

3. The third typesetting uses these new `aux` and `toc` files to typeset the document correctly and creates a new `toc` file.

Fragile commands in a movable argument, such as a section (short) title, must be `\protect`-ed (see Section 5.3.3). Here is a simple example using the table of contents. If the document contains the `\section` command

```
\section{The function \( f(x^{2}) \)}
```

the section title is stored in the `toc` file as

```
\contentsline {section}{\numberline
{1}The function\relax $ f(x^{2}) \relax \GenericError { }
{LaTeX Error: Bad math environment delimiter}{Your
command was ignored.\MessageBreak Type I <command>
<return> to replace it with another command,\MessageBreak
or <return> to continue without it.}}{1}
```

and the `log` file contains the message

```
! LaTeX Error: Bad math environment delimiter.


 ...
l.1 ...continue without it.}}{1}
```

Error messages usually refer to a line in the source file, but in this case the error message refers to a line in the `toc` file.

The correct form for this section title is

```
\section{The function \protect\( f(x^{2}) \protect\)}
```

or, even simpler,

```
\section{The function $f(x^{2})$}
```

Note that this example is merely an illustration of unprotected fragile commands in movable arguments. As a rule, avoid using formulas in (sectioning) titles.

18.2.2 Lists of tables and figures

If you place a `\listoftables` command in the document, LaTeX stores information for the list of tables in a `lot` file. The list of tables is inserted into the body of your document at the point where the command appears, normally in the front matter, following the table of contents.

A list of figures, similar to a list of tables, can be compiled with the command `\listoffigures`. This command creates an auxiliary file with the extension `lof`.

An optional argument of the `\caption` commands in your tables and figures can replace the argument in the list of tables and figures. Typically, the optional argument is used to specify a shorter caption for the list of tables or list of figures. There are other uses. For instance, you may notice that, as a rule, captions should be terminated by periods. If in the list of tables or list of figures, your book style fills the space between the text and the page number with dots, the extra period looks bad. This problem goes away if you use the following form of the `\caption` command:

```
\caption[title]{title.}
```

There are analogs of the table of contents commands for use with tables and figures. The command

```
\addtocontents{lot}{line_to_add}
```

adds a line to the list of tables or to the list of figures with the first argument `lof`.

18.2.3 Exercises

For exercises, `amsbook` provides the `xcb` environment. It is used for a series of exercises at the end of a section or chapter. The argument of the environment specifies the phrase (such as `Exercises`) to begin the list:

```
\begin{xcb}{Exercises}
\begin{enumerate}
\item A finite lattice $L$ is modular if{f} it does not
contain a pentagon.\label{E:pent}
\item Can the numbers of covering pairs in\label{E:incr}
Exercise~\ref{E:pent} be increased?\label{E:incr}
\end{enumerate}
\end{xcb}
```

which typesets as

Exercises
(1) A finite lattice L is modular iff it does not contain a pentagon.
(2) Can the numbers of covering pairs in Exercise 1 be increased?

18.3 Organizing the files for a book

An article is typically one `tex` file and maybe some EPS and/or PDF files for the illustrations. On the other hand, a book, like this one, is composed of hundreds of files. In this section, I describe how the files for this book are organized.

There are three commands that help with the organization:
`\include` `\includeonly` `\graphicspath`
We discuss these commands in this section.

18.3.1 The folders and the master document

All the files for this book are in a folder `MiL4` and in this folder the most important document is `MiL4.tex`, the *master document*.

The master document, `MiL4.tex` reads, in a somewhat simplified form, as follows:

```
%MiL4 master document
\documentclass[leqno]{book}
\usepackage{MiL4}
\usepackage{makeidx}
\makeindex
\usepackage{cleardoublepage}
\includeonly{
%frontmatter,
%intro,
%Chapter1,% terminology
...
Chapter18,% books
%appA,% install
...
}
\begin{document}
\frontmatter
\include{frontmatter}
\tableofcontents
\listoftables\listoffigures
\include{intro}%Intro
\mainmatter
\include{Chapter1}%Setting up
...
\include{Chapter18}% writing books

\appendix
\include{AppendixA}%install
...
\backmatter
\printindex
\end{document}
```

Some parts of the master file deserve comment, for example, the third line,

```
\usepackage{MiL4}
```

loads the command file

```
MiL4.sty
```

which contains all the commands defined for the book and the code for the book style. Since the book style is based on `book.cls`, in line 5, we load the `makeidx` package and print the index with `\printindex` (see Section 17.1).

Line 7 states

```
\usepackage{cleardoublepage}
```

This creates blank pages after chapters that end on an odd page number (see Section 18.1.3). For the three `...matter` commands, see Section 18.1.2.

18.3.2 Inclusion and selective inclusion

This book is pieced together by the `\include` commands in the master document. For example,

```
\include{Chapter18}
```

inserts the contents of the file `Chapter18.tex`, starting on a new page, as though its contents had been typed at that place in the document. The master document for this book has 29 `\include` commands.

Rule ■ File termination

Terminate every file you `\include` with an `\endinput` command.

If you terminate an `\include`-ed file with `\end{document}`, LaTeX gives a warning such as:

```
(\end occurred when \iftrue on line 6 was incomplete)
(\end occurred when \ifnum on line 6 was incomplete)
```

If you use `\include` commands in the master file, as in the example in Section 18.3.1, then you can use the `\includeonly` command for selective inclusion. The lines of the `\includeonly` command parallel the `\include` commands. Block comment all the lines of the argument of the `\includeonly` command, and uncomment the chapter you are working on. In the example above, I am working on this chapter.

The argument of the `\includeonly` command is a list of files separated by commas. If you want to typeset the whole book, uncomment all the lines.

18.3.3 Organizing your files

The MiL4 folder, containing the files of this book, contains the master document, MiL4.tex, the command file MiL4.sty, and all the tex files listed in the master document, that is, the chapters, the frontmatter, the introduction, the appendices, and of course, all the auxiliary files that LaTeX creates.

This book contains about 300 illustrations in a subfolder Graphics of the folder MiL4.tex. We have to tell LaTeX to look for the illustrations in this folder. We do this with the command

```
\graphicspath{{Graphics\}}
```

in the preamble. If you have two folders, Illustr1 and Illustr2 for illustrations, the \includegraphics command takes the form

```
\graphicspath{{Illustr1\}{Illustr2\}}
```

Even if you have more than one folder for the illustrations, you must make sure that each graphics file has a unique name.

We place the \graphicspath command in MiL4.sty.

In the above commands, \ is appropriate for Mac and UNIX computers. For a PC, use / instead.

If you submit a dvi file, you cannot use the \graphicspath command.

18.4 Logical design

The discussion of logical and visual design in Section 4.3.2 applies to books even more than to articles. Since books are long and complex documents, errors in the logical design are much harder to correct.

Let us review some common-sense rules.

Rule 1 ■ Stick with the sectioning commands provided by the document class. Define the non-standard structures you wish to use as environments.

Here is an example which is obviously bad:

```
\vspace{18pt}

\noindent \textbf{Theorem 1.1.}
\textit{This is bad.}

\vspace{18pt}
```

And a good way to achieve the same result:

```
\begin{theorem}\label{T:Goodtheorem}
This is a good theorem.
\end{theorem}
```

The bad example creates a number of difficulties.

- You have to number the theorems yourself. Adding, deleting, and rearranging theorems becomes difficult and updating cross-references is even harder.
- It is difficult to keep such constructs consistent.
- If the publisher decides to increase the white space before and after the theorems to 20 points, finding and changing all the appropriate commands becomes a tedious and error prone task.

Rule 2 ■ Define frequently used constructs as commands.

Rather than

```
\textbf{Warning! Do not exceed this amount!}
```

define

```
\newcommand{\important}[1]{\textbf{#1}}
```

and type your warnings as

```
\important{Warning! Do not exceed this amount!}
```

You or your editor can then change all the warnings to a different style with ease.

Rule 3 ■ Avoid text style commands.

If you use small caps for acronyms, do not type

```
\textsc{ibm}
```

but rather define

```
\newcommand{\ibm}{\textsc{ibm}}
```

and then

```
\ibm
```

or more generally

```
\newcommand{\acronym}[1]{\textsc{#1}}
```

and then

```
\acronym{ibm}
```

Rule 4 ■ Avoid white space commands.

Occasionally, you may feel that there should be some white space separating two paragraphs, so you do the following:

```
paragraph 1

\medskip

paragraph 2
```

It would be better to define a new command, say `\separate`, as

```
\newcommand{\separate}{\medskip}
```

and type the previous example as

```
paragraph 1

\separate

paragraph 2
```

Now such white space can be adjusted throughout the entire document by simply redefining one command. Note that redefining `\medskip` itself may have unintended side effects:

- Many environments depend on LaTeX's definition of `\medskip`.
- You may have used `\medskip` in other situations as well.

Here is a short list of commands you should avoid:

```
\bigskip  \hfil   \hspace   \parskip    \vfill  \vspace
\break    \hfill  \kern     \smallskip  \vglue
\eject    \hglue  \medskip  \vfil       \vskip
```

18.5 Final preparations for the publisher

Throughout this book, there are a number of "don'ts". Most are practices you should avoid while writing articles. When writing a book, it is even more important not to violate these rules.

When the editors, including the copy editor, are finished with your manuscript and you have the document class designed for the book, then you can start on the final preparations.

Step 1 ■ Eliminate all TeX commands.

TeX commands, that is, Plain TeX commands that are not part of LaTeX (not listed as LaTeX commands in the index of this book) may interfere with LaTeX in unexpected ways. They may also cause problems with the style file that is created for your book.

Step 2 ■ Collect all your user-defined commands and environments together in one place, preferably in a separate command file (see Section 15.3).

Step 3 ■ Make sure that user-defined commands for notations and user-defined environments for structures are used consistently throughout your document.

This book uses the command `\doc` for document names, so `intrart` is typed as `\doc{intrart}`. Of course, `\texttt{intrart}` gives the same result, but if you intermix `\doc{intrart}` and `\texttt{intrart}` commands, you lose the ability to easily change the way document names are displayed.

Step 4 ■ Watch out for vertical white space adding up.

- Do not directly follow one displayed math environment with another. Multiple adjacent lines of displayed mathematics should all be in the same environment.
- If your style file uses interparagraph spacing, avoid beginning paragraphs with displayed math.

For instance,

```
\[
   x=y
\]
```

```
\[
   x=z
\]
```

is wrong. Use, instead, an `align` or `gather` environment.

Step 5 ■ If possible, do not place "tall" mathematical formulas inline. All formulas that might change the interline spacing, as a rule, should be displayed.

You can find examples on pages 23 and 370. Here is one more example, double hat accents used inline: $\hat{\hat{A}}$.

Step 6 ■ Read the `log` file.

- Watch for line-too-wide warnings (see Section 2.3).
- Check for font substitutions (see Section 5.6.7).

If you find lines that are too wide:

- Fix wide lines by rewording the sentence or adding optional hyphens (see Section 5.4.9).
- Break displayed formulas so that they fit comfortably within the line.

Adobe Acrobat Professional has a preflight utility in the `Advanced` menu. It will check whether the PDF version of your typeset document has all the fonts it requires.

Step 7 ■ Do not assume that gray boxes or color illustrations appear when published exactly the way that they look on your monitor or printer.

Color work requires calibration of monitors and printers. It is often best left to the experts at the publisher.

Step 8 ■ Do not assume that the application that created your EPS files (see Section 10.4.3) can create high-quality EPS files.

Many applications can create EPS files or convert files to EPS format. Very few do it right. Ask your publisher what applications they recommend.

Font substitutions can also cause problems:

- A font that was used in typesetting the document may not be the font you intended. Missing fonts are substituted and the substitute fonts are rarely satisfactory.
- A special trap: Your publisher may have more, or maybe fewer, fonts than you do! As a result, the font substitutions on your publisher's system may be different from those on yours. Make sure that the fonts you use are not substituted.

18.6 If you create the PDF file for your book

Many publishers take your manuscript, prepared as described in Section 18.5, and guide it through the final steps for printing. Some books, however, are prepared by the authors for printing using a custom document class for books and submitted to the publisher as PDF files. If your book falls into this category, there are a few more things you should do before you create the final PDF file for your book.

Adjust the pages

Make sure that you are satisfied with the way the document is broken into pages by LaTeX and with the placement of the `figure` and `table` environments (see Section 10.4.3). If necessary, you should make last-minute changes to adjust page breaks. You may find the `\enlargethispage` command (see Section 5.7.3) very helpful at this stage. Just be sure to apply it on both facing pages.

To ensure that

- Page numbers in the index are correct
- `\pageref` references (see Section 10.4.2) are correct
- Marginal comments (see Section 5.9.4) are properly placed
- Tables and figures are properly placed

insert page breaks where necessary. Where pages break, add the three commands `\linebreak`, `\pagebreak`, and `\noindent`. Here is an example. The bottom of page 3 and the top of page 4 of my book *General Lattice Theory* [28] are shown in Figure 18.1.

Now let us assume that we have to manually do this page break because some index items attached to this paragraph generate incorrect page numbers. The paragraph split by the page break is

```
In other words, lattice theory singles out a special type
of poset for detailed investigation. To make such a
definition worthwhile, it must be shown that this class
of posets is a very useful class, that there are many
```

```
such posets in various branches of mathematics (analysis,
topology, logic, algebra, geometry, and so on), and that
a general study of these posets will lead to a better
understanding of the behavior of the examples.
This was done in the first edition of  G.~Birkhoff's
\emph{Lattice Theory} \cite{gB40}. As we go along,
we shall see many examples, most of them in the
exercises. For a general survey of lattices in
mathematics, see G.~Birkhoff \cite{gB67} and H.~H.~Crapo
and G.-C.~Rota \cite{CR70}.
```

When typesetting this paragraph, LaTeX inserts a page break following

```
This was done in the first edition of G.~Birkhoff's.
```

So we edit four lines as follows:

```
understanding of the behavior of the examples.
This was done in the first edition of  G.~Birkhoff's
\linebreak

\pagebreak

\noindent \emph{Lattice Theory} \cite{gB40}. As we go
along, we shall see many examples, most of them in the
```

This change does not affect the appearance of the typeset page, but now pages 3 and 4

In other words, lattice theory singles out a special type of poset for detailed investigation. To make such a definition worthwhile, it must be shown that this class of posets is a very useful class, that there are many such posets in various branches of mathematics (analysis, topology, logic, algebra, geometry, and so on), and that a general study of these posets will lead to a better understanding of the behavior of the examples. This was done in the first edition of G. Birkhoff's

---

4 I. First Concepts

Lattice Theory [1940]. As we go along, we shall see many examples, most of them in the exercises. For a general survey of lattices in mathematics, see G. Birkhoff [1967] and H. H. Crapo and G.-C. Rota [1970].

Figure 18.1: A page break.

are separated by a \pagebreak. Make sure that any \index or \label commands are moved to the appropriate half of the paragraph. Now all index commands generate the correct page numbers.

Of course, if the page break is between paragraphs, only the \pagebreak command is needed. If the break occurs in the middle of a word, use \-\linebreak to add a hyphen.

This method works about 95 percent of the time. Occasionally, you have to drop either the \linebreak or the \pagebreak command.

Check for missing fonts and other defects

Open the PDF file of your book in Adobe Reader (or even better, in Adobe Acrobat Pro). Under File, go to Properties... and click on the Fonts tab. You will find a long list of fonts. Each one should be marked Embedded Subset.

If all your fonts are embedded, you are in good shape.

Adobe Acrobat Pro has an excellent set of utilities to check whether your PDF file is ready for printing. You find them under Advanced>Preflight.... In the Preflight window, choose Digital printing (B/W)—unless your book will print in color, in which case choose Digital printing (color). Click on Execute. Adobe Acrobat Pro will correct all the mistakes it finds in the file and presents a detailed report.

Adobe Acrobat Pro also comes to the rescue if some fonts are not embedded. In the Preflight window, expand the PDF analysis group and select List text using non-embedded fonts and click on Execute. The report will list all pages with fonts missing and if you select a page, Snap view will show you the trouble spot.

In the help system of Adobe Acrobat Pro, search for Customize Adobe PDF settings and Embed fonts using the TouchUp Text tool for detailed instructions on how to embed the missing fonts.

Other adjustments

- Move the figure and table environments (see Section 10.4.3) physically close to where they appear in the typeset version, and change the optional argument of the figure and table environments to !h.
- Balance the white space on each page as necessary.
- Generate the index only after the page breaks are fixed.

Polish the auxiliary files

- Typeset the document one last time and then place the \nofiles command in the preamble (see Section D.3.4) to make sure that the auxiliary files are not overwritten.

- Normally, you should not have to edit the table of contents (`toc`) file or the `lot` and `lof` files (see Section 18.2) and your style file should take care of the formatting. Sometimes, however, an unfortunate page break makes editing necessary. In an appropriate place, you may want to add to the text the command

  ```
  \addtocontents{toc}{\pagebreak}
  ```

  to avoid such edits.

- Create the index (`ind`) file from the new `aux` file, as described in Section 17.3. *The Chicago Manual of Style,* 15th edition [11] has a section on bad breaks, remedies, and *Continued* lines in the index. Break the `ind` file into pages. To minimize bad breaks, use the `\enlargethispage` command where necessary (see Section 5.7.3). Add any *Continued* entries.

APPENDIX

A

Installation

In case you do not already have a LaTeX installation, in Sections A.1 and A.2, we describe how to install LaTeX on your computer, a PC or a Mac. The installation is much easier if you obtain TeX Live 2007 (or later) from the TeX Users Group, TUG (see Section E.2). It contains both the TeX implementations we discuss.

No installation is given for UNIX computers. The attraction of UNIX to its users is the incredibly large number of options, from the UNIX dialect, to the shell, the editor, and so on. A typical UNIX user downloads the code and compiles the system. This is obviously beyond the scope of this book. Nevertheless, TeX Live 2007 (or later) from the TeX Users Group supplies the compiled (binaries) of LaTeX for a number of UNIX variants.

First read Chapter 1, so that in this Appendix you recognize the terminology we introduce there. I will assume that you become sufficiently familiar with your LaTeX distribution to be able to perform the editing cycle with the sample documents.

A.1 LaTeX on a PC

On a PC, most mathematicians use MiKTeX and the editor WinEdt. So it seems appropriate that we start there.

A.1.1 Installing MiKTeX

If you made a donation to MiKTeX or if you have the TeX Live 2007 (or later) from the TeX Users Group, then you have a CD or DVD with the MiKTeX installer. Installation then is in one step and very fast. In case you do not have this CD or DVD, we show how to install from the Internet. To begin, go to the MiKTeX home page:

http://miktex.org

and under the Download/Install click on the version you want to install.[1] You are directed to the MiKTeX download page, where you click on Download MikTeX Net Installer. This takes you to a list of the download sites, called "mirrors". Choose one geographically close to you and click Download next to your pick. You are asked whether to Run or Save the installer application. Choose Save to save and now you have the setup application on your computer.

Run setup and the MiKTeX Setup Wizard should start automatically. Then click Next and choose the task, Download only. Click Next again to choose the size of the download and choose Complete MikTeX. Again you have to choose a download site, and click Next a few more times, then Start, and the download starts. When it is complete, almost 35,000 files later, click Close. Now you have the files you need in the next step.

The next task is installation. Run setup again, and up comes the Wizard. Click Next, and the task Install MikTeX is selected for you. Click Next, make sure you select Complete MikTeX. Click Next a few more times, select the default paper size, click Start, and the installation starts. When it is finished, click Close.

A.1.2 Installing WinEdt

You can download WinEdt from its Web site and use it for 30 days before you pay the license fee. We now install WinEdt from the CD you are sent after you pay the license fee. Go to License and Registration at

http://www.winedt.com

Put the WinEdt installer CD in the DVD drive. The WinEdt Setup Wizard starts automatically. After accepting the licence, click Next a few times until WinEdt is installed and then click Finish.

After installation, the
WinEdt Configuration Wizard

[1] We follow the instructions for MiKTeX 2.5. Hopefully, this will also assist you with later versions.

starts automatically. Click on the `File Associations` tab and click on `Modify file type associations...` under `Current User`, which is down the right side of the window, and then click `OK`. This gives all TeX files a lion icon and automatically associates them with `WinEdt` so that double clicking a TeX file automatically opens it in `WinEdt`. Clicking `OK` to close the Wizard.

`WinEdt`'s claim to fame is its incredible customizability. Once you become familiar with the basic operations, you can make `WinEdt` behave the way you like.

A.1.3 The editing cycle

In Section 1.2 you created the `work` folder for your work files. Start `WinEdt` by double clicking the `WinEdt` icon and open the file `note1.tex` in `work`, see the top half of Figure A.1. Observe:

- In the right-hand corner, under the X button, the close application button, there is a small black x. All windows of `WinEdt` have such an x, this is the *close window* button.
- There are two rows of icons. The seventh from the right in the first row, a darkened lion's head, is the `TeXify` button, use it to typeset your LaTeX file. If you are not sure what an icon represents, let the cursor hover over it, and a brief description appears.
- A blue arrow in the left margin points at the line where the cursor is.

Click on the `TeXify` icon. `MiKTeX` typesets `note1.tex` and produces another file, `note1.dvi`. The new file is displayed by the application `Yap`, which was automatically installed for you with `MiKTeX`. Rearrange the `WinEdt` and `Yap` windows. You should get an arrangement similar to the bottom half of Figure A.1.

A.1.4 Making a mistake

`WinEdt` tells you if there is a mistake in your source file. To see what happens, click on the `WinEdt` window, and add a \ in line 11 of `note1.tex`, so that `personally` reads `\personally`. This makes `\personally` a command, which is a mistake (see Chapter 2). Click on the `TeXify` icon. We get the `TeXify ...` window, as in the top part of Figure A.2. At the `?` prompt, type `x` for "exit" and press Return.[2] You now see three windows, as shown in the bottom half of Figure A.2. The `Yap` window is mostly covered up. There is a new window, `note1.log`, the `log` window, in which the information from the `TeXify ...` window is recorded. In the `WinEdt` window, the blue arrow line pointer on the left indicates the offending line, and the mistake, `\personally`, is highlighted in red. Correct the mistake by deleting \, click on `TeXify`, and you are back in business.

[2] The user, recorded on Figure A.2, typed `s` for "scroll mode". LaTeX then completes the typesetting without stopping for errors (see Section D.4).

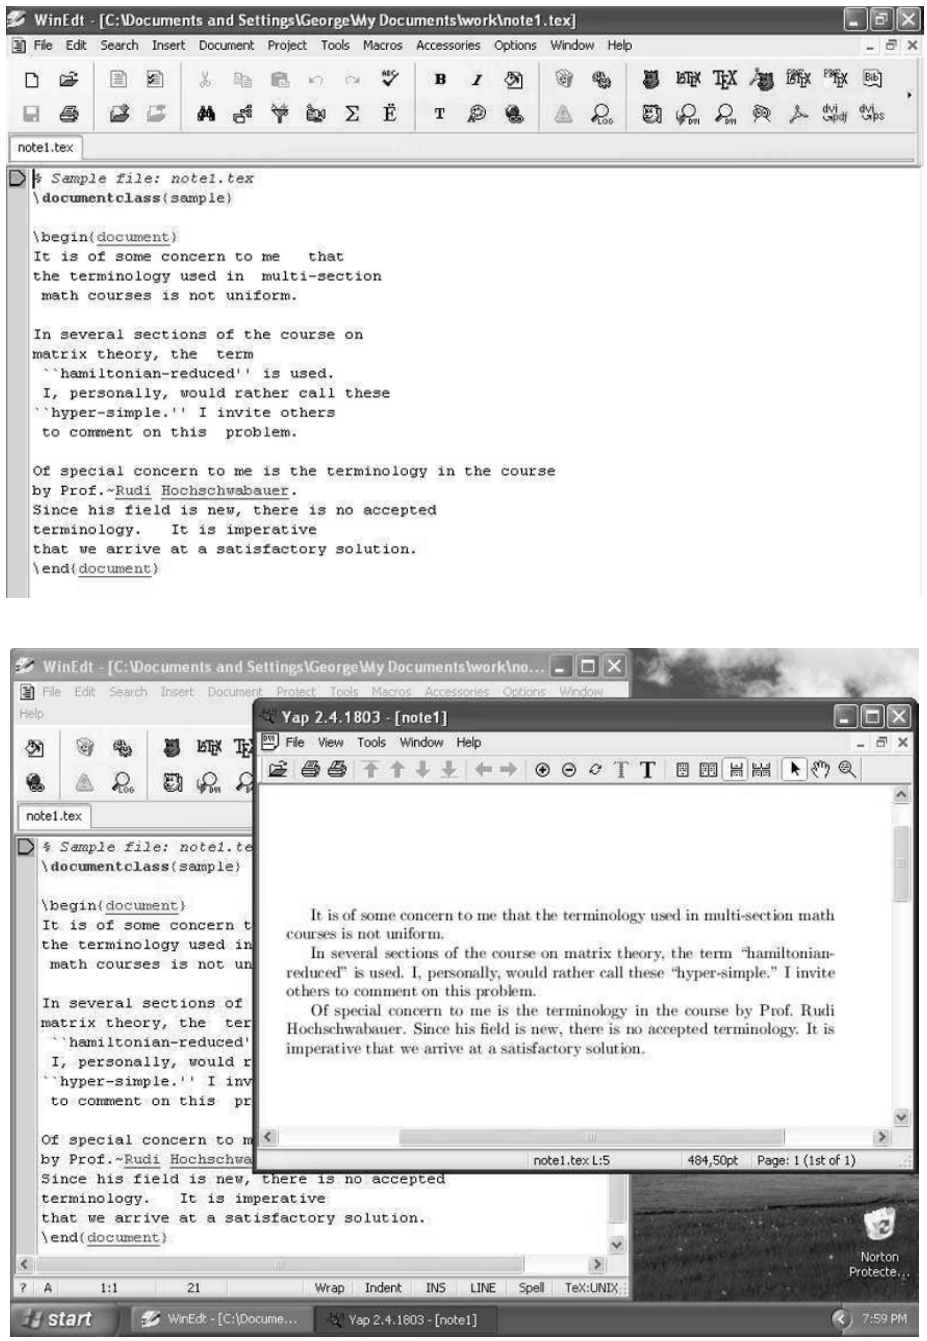
WinEdt - [C:\Documents and Settings\George\My Documents\work\note1.tex]
File Edit Search Insert Document Project Tools Macros Accessories Options Window Help
note1.tex
% Sample file: note1.tex
\documentclass(sample)
\begin(document)
It is of some concern to me that
the terminology used in multi-section
math courses is not uniform.
In several sections of the course on
matrix theory, the term
``hamiltonian-reduced'' is used.
I, personally, would rather call these
``hyper-simple.'' I invite others
to comment on this problem.
Of special concern to me is the terminology in the course
by Prof.~Rudi Hochschwabauer.
Since his field is new, there is no accepted
terminology. It is imperative
that we arrive at a satisfactory solution.
\end(document)
Yap 2.4.1803 - [note1]
File View Tools Window Help
It is of some concern to me that the terminology used in multi-section math courses is not uniform.
In several sections of the course on matrix theory, the term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple." I invite others to comment on this problem.
Of special concern to me is the terminology in the course by Prof. Rudi Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.
note1.tex L:5
484,50pt
Page: 1 (1st of 1)
Norton Protecte...
start
WinEdt - [C:\Docume...
Yap 2.4.1803 - [note1]
7:59 PM

Figure A.1: `note1.tex` opened in `WinEdt` and typeset.

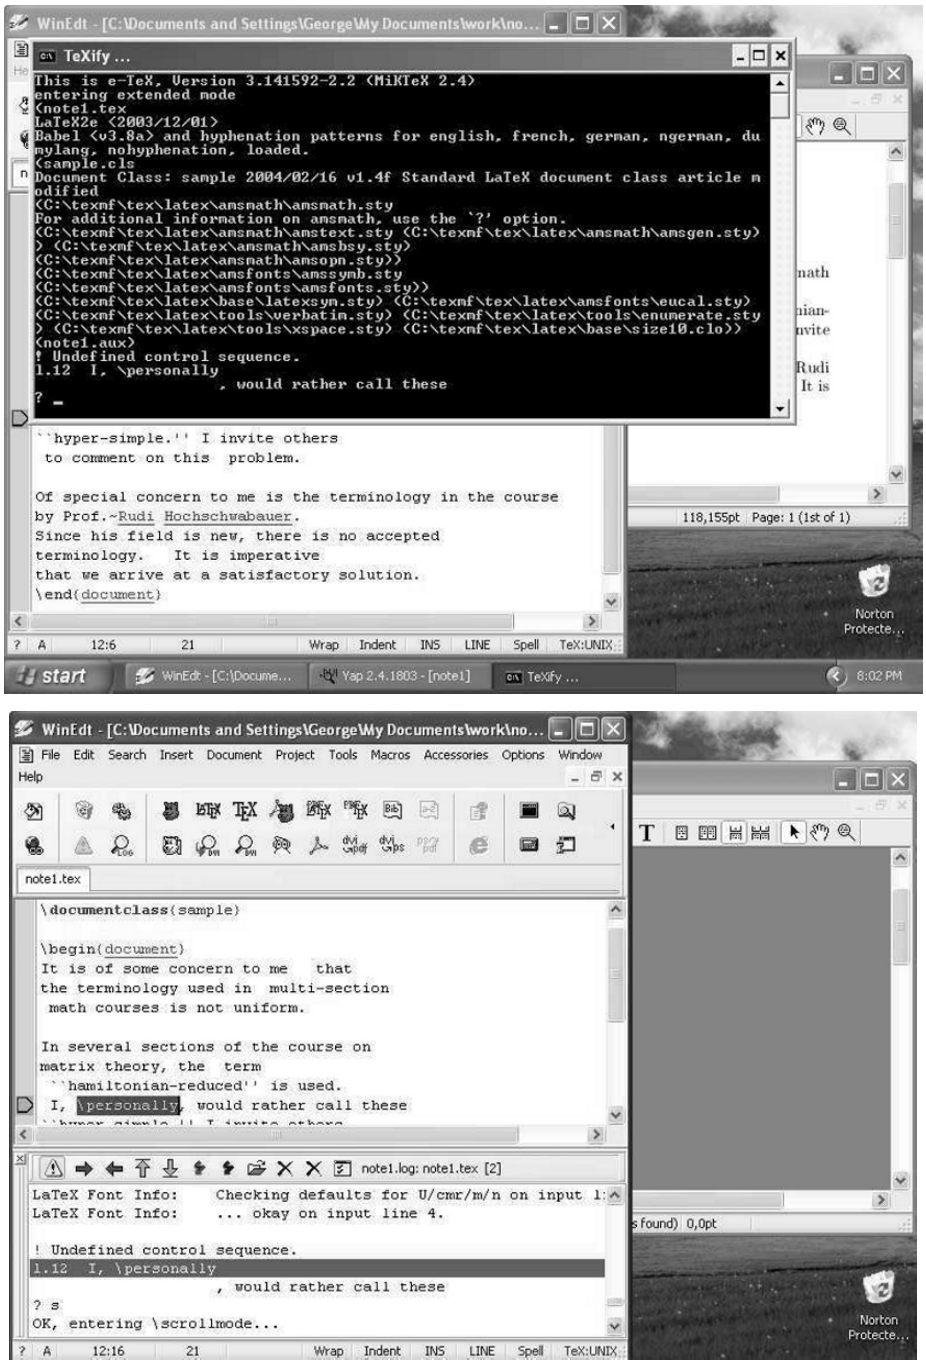

Figure A.2: The mistake identified and localized (showing the `log` window).

A.1.5 Three productivity tools

Now we see how the three productivity tools introduced in Section 1.4 are implemented in WinEdt and MiKTeX.

Synchronization This is known as *inverse search* in WinEdt and MiKTeX. To set it up, open Yap, for example, by Texifying the document note1.tex. Choose the menu item View>Options>Inverse DVI Search. A list now displays the editors detected. Select WinEdt, click Apply, and click OK. You are done.

- To jump from the typeset file in Yap to the source file in WinEdt, double click a word in the typeset file.
- To jump from the source file to the typeset file, click on the DVI Search icon, the magnifying glass with the green leaf attached to the handle. You then jump to the typeset file, where a marker indicates the beginning of the typeset version of the source line the cursor is on.

Block comment Select a number of lines in a source document and choose the menu option Edit>Move/Fill>Insert comment. Block uncomment is done with Edit>Move/Fill>Remove comment.

Go to line This is done with Search>Go to Line...

The icons and menu options all have keyboard equivalents. For instance, Go to line is Ctrl+G and TeXify is Ctrl+Shift and then press x.

A.1.6 An important folder

When using MikTeX, where do you put new style files and packages?

You can always place these files in your working folder. This is the simplest, but they will not be available when working with files outside that folder.

If you want these files accessible everywhere (from all folders), then make a new folder in the LocalTeXFM folder tree, say

```
C:\LocalTeXMF\MyStyles
```

and place these files there. In order for MiKTeX to find these files, you now need to update the MiKTeX FileName Database. Do this:

```
All Programs>MikTeX>MikTeX Options>Refresh FNDB
```

or access it directly via the drop down menus from within WinEdt:

```
Accessories>MikTeX Options
```

The best way to install new packages from CTAN is via the Package Manager, which is accessed via

```
All Programs>MikTeX>Package Manager
```

The Package Manager downloads the files from a CTAN mirror of your choice, then installs all files in their correct folders and updates MikTeX's filename database.

It is a good idea to run the MiKTeX Update Wizard on a regular basis to keep your system up to date:

```
All Programs>MikTeX>MikTeX  Update Wizard
```

A.2 LaTeX on a Mac

A.2.1 Installations

For the Mac, we install MacTeX,[3] which consists of the TUG's TeX Live and Richard Koch's TeXShop. If you have TeX Live (see Section E.2), put the DVD in your computer's DVD drive and follow the simple instructions. In a few minutes you are done. Otherwise, go to

```
http://www.tug.org/mactex/
```

and in the Downloading section, click on MacTeX-2007. After downloading about 700 MBs, you get the MacTeX-2007 "disk image" that contains the mactex installer package. The disk image should open and the application MacTeX-2007.mpkg should start automatically. A few more clicks—as in all Mac installations—and you are done.

The spelling checker

Finally, get the spell checker cocoAspell by Anton Leuski by going to

```
http://people.ict.usc.edu/~leuski/cocoaspell/home.html
```

and clicking on the download link, cocoAspell. This downloads the disk image cocoAspell.dmg, containing the installation package cocoAspell.mpkg. Follow the same process as above to mount this. Then double click on the installer package and follow the instructions.

In the Apple menu, choose System Preferences..., where you find a new one, Spelling. Double click on it, and choose a dictionary. I use the dictionary English(United States). You should also select the filters you need. They are explained on the page you obtain by clicking on the Filter button. I selected Texinfo and TeX/LaTeX. You may have to restart the computer for the spelling checker to work.

To invoke the spelling checker, select a word and press Command+Shift and :. It suggests a correct spelling. You can also add words to the dictionary.

To learn more about the dictionaries, read the documents in

/Library/Application Support/cocoAspell/ aspell6-en-6.0-0/doc/

[3] We follow the instructions for MacTeX-2007. Hopefully, this will also assist you with later versions.

A.2.2 Working with TeXShop

Custom settings

In due course, you can fully customize TeXShop as an advanced user. But to begin, there are just a few things to do. In the TeXShop menu choose Preferences... to open the TeXShop Preferences. To set the default font for the source files in TeXShop, click on the Document tab. Under Document Font click Set..., which brings up the Font window. Choose a font and size for the source files that is easy on your eyes. I use Courier and 12. Close the Font window.

Make sure that under Editor all items except Auto Complete are selected.

Now click the Preview tab and in the Preview Window Magnification enter a number for the magnification to be used for viewing the typeset version—I use 150. Once you type in the number, press Set. For Default Mouse Mode, choose Select Text. For Default Page Style, choose Multi-Page.

Under After Window Resize, choose Fixed Magnification. Then click on OK. Close the TeXShop Preferences window.

When you become more familiar with TeXShop, you may want to revisit these settings.

Changing a document for TeXShop

If

- you use the graphicx package, see intrart.tex in the samples folder as an example, and
- your document contains illustrations that have been saved as EPS graphics and included with the \includegraphics command,

then add the line

```
\usepackage{epstopdf}
```

in the preamble below the line

```
\usepackage{graphicx}
```

If you have many illustrations, it is preferable to open all the illustrations with TeXShop or Preview and save them in PDF format. Also, make sure that the extensions are not given in the \includegraphics commands, that is,

```
\usepackage{graphicx}
\includegraphics{products.eps}
```

is changed to

```
\usepackage{graphicx}
\includegraphics{products}
```

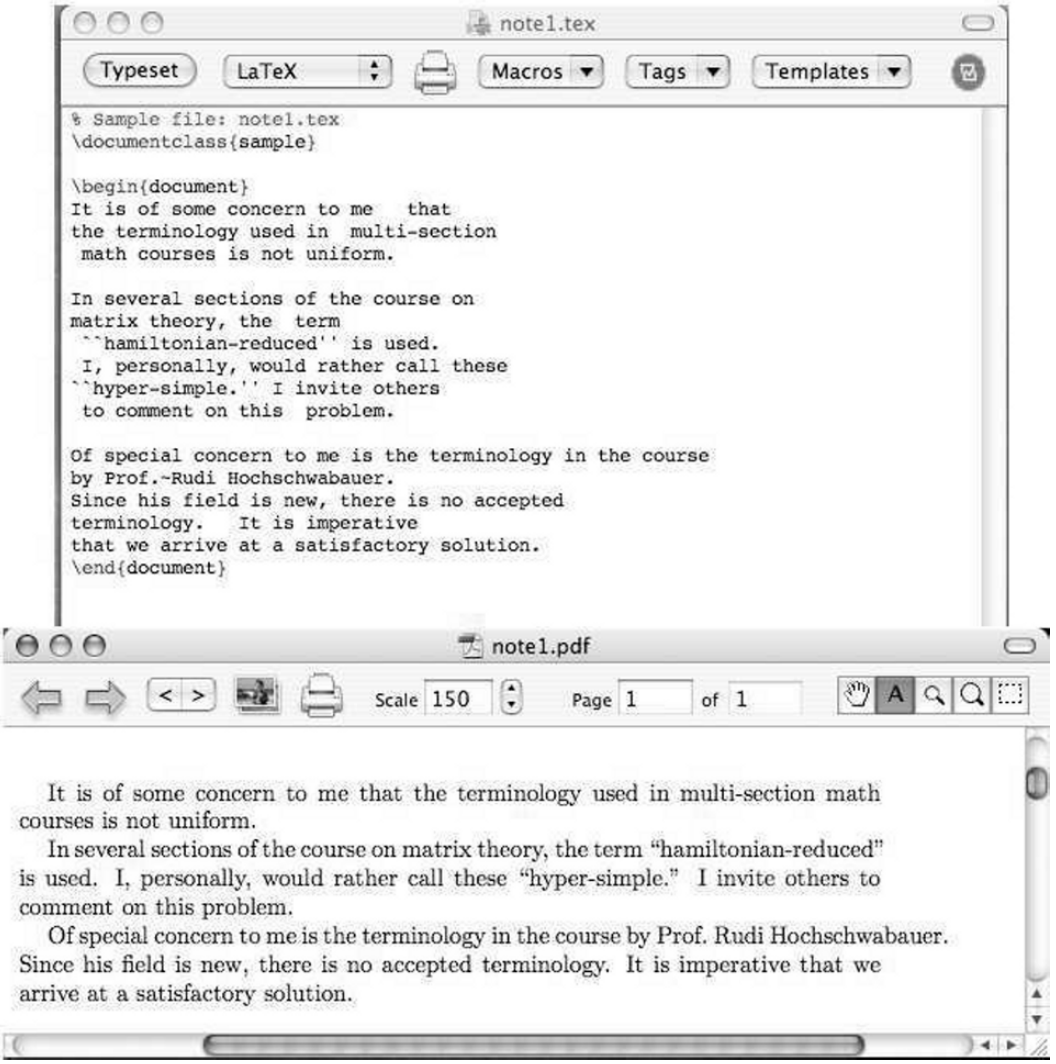
note1.tex
Typeset
LaTeX
Macros
Tags
Templates
% Sample file: note1.tex
\documentclass{sample}
\begin{document}
It is of some concern to me that
the terminology used in multi-section
math courses is not uniform.
In several sections of the course on
matrix theory, the term
``hamiltonian-reduced'' is used.
I, personally, would rather call these
``hyper-simple.'' I invite others
to comment on this problem.
Of special concern to me is the terminology in the course
by Prof.~Rudi Hochschwabauer.
Since his field is new, there is no accepted
terminology. It is imperative
that we arrive at a satisfactory solution.
\end{document}
note1.pdf
Scale 150
Page 1
of 1
It is of some concern to me that the terminology used in multi-section math courses is not uniform.
In several sections of the course on matrix theory, the term "hamiltonian-reduced" is used. I, personally, would rather call these "hyper-simple." I invite others to comment on this problem.
Of special concern to me is the terminology in the course by Prof. Rudi Hochschwabauer. Since his field is new, there is no accepted terminology. It is imperative that we arrive at a satisfactory solution.

Figure A.3: The document `note1.tex`: the source and the typeset version.

A.2.3 The editing cycle

In your `Document` folder, you created the `work` folder (see page 4). We are going to work with the document `note1.tex` in the `work` folder.

To start `TeXShop`, double click on `TeXShop.app` in the `Applications` folder, select the menu `File>Open...`, and navigate to the folder

```
Documents/work/note1.tex
```

Open the document.

In the upper left corner of the source window, click the `Typeset` button. A second window opens, the *preview window*, showing `note1.pdf`, the typeset version of `note1.tex`. Unlike `WinEdt`, discussed in Section A.1, which produces a file called `note1.dvi`, `TeXShop` produces a PDF file, `note1.pdf`.

Figure A.3 shows the two windows. At the top, you see `TeXShop`'s seven menus. For this introduction we ignore all but two menu options. You should use the `Help` menu to learn more and the `Macros Help` in the `Help` window along with the `Macro Editor` (open it with `Macros>Open Macro Editor...`) to become more productive.

A.2.4 Making a mistake

`TeXShop` tells you if there is a mistake in your source file. Open `note1.tex` again and introduce a silly error, say, in the line `\documentclass{amsart}`, delete the closing brace, so it reads `\documentclass{amsart`. A new window—the third!—pops up, called `note1 console`, see Figure A.4. This is the `log` window (see Section 1.3). Click on the button `Goto Error` and the cursor is placed in the source document pretty close to the error. Now you can correct the error and typeset again.

A.2.5 Three productivity tools

Now we see how the three productivity tools introduced in Section 1.4 are implemented in `TeXShop`.

Synchronization Command-click on a word in the source window. The preview window shows the corresponding typeset phrase circled in red. Similarly, command-click on a word in the preview window and the corresponding source phrase is highlighted in yellow—it helps to click on text with no LaTeX commands close by.

Block comment Select a number of lines in a source document, and choose the menu option `Format>Comment`. All the lines, the whole block, are commented out. The reverse is done with `Format>Uncomment`.

Go to line This is done with `Edit>Line Number...`

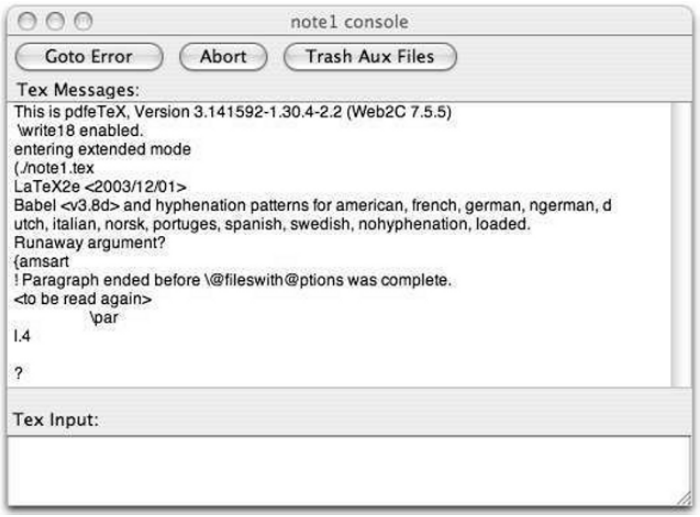

Figure A.4: The `note1.tex` console (`log` window).

Buttons and menu options all have keyboard equivalents. For instance, `Block comment` is Command + { and `Go to line` is Command + L.

A.2.6 An important folder

Create the `texmf` folder in the `Library` folder of your home folder—**not** the other `Library` folder, which is in the same folder as `Applications`. In `texmf`, create the `tex` folder, wherein you create the `latex` folder. Put all your personal (see Section 15.3) and additional `sty` files here.

APPENDIX

B

Math symbol tables

B.1 Hebrew and Greek letters

Hebrew letters

Type	Typeset
`\aleph`	ℵ
`\beth`	ℶ
`\daleth`	ℸ
`\gimel`	ℷ

Greek letters

Lowercase

Type	Typeset	Type	Typeset	Type	Typeset
`\alpha`	α	`\iota`	ι	`\sigma`	σ
`\beta`	β	`\kappa`	κ	`\tau`	τ
`\gamma`	γ	`\lambda`	λ	`\upsilon`	υ
`\delta`	δ	`\mu`	μ	`\phi`	ϕ
`\epsilon`	ϵ	`\nu`	ν	`\chi`	χ
`\zeta`	ζ	`\xi`	ξ	`\psi`	ψ
`\eta`	η	`\pi`	π	`\omega`	ω
`\theta`	θ	`\rho`	ρ		
`\varepsilon`	ε	`\varpi`	ϖ	`\varsigma`	ς
`\vartheta`	ϑ	`\varrho`	ϱ	`\varphi`	φ
	`\digamma`	$\digamma$	`\varkappa`	$\varkappa$	

Uppercase

Type	Typeset	Type	Typeset	Type	Typeset
`\Gamma`	Γ	`\Xi`	Ξ	`\Phi`	Φ
`\Delta`	Δ	`\Pi`	Π	`\Psi`	Ψ
`\Theta`	Θ	`\Sigma`	Σ	`\Omega`	Ω
`\Lambda`	Λ	`\Upsilon`	Υ		
`\varGamma`	$\varGamma$	`\varXi`	$\varXi$	`\varPhi`	$\varPhi$
`\varDelta`	$\varDelta$	`\varPi`	$\varPi$	`\varPsi`	$\varPsi$
`\varTheta`	$\varTheta$	`\varSigma`	$\varSigma$	`\varOmega`	$\varOmega$
`\varLambda`	$\varLambda$	`\varUpsilon`	$\varUpsilon$		

B.2 Binary relations

Type	Typeset	Type	Typeset
`<`	$<$	`>`	$>$
`=`	$=$	`:`	$:$
`\in`	$\in$	`\ni` or `\owns`	$\ni$
`\leq` or `\le`	$\leq$	`\geq` or `\ge`	$\geq$
`\ll`	$\ll$	`\gg`	$\gg$
`\prec`	$\prec$	`\succ`	$\succ$
`\preceq`	$\preceq$	`\succeq`	$\succeq$
`\sim`	$\sim$	`\approx`	$\approx$
`\simeq`	$\simeq$	`\cong`	$\cong$
`\equiv`	$\equiv$	`\doteq`	$\doteq$
`\subset`	$\subset$	`\supset`	$\supset$
`\subseteq`	$\subseteq$	`\supseteq`	$\supseteq$
`\sqsubseteq`	$\sqsubseteq$	`\sqsupseteq`	$\sqsupseteq$
`\smile`	$\smile$	`\frown`	$\frown$
`\perp`	$\perp$	`\models`	$\models$
`\mid`	$\mid$	`\parallel`	$\parallel$
`\vdash`	$\vdash$	`\dashv`	$\dashv$
`\propto`	$\propto$	`\asymp`	$\asymp$
`\bowtie`	$\bowtie$		
`\sqsubset`	$\sqsubset$	`\sqsupset`	$\sqsupset$
`\Join`	$\Join$		

Note the `\colon` command used in $f : x \to x^2$, typed as

```
f \colon x \to x^2
```

More binary relations

Type	Typeset	Type	Typeset
`\leqq`	$\leqq$	`\geqq`	$\geqq$
`\leqslant`	$\leqslant$	`\geqslant`	$\geqslant$
`\eqslantless`	$\eqslantless$	`\eqslantgtr`	$\eqslantgtr$
`\lesssim`	$\lesssim$	`\gtrsim`	$\gtrsim$
`\lessapprox`	$\lessapprox$	`\gtrapprox`	$\gtrapprox$
`\approxeq`	$\approxeq$		
`\lessdot`	$\lessdot$	`\gtrdot`	$\gtrdot$
`\lll`	$\lll$	`\ggg`	$\ggg$
`\lessgtr`	$\lessgtr$	`\gtrless`	$\gtrless$
`\lesseqgtr`	$\lesseqgtr$	`\gtreqless`	$\gtreqless$
`\lesseqqgtr`	$\lesseqqgtr$	`\gtreqqless`	$\gtreqqless$
`\doteqdot`	$\doteqdot$	`\eqcirc`	$\eqcirc$
`\circeq`	$\circeq$	`\triangleq`	$\triangleq$
`\risingdotseq`	$\risingdotseq$	`\fallingdotseq`	$\fallingdotseq$
`\backsim`	$\backsim$	`\thicksim`	$\thicksim$
`\backsimeq`	$\backsimeq$	`\thickapprox`	$\thickapprox$
`\preccurlyeq`	$\preccurlyeq$	`\succcurlyeq`	$\succcurlyeq$
`\curlyeqprec`	$\curlyeqprec$	`\curlyeqsucc`	$\curlyeqsucc$
`\precsim`	$\precsim$	`\succsim`	$\succsim$
`\precapprox`	$\precapprox$	`\succapprox`	$\succapprox$
`\subseteqq`	$\subseteqq$	`\supseteqq`	$\supseteqq$
`\Subset`	$\Subset$	`\Supset`	$\Supset$
`\vartriangleleft`	$\vartriangleleft$	`\vartriangleright`	$\vartriangleright$
`\trianglelefteq`	$\trianglelefteq$	`\trianglerighteq`	$\trianglerighteq$
`\vDash`	$\vDash$	`\Vdash`	$\Vdash$
`\Vvdash`	$\Vvdash$		
`\smallsmile`	$\smallsmile$	`\smallfrown`	$\smallfrown$
`\shortmid`	$\shortmid$	`\shortparallel`	$\shortparallel$
`\bumpeq`	$\bumpeq$	`\Bumpeq`	$\Bumpeq$
`\between`	$\between$	`\pitchfork`	$\pitchfork$
`\varpropto`	$\varpropto$	`\backepsilon`	$\backepsilon$
`\blacktriangleleft`	$\blacktriangleleft$	`\blacktriangleright`	$\blacktriangleright$
`\therefore`	$\therefore$	`\because`	$\because$

Negated binary relations

Type	Typeset	Type	Typeset
\neq or \ne	$\neq$	\notin	$\notin$
\nless	$\nless$	\ngtr	$\ngtr$
\nleq	$\nleq$	\ngeq	$\ngeq$
\nleqslant	$\nleqslant$	\ngeqslant	$\ngeqslant$
\nleqq	$\nleqq$	\ngeqq	$\ngeqq$
\lneq	$\lneq$	\gneq	$\gneq$
\lneqq	$\lneqq$	\gneqq	$\gneqq$
\lvertneqq	$\lvertneqq$	\gvertneqq	$\gvertneqq$
\lnsim	$\lnsim$	\gnsim	$\gnsim$
\lnapprox	$\lnapprox$	\gnapprox	$\gnapprox$
\nprec	$\nprec$	\nsucc	$\nsucc$
\npreceq	$\npreceq$	\nsucceq	$\nsucceq$
\precneqq	$\precneqq$	\succneqq	$\succneqq$
\precnsim	$\precnsim$	\succnsim	$\succnsim$
\precnapprox	$\precnapprox$	\succnapprox	$\succnapprox$
\nsim	$\nsim$	\ncong	$\ncong$
\nshortmid	$\nshortmid$	\nshortparallel	$\nshortparallel$
\nmid	$\nmid$	\nparallel	$\nparallel$
\nvdash	$\nvdash$	\nvDash	$\nvDash$
\nVdash	$\nVdash$	\nVDash	$\nVDash$
\ntriangleleft	$\ntriangleleft$	\ntriangleright	$\ntriangleright$
\ntrianglelefteq	$\ntrianglelefteq$	\ntrianglerighteq	$\ntrianglerighteq$
\nsubseteq	$\nsubseteq$	\nsupseteq	$\nsupseteq$
\nsubseteqq	$\nsubseteqq$	\nsupseteqq	$\nsupseteqq$
\subsetneq	$\subsetneq$	\supsetneq	$\supsetneq$
\varsubsetneq	$\varsubsetneq$	\varsupsetneq	$\varsupsetneq$
\subsetneqq	$\subsetneqq$	\supsetneqq	$\supsetneqq$
\varsubsetneqq	$\varsubsetneqq$	\varsupsetneqq	$\varsupsetneqq$

B.3 Binary operations

Type	Typeset	Type	Typeset
`+`	$+$	`-`	$-$
`\pm`	$\pm$	`\mp`	$\mp$
`\times`	$\times$	`\cdot`	$\cdot$
`\circ`	$\circ$	`\bigcirc`	$\bigcirc$
`\div`	$\div$	`\bmod`	$\bmod$
`\cap`	$\cap$	`\cup`	$\cup$
`\sqcap`	$\sqcap$	`\sqcup`	$\sqcup$
`\wedge` or `\land`	$\wedge$	`\vee` or `\lor`	$\vee$
`\triangleleft`	$\triangleleft$	`\triangleright`	$\triangleright$
`\bigtriangleup`	$\bigtriangleup$	`\bigtriangledown`	$\bigtriangledown$
`\oplus`	$\oplus$	`\ominus`	$\ominus$
`\otimes`	$\otimes$	`\oslash`	$\oslash$
`\odot`	$\odot$	`\bullet`	$\bullet$
`\dagger`	$\dagger$	`\ddagger`	$\ddagger$
`\setminus`	$\setminus$	`\smallsetminus`	$\smallsetminus$
`\wr`	$\wr$	`\amalg`	$\amalg$
`\ast`	$\ast$	`\star`	$\star$
`\diamond`	$\diamond$		
`\lhd`	$\lhd$	`\rhd`	$\rhd$
`\unlhd`	$\unlhd$	`\unrhd`	$\unrhd$
`\dotplus`	$\dotplus$	`\centerdot`	$\centerdot$
`\ltimes`	$\ltimes$	`\rtimes`	$\rtimes$
`\leftthreetimes`	$\leftthreetimes$	`\rightthreetimes`	$\rightthreetimes$
`\circleddash`	$\circleddash$	`\uplus`	$\uplus$
`\barwedge`	$\barwedge$	`\doublebarwedge`	$\doublebarwedge$
`\curlywedge`	$\curlywedge$	`\curlyvee`	$\curlyvee$
`\veebar`	$\veebar$	`\intercal`	$\intercal$
`\doublecap` or `\Cap`	$\Cap$	`\doublecup` or `\Cup`	$\Cup$
`\circledast`	$\circledast$	`\circledcirc`	$\circledcirc$
`\boxminus`	$\boxminus$	`\boxtimes`	$\boxtimes$
`\boxdot`	$\boxdot$	`\boxplus`	$\boxplus$
`\divideontimes`	$\divideontimes$	`\vartriangle`	$\vartriangle$
`\And`	$\And$		

B.4 Arrows

Type	Typeset	Type	Typeset
`\leftarrow`	$\leftarrow$	`\rightarrow` or `\to`	$\rightarrow$
`\longleftarrow`	$\longleftarrow$	`\longrightarrow`	$\longrightarrow$
`\Leftarrow`	$\Leftarrow$	`\Rightarrow`	$\Rightarrow$
`\Longleftarrow`	$\Longleftarrow$	`\Longrightarrow`	$\Longrightarrow$
`\leftrightarrow`	$\leftrightarrow$	`\longleftrightarrow`	$\longleftrightarrow$
`\Leftrightarrow`	$\Leftrightarrow$	`\Longleftrightarrow`	$\Longleftrightarrow$
`\uparrow`	$\uparrow$	`\downarrow`	$\downarrow$
`\Uparrow`	$\Uparrow$	`\Downarrow`	$\Downarrow$
`\updownarrow`	$\updownarrow$	`\Updownarrow`	$\Updownarrow$
`\nearrow`	$\nearrow$	`\searrow`	$\searrow$
`\swarrow`	$\swarrow$	`\nwarrow`	$\nwarrow$
`\iff`	$\iff$	`\mapstochar`	$\mapstochar$
`\mapsto`	$\mapsto$	`\longmapsto`	$\longmapsto$
`\hookleftarrow`	$\hookleftarrow$	`\hookrightarrow`	$\hookrightarrow$
`\leftharpoonup`	$\leftharpoonup$	`\rightharpoonup`	$\rightharpoonup$
`\leftharpoondown`	$\leftharpoondown$	`\rightharpoondown`	$\rightharpoondown$
`\leadsto`	$\leadsto$		
`\leftleftarrows`	$\leftleftarrows$	`\rightrightarrows`	$\rightrightarrows$
`\leftrightarrows`	$\leftrightarrows$	`\rightleftarrows`	$\rightleftarrows$
`\Lleftarrow`	$\Lleftarrow$	`\Rrightarrow`	$\Rrightarrow$
`\twoheadleftarrow`	$\twoheadleftarrow$	`\twoheadrightarrow`	$\twoheadrightarrow$
`\leftarrowtail`	$\leftarrowtail$	`\rightarrowtail`	$\rightarrowtail$
`\looparrowleft`	$\looparrowleft$	`\looparrowright`	$\looparrowright$
`\upuparrows`	$\upuparrows$	`\downdownarrows`	$\downdownarrows$
`\upharpoonleft`	$\upharpoonleft$	`\upharpoonright`	$\upharpoonright$
`\downharpoonleft`	$\downharpoonleft$	`\downharpoonright`	$\downharpoonright$
`\leftrightsquigarrow`	$\leftrightsquigarrow$	`\rightsquigarrow`	$\rightsquigarrow$
`\multimap`	$\multimap$		
`\nleftarrow`	$\nleftarrow$	`\nrightarrow`	$\nrightarrow$
`\nLeftarrow`	$\nLeftarrow$	`\nRightarrow`	$\nRightarrow$
`\nleftrightarrow`	$\nleftrightarrow$	`\nLeftrightarrow`	$\nLeftrightarrow$
`\dashleftarrow`	$\dashleftarrow$	`\dashrightarrow`	$\dashrightarrow$
`\curvearrowleft`	$\curvearrowleft$	`\curvearrowright`	$\curvearrowright$
`\circlearrowleft`	$\circlearrowleft$	`\circlearrowright`	$\circlearrowright$
`\leftrightharpoons`	$\leftrightharpoons$	`\rightleftharpoons`	$\rightleftharpoons$
`\Lsh`	$\Lsh$	`\Rsh`	$\Rsh$

B.5 Miscellaneous symbols

Type	Typeset	Type	Typeset
\hbar	$\hbar$	\ell	ℓ
\imath	$\imath$	\jmath	$\jmath$
\wp	$\wp$	\partial	∂
\Im	$\Im$	\Re	$\Re$
\infty	∞	\prime	$\prime$
\emptyset	$\emptyset$	\varnothing	$\varnothing$
\forall	$\forall$	\exists	$\exists$
\smallint	$\smallint$	\triangle	$\triangle$
\top	$\top$	\bot	$\bot$
\P	$\P$	\S	$\S$
\dag	$\dagger$	\ddag	$\ddagger$
\flat	$\flat$	\natural	$\natural$
\sharp	$\sharp$	\angle	$\angle$
\clubsuit	$\clubsuit$	\diamondsuit	$\diamondsuit$
\heartsuit	$\heartsuit$	\spadesuit	$\spadesuit$
\surd	$\surd$	\nabla	∇
\pounds	$\pounds$	\neg or \lnot	$\neg$
\Box	$\Box$	\Diamond	$\Diamond$
\mho	$\mho$		
\hslash	$\hslash$	\complement	$\complement$
\backprime	$\backprime$	\nexists	$\nexists$
\Bbbk	$\Bbbk$		
\diagup	$\diagup$	\diagdown	$\diagdown$
\blacktriangle	$\blacktriangle$	\blacktriangledown	$\blacktriangledown$
\triangledown	$\triangledown$	\eth	$\eth$
\square	$\square$	\blacksquare	$\blacksquare$
\lozenge	$\lozenge$	\blacklozenge	$\blacklozenge$
\measuredangle	$\measuredangle$	\sphericalangle	$\sphericalangle$
\circledS	$\circledS$	\bigstar	$\bigstar$
\Finv	$\Finv$	\Game	$\Game$

B.6 Delimiters

Name	Type	Typeset
left parenthesis	`(`	(
right parenthesis	`)`	)
left bracket	`[` or `\lbrack`	[
right bracket	`]` or `\rbrack`	]
left brace	`\{` or `\lbrace`	{
right brace	`\}` or `\rbrace`	}
backslash	`\backslash`	\
forward slash	`/`	/
left angle bracket	`\langle`	⟨
right angle bracket	`\rangle`	⟩
vertical line	`|` or `\vert`	|
double vertical line	`\\|` or `\Vert`	‖
left floor	`\lfloor`	⌊
right floor	`\rfloor`	⌋
left ceiling	`\lceil`	⌈
right ceiling	`\rceil`	⌉
upward	`\uparrow`	↑
double upward	`\Uparrow`	⇑
downward	`\downarrow`	↓
double downward	`\Downarrow`	⇓
up-and-down	`\updownarrow`	↕
double up-and-down	`\Updownarrow`	⇕
upper-left corner	`\ulcorner`	⌜
upper-right corner	`\urcorner`	⌝
lower-left corner	`\llcorner`	⌞
lower-right corner	`\lrcorner`	⌟

B.7 Operators

"Pure" operators, with no limits

Type	Typeset	Type	Typeset	Type	Typeset	Type	Typeset
`\arccos`	arccos	`\cot`	cot	`\hom`	hom	`\sin`	sin
`\arcsin`	arcsin	`\coth`	coth	`\ker`	ker	`\sinh`	sinh
`\arctan`	arctan	`\csc`	csc	`\lg`	lg	`\tan`	tan
`\arg`	arg	`\deg`	deg	`\ln`	ln	`\tanh`	tanh
`\cos`	cos	`\dim`	dim	`\log`	log		
`\cosh`	cosh	`\exp`	exp	`\sec`	sec		

Operators with limits

Type	Typeset	Type	Typeset
`\det`	det	`\limsup`	lim sup
`\gcd`	gcd	`\max`	max
`\inf`	inf	`\min`	min
`\lim`	lim	`\Pr`	Pr
`\liminf`	lim inf	`\sup`	sup
`\injlim`	inj lim	`\projlim`	proj lim
`\varliminf`	$\underline{\lim}$	`\varlimsup`	$\overline{\lim}$
`\varinjlim`	$\varinjlim$	`\varprojlim`	$\varprojlim$

B.7.1 Large operators

Type	Inline	Displayed
`\int_{a}^{b}`	$\int_a^b$	$\displaystyle\int_a^b$
`\oint_{a}^{b}`	$\oint_a^b$	$\displaystyle\oint_a^b$
`\iint_{a}^{b}`	$\iint_a^b$	$\displaystyle\iint_a^b$
`\iiint_{a}^{b}`	$\iiint_a^b$	$\displaystyle\iiint_a^b$
`\iiiint_{a}^{b}`	$\iiiint_a^b$	$\displaystyle\iiiint_a^b$
`\idotsint_{a}^{b}`	$\int\cdots\int_a^b$	$\displaystyle\int\cdots\int_a^b$
`\prod_{i=1}^{n}`	$\prod_{i=1}^{n}$	$\displaystyle\prod_{i=1}^{n}$
`\coprod_{i=1}^{n}`	$\coprod_{i=1}^{n}$	$\displaystyle\coprod_{i=1}^{n}$
`\bigcap_{i=1}^{n}`	$\bigcap_{i=1}^{n}$	$\displaystyle\bigcap_{i=1}^{n}$
`\bigcup_{i=1}^{n}`	$\bigcup_{i=1}^{n}$	$\displaystyle\bigcup_{i=1}^{n}$
`\bigwedge_{i=1}^{n}`	$\bigwedge_{i=1}^{n}$	$\displaystyle\bigwedge_{i=1}^{n}$
`\bigvee_{i=1}^{n}`	$\bigvee_{i=1}^{n}$	$\displaystyle\bigvee_{i=1}^{n}$
`\bigsqcup_{i=1}^{n}`	$\bigsqcup_{i=1}^{n}$	$\displaystyle\bigsqcup_{i=1}^{n}$
`\biguplus_{i=1}^{n}`	$\biguplus_{i=1}^{n}$	$\displaystyle\biguplus_{i=1}^{n}$
`\bigotimes_{i=1}^{n}`	$\bigotimes_{i=1}^{n}$	$\displaystyle\bigotimes_{i=1}^{n}$
`\bigoplus_{i=1}^{n}`	$\bigoplus_{i=1}^{n}$	$\displaystyle\bigoplus_{i=1}^{n}$
`\bigodot_{i=1}^{n}`	$\bigodot_{i=1}^{n}$	$\displaystyle\bigodot_{i=1}^{n}$
`\sum_{i=1}^{n}`	$\sum_{i=1}^{n}$	$\displaystyle\sum_{i=1}^{n}$

B.8 Math accents and fonts

Math accents

		amsxtra	
Type	Typeset	Type	Typeset
`\acute{a}`	$\acute{a}$		
`\bar{a}`	$\bar{a}$		
`\breve{a}`	$\breve{a}$	`\spbreve`	$\breve{}$
`\check{a}`	$\check{a}$	`\spcheck`	$\check{}$
`\dot{a}`	$\dot{a}$	`\spdot`	$\dot{}$
`\ddot{a}`	$\ddot{a}$	`\spddot`	$\ddot{}$
`\dddot{a}`	$\dddot{a}$	`\spdddot`	$\dddot{}$
`\ddddot{a}`	$\ddddot{a}$		
`\grave{a}`	$\grave{a}$		
`\hat{a}`	$\hat{a}$		
`\widehat{a}`	$\widehat{a}$	`\sphat`	$\widehat{}$
`\mathring{a}`	$\mathring{a}$		
`\tilde{a}`	$\tilde{a}$		
`\widetilde{a}`	$\widetilde{a}$	`\sptilde`	$\widetilde{}$
`\vec{a}`	$\vec{a}$		

Math fonts

Type	Typeset
LaTeX	
`\mathbf{A}`	$\mathbf{A}$
`\mathcal{A}`	$\mathcal{A}$
`\mathit{A}`	A
`\mathnormal{A}`	$\mathnormal{A}$
`\mathrm{A}`	A
`\mathsf{A}`	A
`\mathtt{A}`	$\mathtt{A}$
`\boldsymbol{\alpha}`	$\boldsymbol{\alpha}$
`\mathbb{A}`	$\mathbb{A}$
`\mathfrak{A}`	$\mathfrak{A}$
`\mathscr{a}`	$\mathscr{A}$

`\mathscr` requires the `eucal` package with the `mathscr` option

B.9 Math spacing commands

Name	Width	Short	Long
1 mu (math unit)		`\mspace{1mu}`	
thinspace		`\,`	`\thinspace`
medspace		`\:`	`\medspace`
thickspace		`\;`	`\thickspace`
interword space		`\␣`	
1 em			`\quad`
2 em			`\qquad`
Negative space			
1 mu			`\mspace{-1mu}`
thinspace		`\!`	`\negthinspace`
medspace			`\negmedspace`
thickspace			`\negthickspace`

APPENDIX

C

Text symbol tables

C.1 Some European characters

Name	Type	Typeset	Type	Typeset
a-ring	`\aa`	å	`\AA`	Å
aesc	`\ae`	æ	`\AE`	Æ
ethel	`\oe`	œ	`\OE`	Œ
eszett	`\ss`	ß	`\SS`	SS
inverted question mark	`?‘`	¿		
inverted exclamation mark	`!‘`	¡		
slashed L	`\l`	ł	`\L`	Ł
slashed O	`\o`	ø	`\O`	Ø

C.2 Text accents

Name	Type	Typeset	Name	Type	Typeset
acute	`\'{o}`	ó	macron	`\={o}`	ō
breve	`\u{o}`	ŏ	overdot	`\.{g}`	ġ
caron/haček	`\v{o}`	ǒ	ring	`\r{u}`	ů
cedilla	`\c{c}`	ç	tie	`\t{oo}`	o͡o
circumflex	`\^{o}`	ô	tilde	`\~{n}`	ñ
dieresis/umlaut	`\"{u}`	ü	underdot	`\d{m}`	ṃ
double acute	`\H{o}`	ő	underbar	`\b{o}`	o̲
grave	`\‘{o}`	ò			
dotless i	`\i`	ı	dotless j	`\j`	ȷ
	`\'{\i}`	í		`\v{\j}`	ǰ

C.3 Text font commands

C.3.1 Text font family commands

Command with Argument	Command Declaration	Switches to the font family
`\textnormal{...}`	`{\normalfont ...}`	document
`\emph{...}`	`{\em ...}`	*emphasis*
`\textrm{...}`	`{\rmfamily ...}`	roman
`\textsf{...}`	`{\sffamily ...}`	sans serif
`\texttt{...}`	`{\ttfamily ...}`	`typewriter style`
`\textup{...}`	`{\upshape ...}`	upright shape
`\textit{...}`	`{\itshape ...}`	*italic shape*
`\textsl{...}`	`{\slshape ...}`	*slanted shape*
`\textsc{...}`	`{\scshape ...}`	SMALL CAPITALS
`\textbf{...}`	`{\bfseries ...}`	**bold**
`\textmd{...}`	`{\mdseries ...}`	normal weight and width

C.3.2 Text font size changes

Command	LaTeX sample text	AMS sample text
`\Tiny`	[not available]	sample text
`\tiny`	sample text	sample text
`\SMALL` or `\scriptsize`	sample text	sample text
`\Small` or `\footnotesize`	sample text	sample text
`\small`	sample text	sample text
`\normalsize`	sample text	sample text
`\large`	sample text	sample text
`\Large`	sample text	sample text
`\LARGE`	sample text	sample text
`\huge`	sample text	sample text
`\Huge`	sample text	sample text

C.4 Additional text symbols

Name	Type	Typeset
ampersand	`\&`	&
asterisk bullet	`\textasteriskcentered`	*
backslash	`\textbackslash`	\
bar (caesura)	`\textbar`	|
brace left	`\{`	{
brace right	`\}`	}
bullet	`\textbullet`	•
circled a	`\textcircled{a}`	ⓐ
circumflex	`\textasciicircum`	^
copyright	`\copyright`	©
dagger	`\dag`	†
double dagger (diesis)	`\ddag`	‡
dollar	`\$`	$
double quotation left	`\textquotedblleft` or ‘‘	“
double quotation right	`\textquotedblright` or ’’	”
em dash	`\textemdash` or `---`	—
en dash	`\textendash` or `--`	–
exclamation down	`\textexclamdown` or `!‘`	¡
greater than	`\textgreater`	>
less than	`\textless`	<
lowline	`\_`	_
midpoint	`\textperiodcentered`	·
octothorp	`\#`	#
percent	`\%`	%
pilcrow (paragraph)	`\P`	¶
question down	`\textquestiondown` or `?‘`	¿
registered trademark	`\textregistered`	®
section	`\S`	§

Additional text symbols, *continued*

Name	Type	Typeset
single quote left	`\textquoteleft` or ‘	‘
single quote right	`\textquoteright` or ’	’
sterling	`\pounds`	£
superscript	`\textsuperscript{a}`	a
tilde	`\textasciitilde`	~
trademark	`\texttrademark`	TM
visible space	`\textvisiblespace`	␣

For the `\textsubscript` command, see Section 12.3.

C.5 Additional text symbols with T1 encoding

An accent

Name	Type	Typeset
Ogonek	`\k{e}`	ę

European characters

Name	Type	Typeset	Type	Typeset
Eth	`\dh`	ð	`\DH`	Ð
Dyet	`\dj`	đ	`\DJ`	Đ
Eng	`\ng`	ŋ	`\NG`	Ŋ
Thorn	`\th`	þ	`\TH`	Þ

Quotation marks

Name	Type	Typeset	Type	Typeset
Single Guillemet	`\guilsinglleft`	‹	`\guilsinglright`	›
Double Guillemet	`\guillemotleft`	«	`\guillemotright`	»
Single Quotation	`\quotesinglbase`	‚	`\textquoteright`	’
Double Quotation	`\quotedblbase`	„	`\textquotedbl`	"

C.6 Text spacing commands

Name	Width	Short command	Long command
Positive Space			
Normal	varies	␣	
Intersentence	varies	\@.␣	
Interword	varies	\␣	
Italic Corr.	varies	\/␣	
Tie	varies	~	
Thinspace	▯	\,	\thinspace
Medspace	▯	\:	\medspace
Thickspace	▯	\;	\thickspace
1 em	⌊⌋		\quad
2 em	⌊——⌋		\qquad
Negative Space			
Thinspace	▯	\!	\negthinspace
Medspace	▯		\negmedspace
Thickspace	▯		\negthickspace

APPENDIX

D

Some background

In this book we define LaTeX as the foundation TeX, the work platform LaTeX, and the superstructure AMS packages rolled into one. While you do not need to know anything about LaTeX's detailed structure and history to use it, such knowledge may help you understand how and why LaTeX works the way it does.

In Section D.1, we present a short history of LaTeX, where it has come from and where it is going. Section D.2 provides a description of the structure of LaTeX. Appendix D.3 provides a description of how LaTeX works. In Appendix D.4, the various prompts are defined and Appendix D.5 discusses the separation of visual and logical design elements.

D.1 A short history

D.1.1 TeX

Donald E. Knuth's multivolume work, *The Art of Computer Programming* [37], caused its author a great deal of frustration because it was very difficult to keep the volumes typographically uniform. To solve this problem, Knuth decided to create his own typesetting language. The result is described in *The TeXbook* [38].

A mathematical typesetting language takes care of the multitude of details that are so important in mathematical typesetting, including

- Spacing formulas properly
- Breaking text into pleasingly typeset lines and paragraphs
- Hyphenating words where necessary
- Providing hundreds of symbols for typesetting mathematics

LaTeX does all this and more on almost any computer: PC, Mac, UNIX, workstation, or mainframe. You can write your document on a PC and e-mail it to a coworker who makes corrections on a Mac. The final manuscript might be sent to a publisher who uses a UNIX computer to prepare the document for printing.

Knuth realized that typesetting is only half the solution to the manuscript production problem. You also need a style designer—a specialist who determines what fonts to use, how large a vertical space to put before and after a theorem, and numerous other design issues.

D.1.2 LaTeX 2.09 and AMS-TeX

Knuth also realized that typesetting a complex document in TeX requires a very knowledgeable user. So TeX was designed as a platform on which *convenient work environments*—macro packages—could be built, more suitable for the average user to work with. It is somewhat unfortunate that *two* such platforms were made available to the mathematical community in the early 1980s, AMS-TeX and LaTeX.

AMS-TeX was written by Michael D. Spivak for the American Mathematical Society, whereas LaTeX was developed by Leslie Lamport. The strengths of the two systems were somewhat complementary. AMS-TeX provided many features needed by mathematical articles, including

- Sophisticated math typesetting capabilities
- Extensive options for formatting multiline formulas
- Flexible bibliographic references

LaTeX also provided many features, including

- The use of logical units to separate the logical and the visual design of an article
- Automatic numbering and cross-referencing
- Bibliographic databases

Both AMS-TeX and LaTeX became very popular, causing a split in the mathematical community as some chose one system over the other.

D.1.3 LaTeX3

When Lamport decided not to develop LaTeX any further, the LaTeX3 *team*[1] took over with the aim of actively supporting, maintaining, and updating LaTeX.

The goals for LaTeX3 are very ambitious. LaTeX3 will

- Provide high-quality typesetting for a wide variety of document types and typographic requirements
- Support direct formatting commands for editors and designers, which are essential to the fine-tuning of document layout and page design
- Process complex structured documents and support a document syntax that allows automatic translation of documents conforming to the international document-type definition standard SGML (Standard Generalized Markup Language, ISO 8879)
- Provide a common foundation for a number of incompatible LaTeX variants that have been developed, including the old LaTeX 2.09, LaTeX with the New Font Selection Scheme, and $\mathcal{A}_{\mathcal{M}}\mathcal{S}$-LaTeX

See two articles by Frank Mittelbach and Chris Rowley, *LaTeX 2.09 → LaTeX3* [47], 1992, and *The LaTeX3 Project* [49], 1994, for a statement of goals. Go to `The LaTeX3 project` at

`http://www.latex-project.org/latex3.html`

for more up-to-date articles and reports.

A number of LaTeX3 projects have already been completed and are part of LaTeX, including:

The New Font Selection Scheme LaTeX uses Knuth's Computer Modern fonts. The New Font Selection Scheme, NFSS, of Frank Mittelbach and Rainer Schöpf, written in 1989, allows the *independent changing* of font attributes and the integration of new font families into LaTeX. With the proliferation of PostScript fonts and printers, more and more users want to use PostScript fonts in their LaTeX documents.

New and improved environments Frank Mittelbach wrote a new multicolumn environment and Rainer Schöpf improved the `verbatim` and `comment` environments. There have also been several improvements made to the `tabular` and `array` environments. The extremely important `graphicx` package by David Carlisle and Sebastian Rahtz was released.

[1] A talented group of mathematicians and programmers, Frank Mittelbach, Chris Rowley, and Rainer Schöpf. The group has since expanded with the addition of Johannes Braams, David Carlisle, Michael Downes, Denys Duchier, Robin Fairbairns, Alan Jeffrey, and Martin Schröder; many volunteers have also contributed to the project. The current LaTeX3 project team personnel are: Johannes Braams, David Carlisle, Robin Fairbairns, Frank Mittelbach, Chris Rowley, Rainer Schöpf, Thomas Lotze, Morten Høgholm, and Javier Bezos.

The first interim solution

In 1990, the AMS released $\mathcal{AMS}$-LaTeX, version 1.0—see Rainer Schöpf's *Foreword* to this book for a personal account. This release contained

- $\mathcal{AMS}$-TeX recoded to work with LaTeX
- The NFSS styles for proclamations
- The new `verbatim` environment

$\mathcal{AMS}$-LaTeX, version 1.0, is a LaTeX *dialect*. It was incompatible with the then current LaTeX—version 2.09.

While the LaTeX3 team wanted to unify the mathematical community, this first attempt by the AMS split it even further apart. Many $\mathcal{AMS}$-TeX users simply refused to switch. Even today, 17 years later, many mathematicians cling to $\mathcal{AMS}$-TeX. Even the LaTeX community was split into users of the old LaTeX, those whose LaTeX incorporated the NFSS, and $\mathcal{AMS}$-LaTeX users.

The second interim solution

When it became obvious that the goals of LaTeX3 could not be fulfilled any time soon, the LaTeX3 team decided to issue a new version of LaTeX, version 2e (also called LaTeX 2_ε) in June of 1994. This version replaced LaTeX 2.09, see the two Mittelbach and Rowley articles cited above. This interim release accomplished some of LaTeX3's goals, including the projects listed previously. Since then, LaTeX 2_ε (called LaTeX today) has become accepted as the standard LaTeX.

In February of 1995, the AMS released version 1.2 of $\mathcal{AMS}$-LaTeX (which I call the AMS packages in this book) built on top of the new LaTeX. Michael Downes was the project leader.

The changes in $\mathcal{AMS}$-LaTeX were substantial. The `align` environment, for example, was completely rewritten by David M. Jones. The recoded $\mathcal{AMS}$-TeX had now become a LaTeX package, `amsmath`.

It is extremely important to note that while $\mathcal{AMS}$-LaTeX 1.0 and 1.1 were monolithic structures, versions 1.2 and 2.0 (see Section D.1.4) are just collections of packages that fit nicely into the LaTeX model. You can use one AMS package or all, by themselves or mixed with other LaTeX packages. This book was typeset using the LaTeX document class (`book`) and the AMS packages, version 2.13, along with a number of other LaTeX (non-AMS) packages.

D.1.4 More recent developments

Since 1996, changes to LaTeX have been minor. A few new symbols have been added. Much work has been done on character encoding and LM (Latin Modern) fonts by

Bogusław Jackowski and Janusz M. Nowacki to extend LaTeX to languages other than American English (see Appendixes F and G).

In 1999, the American Mathematical Society released version 2.0 of the AMS packages and in 2004, version 2.2. About the same time, a consortium (made up of the AMS, Blue Sky Research, and Y&Y) released free PostScript versions of the CM and AMS fonts. These PostScript fonts are now part of any LaTeX distribution.

Interestingly, there are still those who argue that the AMS packages are not part and parcel of LaTeX and typesetting math. In life, almost everything is a compromise, in software design, even more so. Using the AMS packages to typeset math is an exception. It costs you nothing—if you do not need their features for a document, then you don't have to use them. You need not sacrifice anything in order to have the power of the AMS packages available when you need them. This is why, in this book, by LaTeX we mean LaTeX with the AMS packages.

D.2 Structure

LaTeX's core is a programming language called TeX, created by Donald E. Knuth, which provides low-level typesetting instructions. TeX comes with a set of fonts called *Computer Modern* (CM). The CM fonts and the TeX programming language form the foundation of a typical TeX system.

TeX is extensible—new commands can be defined in terms of more basic ones. LaTeX is one of the best known extensions of TeX.

The visual layout of a LaTeX document is primarily determined by the *document class*, such as `amsart`, `article` for articles, `amsbook`, `book` for books. Many journals, publishers, and schools have their own document classes for formatting articles, books, and theses.

Extensions of LaTeX are called *packages*. They provide additional functionality by adding new commands and environments, or by changing the way previously defined commands and environments work. It is essential that you find the packages that make your work easier. *The LaTeX Companion,* 2nd edition [46] discusses a large number of the most useful packages.

The structure of LaTeX is illustrated in Figure D.1. This figure suggests that in order to work with a LaTeX document, you first have to install TeX and the CM fonts, then LaTeX, and finally specify the document class and the necessary packages. The packages must include `amsmath`, `amsthm`, and so on. The AMSFonts font set is very useful, but not absolutely necessary. Of course, chances are that your LaTeX installation already includes all of these.

D.2.1 Using LaTeX

Figure D.2 on page 527 illustrates the steps in the production of a typeset document.

You start by opening an existing LaTeX source file or creating a new one with a

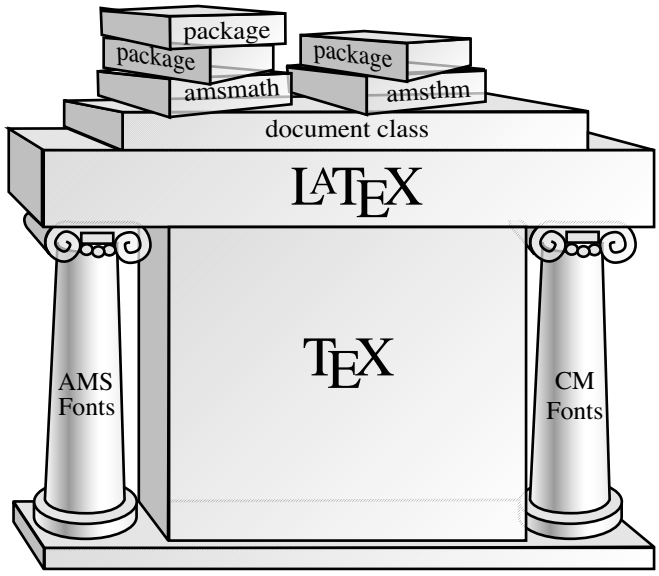

Figure D.1: The structure of LaTeX.

text editor. For this discussion, the source file is called `myart.tex`. Once the source file is ready, you typeset it. Depending on the document class options you choose and the packages the document loads, you end up with at least three additional files:

1. `myart.dvi` or `myart.pdf` The typeset article in machine-readable format—DVI stands for DeVice Independent—or in PDF format.

2. `myart.aux` The auxiliary file, used by LaTeX for internal bookkeeping, including cross-references and bibliographic citations.

3. `myart.log` The `log` file. LaTeX records the typesetting session in the `log` file, including any warnings and error messages that appear on your monitor in the `log` window.

Your computer uses a *video driver* to display the typeset article on your monitor and a *printer driver* to print the typeset article on a printer. The video and printer drivers are computer and LaTeX implementation dependent.

It should be emphasized that of the three applications used, only one is the same for all computers and all implementations.

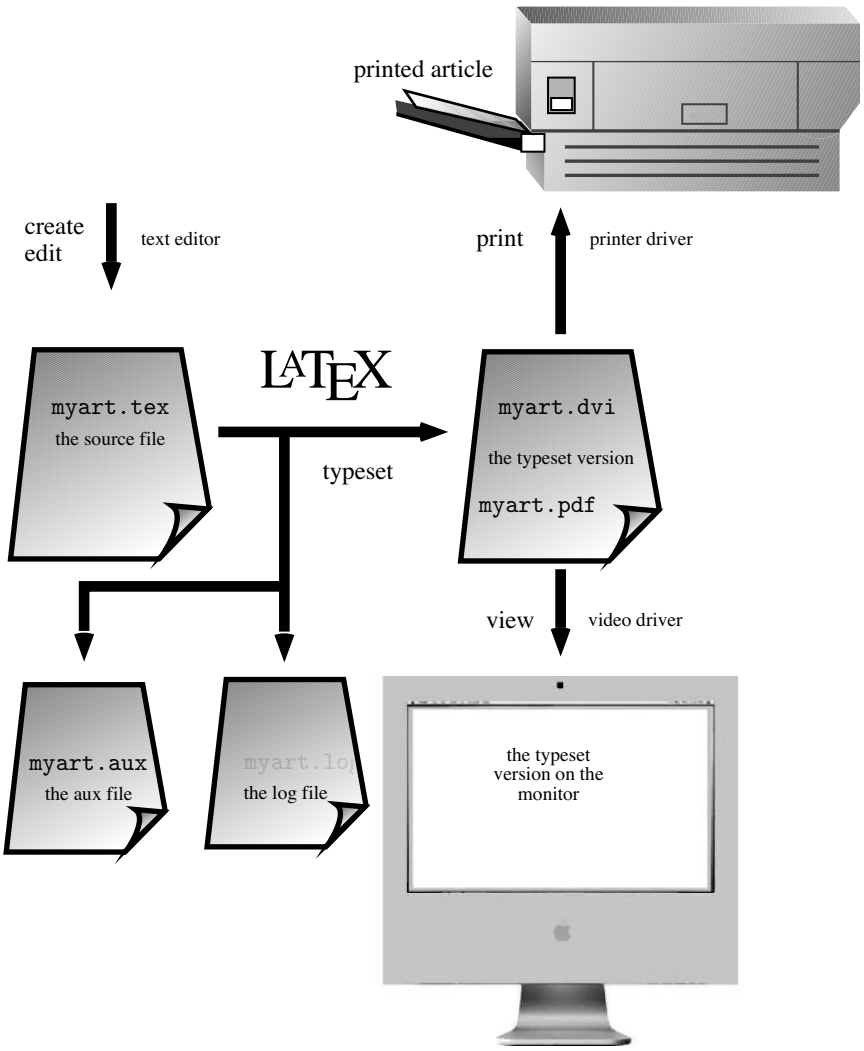

Figure D.2: Using LaTeX.

D.2.2 AMS packages revisited

The AMS enhancements to LaTeX fall into three groups: the AMS math enhancements, the document classes, and the AMSFonts. They consist of several packages.

An AMS document class automatically loads a number of AMS packages (see Section 11.6 for a more detailed discussion) including:

- `amsmath`, the main AMS math package
- `amsfonts`, commands for math alphabets
- `amsbsy`, bold symbol commands

The AMS document classes do not automatically load the `amssymb` package, which provides math symbol names. This package and other AMS or LaTeX packages can be loaded as needed.

D.3 How LaTeX works

In this section, I present a very simplified overview of the inner workings of LaTeX.

D.3.1 The layers

TeX and LaTeX consist of many layers. These include:

`virtex` TeX's core, containing about 350 primitive commands such as

```
input   accent   hsize
```

`virtex` can also read *format files,* which are precompiled sets of commands. LaTeX is nothing more than `virtex` reading in a large set of commands, built layer upon layer.

`plain.tex` The most basic layer built on `virtex`. It adds about 600 commands to `virtex`. When you invoke the `TeX` command, `virtex` loads the `plain` format, which is the default. The core TeX commands combined with the commands defined by the `plain` format are called Plain TeX.

Plain TeX is described in detail in Appendix B of Knuth's *The TeXbook* [38]. You can also read `plain.tex`, a text file in the LaTeX distribution. Plain TeX is powerful enough that you could do all your work in it. This approach is advocated by many, including Michael Doob in his book, TeX *Starting from* 1 [12].

`virtex` cannot build (compile) format files. For that you need another version of TeX called `initex`, which loads the most basic information a format needs, such as the hyphenation tables and `plain.tex`, and creates a format file.

LaTeX

LaTeX is a format file containing a compiled set of commands written by Leslie Lamport and others. It provides tools for logical document design, automatic numbering and cross-referencing, tables of contents, and many other features. The new LaTeX we are using is under the control of the LaTeX3 group.

Document classes

The document class forms the next layer. You may choose

- `amsart`, `amsbook`, or `amsproc`, provided by the AMS
- `article`, `book`, `letter`, `proc`, `report`, or `slides`, the legacy classes
- or any one of a large (and growing) number of other document classes provided by publishers of books and journals, universities, and other interested parties

Packages

The next layer is made up of the packages loaded by the document. You can use standard LaTeX packages, AMS packages, or any of hundreds of other packages in the LaTeX universe, mixed together as necessary. Any package may require other packages, or may automatically load other packages.

Documents

At the top of this hierarchy sit your documents, with their user-defined commands and environments, utilizing all the power derived from the layers below.

D.3.2 Typesetting

When typesetting, LaTeX uses two basic types of files, the source files and the font metric files.

A font metric file is designed to hold the information for a font of a given size and style. Each LaTeX font metric file, called a `tfm` file, contains the size of each character, the kerning (the space placed between two adjacent characters), the length of the italic correction, the size of the interword space, and so on. A typical `tfm` file is `cmr10.tfm`, which is the LaTeX font metric file for the font `cmr` (CM roman) at 10-point size.

LaTeX reads the source file one line at a time. It converts the characters of each line into a *token sequence*. A token is either a character—together with an indication of what role the character plays—or a command. The argument of a command is the token following it unless a group enclosed in braces follows it, in which case the contents of the group becomes the argument.[2] An example of this behavior can be seen when you

[2] Delimited commands work somewhat differently (see Section 15.1.8).

specify an exponent. LaTeX looks for the next token as the exponent unless a group enclosed in braces follows the `^` symbol. This explains why `$2^3$` and `$2^\alpha$` work, but `$2^\mathfrak{m}$` does not. Indeed, `3` and `\alpha` each become a single token but `\mathfrak{m}` becomes more than one, four, in fact. Of course, if you *always* use braces, as in

```
$ 2^{3}$, $2^{\alpha}$, $2^{ \mathfrak{m} }$
```

then you never have to think about tokens to type such expressions.

After tokenizing the text, LaTeX hyphenates it and attempts to split the paragraph into lines of the required width. The measurements of the characters—also called glyphs—are absolute, as are the distances between characters—called kerning. The spaces, interword space, intersentence space, and so on, are made of *glue* or rubber length (see Section 15.5.2). Glue has three parameters:

- the length of the space
- stretchability, the amount by which it can be made longer
- shrinkability, the amount by which it can be made shorter

LaTeX stretches and shrinks glue to form lines of equal length.

LaTeX employs a formula to measure how much stretching and shrinking is necessary in a line. The result is called badness. A badness of 0 is perfect, while a badness of 10,000 is very bad. Lines that are too wide are reported with messages such as

```
Overfull \hbox (5.61168pt too wide) in paragraph
                at lines 49--57
```

The badness of a line that is stretched too much is reported as follows:

```
Underfull \hbox (badness 1189) in paragraph
                at lines 93--93
```

Once enough paragraphs are put together, LaTeX composes a page from the typeset paragraphs using vertical glue. A short page generates a warning message such as

```
Underfull \vbox (badness 10000) has
occurred while \output is active
```

The typeset file is stored as a `dvi` (Device Independent) file or a PDF file.

D.3.3 Viewing and printing

Viewing and printing LaTeX's typeset output are not really part of LaTeX proper, but they are obviously an important part of your work environment. The printer driver prints the `dvi` and PDF files, and the video driver lets you view them on your monitor.

D.3.4 LaTeX's files

Auxiliary files

LaTeX is a *one-pass compiler,* that is, it reads the source file once only for typesetting. As a result, LaTeX must use auxiliary files to store information it generates during a run. For each typesetting run, LaTeX uses the auxiliary files compiled during the *previous* typesetting run. This mechanism explains why you have to typeset twice or more (see Section 18.2) to make sure that changes you have made to the source files are reflected in the typeset document. Such an auxiliary file has the same base name as the source file, the extension indicates its type.

The most important auxiliary file, the `aux` file, contains a great deal of information about the document, most importantly, the data needed for symbolic referencing. Here are two typical entries:

```
\newlabel{struct}{{5}{2}}
\bibcite{eM57a}{4}
```

The first entry indicates that a new symbolic reference was introduced on page 2 of the typeset document in Section 5 using the command

```
\label{struct}
```

The command `\ref{struct}` produces 5, while `\pageref{struct}` yields 2.

The second entry indicates that the bibliographic entry with label `eM57a` has been assigned the number 4, so `\cite{eM57a}` produces [4].

There is an `aux` file for the source file being processed, and another one for each file included in the main file by an `\include` command.

No auxiliary file is written if the `\nofiles` command is given. The message

```
No auxiliary output files.
```

in the `log` file reminds you that `\nofiles` is in effect.

The `log` file contains all the information shown in the `log` window during the typesetting. The `dvi` file contains the typeset version of the source file.

There are five auxiliary files that store information for special tasks. They are written only if that special task is invoked by a command and there is no `\nofiles` command. The additional auxiliary files are

`glo` Contains the glossary entries produced by `\glossary` commands. A new file is written only if there is a

```
\makeglossary
```

command in the source file (see Section 17.6).

`lof` Contains the entries used to compile a list of figures. A new file is written only if there is a

`\listoffigures`

command in the source file (see Section 10.4.3).

`lot` Contains the entries used to compile a list of tables. A new file is written only if there is a

`\listoftables`

command in the source file (see Section 10.4.3).

`toc` Contains the entries used to compile a table of contents. A new file is written only if there is a

`\tableofcontents`

command in the source file (see Section 18.2).

For information about the auxiliary files created by BibTeX and *MakeIndex,* see Sections 16.2.3 and 17.3, respectively. Some classes and packages create additional auxiliary files (see Section 13.2.3 for an example).

Versions

A complete LaTeX distribution consists of hundreds of files, all of which interact in some way. Since most of these files have had many revisions, you should make sure that they are all up-to-date and compatible with each other. You can check the version numbers and dates by reading the first few lines of each file in a text editor or by checking the dates and version numbers that are shown on the list created by the command `\listfiles`, which I discuss later in this section.

LaTeX has been updated every year. While writing this book, I used the version of LaTeX that was issued on December 1, 2005.

When you typeset a LaTeX document, LaTeX prints its release date in the `log` file with a line such as

```
LaTeX2e <2005/12/01>
```

If you use a LaTeX feature that was introduced recently, you can put a command such as the following into the preamble of your source file:

```
\NeedsTeXFormat{LaTeX2e}[2004/12/01]
```

This command specifies the date of the oldest version of LaTeX that may be used to typeset your file. If someone attempts to typeset your file with an older version, LaTeX generates a warning.

The AMS math package `amsmath` is at version 2.13, the document classes at version 2.26, and the AMSFonts set is at version 2.2d. See Section E.1 for more information on obtaining updated versions.

If you include the `\listfiles` command in the preamble of your document, the `log` file contains a detailed listing of all the files used in the typesetting of your document. Here are the first few (truncated) lines from such a listing:

```
*File List*
   book.cls    1999/01/07 v1.4a Standard LaTeX document class
  leqno.clo    1998/08/17 v1.1c Standard LaTeX option
                  (left equation numbers)
   bk10.clo    2005/09/16 v1.4f Standard LaTeX file
                  (size option)
MiL4.sty       2006/09/15 Commands for MiL4
amsmath.sty    2000/07/18 v2.13 AMS math features
amstext.sty    2000/06/29 v2.01
 amsgen.sty    1999/11/30 v2.0
 amsbsy.sty    1999/11/29 v1.2d
 amsopn.sty    1999/12/14 v2.01 operator names
 amsthm.sty    2004/08/06 v2.20
verbatim.sty   2003/08/22 v1.5q LaTeX2e package for
                  verbatim enhancements
amsxtra.sty    1999/11/15 v1.2c
  eucal.sty    2001/10/01 v2.2d Euler Script fonts
amssymb.sty    2002/01/22 v2.2d
amsfonts.sty   2001/10/25 v2.2f
omxcmex.fd    1999/05/25 v2.5h Standard LaTeX
                   font definitions
latexsym.sty   1998/08/17 v2.2e Standard LaTeX package
                   (lasy symbols)
  amscd.sty    1999/11/29 v1.2d
  alltt.sty    1997/06/16 v2.0g defines alltt environment
 xspace.sty    2006/02/12 v1.11 Space after command
                  names (DPC,MH)
graphicx.sty   1999/02/16 v1.0f Enhanced LaTeX Graphics
                   (DPC,SPQR)
 keyval.sty    1999/03/16 v1.13 key=value parser (DPC)
graphics.sty   2006/02/20 v1.0o Standard LaTeX Graphics
                   (DPC,SPQR)
   trig.sty    1999/03/16 v1.09 sin cos tan (DPC)
```

This list looks quite up-to-date (in fact, it is completely up-to-date). To confirm

this, open the file `alltt.sty` in the latest LaTeX distribution. You find the lines

```
\ProvidesPackage{alltt}
          [1997/06/16 v2.0g defines alltt environment]
```

that explain the date found in the listing.

D.4 Interactive LaTeX

If LaTeX cannot carry out your instructions, it displays a *prompt* and possibly an error message (see Section 4.3.1) in the `log` window.

- The `**` prompt means that LaTeX needs to know the name of a source file to typeset. This usually means that you misspelled a file name, you are trying to typeset a document that is not located in LaTeX's current folder, or that there is a space in the name of your source file.
- The `?` prompt indicates that LaTeX has found an error in your source file, and wants you to decide what to do next. You can try to continue typesetting the file by pressing
  - Return
  - `q` to typeset in quiet mode, not stopping for errors. Depending on the nature of the error, LaTeX may either recover or generate more error messages
  - `x` to stop typesetting your file
  - `h` to get advice on how to correct the error
- If you have misspelled the name of a package in a `\usepackage` command, or if LaTeX cannot find a file, it displays a message similar to the following:

  ```
  ! LaTeX Error: File ‘misspelled.sty’ not found.

  Type X to quit or <RETURN> to proceed,
  or enter new name. (Default extension: sty)

  Enter file name:
  ```

  You can either type the correct name of the file at the prompt, or type `x` to quit LaTeX.
- The `*` prompt signifies that LaTeX is in *interactive mode* and is waiting for instructions. To get such a prompt, comment out the line

  ```
  \end{document}
  ```

  in a source file, then typeset the file. Interactive instructions, such as `\show` and `\showthe` (see Section 15.1.7) may be given at the `*` prompt. To exit, type

```
\end{document}
```

at the * prompt, and press Return.

- If you get the * prompt and no error message, type `\stop` and press Return.

D.5 Separating form and content

In Section 4.3.2, we discuss logical and visual design and how LaTeX allows you to concentrate on the logical design and takes care of the visual design.

LaTeX uses four tools to separate the logical and visual design of a document:

1. Commands Information is given to LaTeX in the arguments of commands. For instance, title page information is given in this form. The final organization and appearance of the title page is completely up to the document class and its options.

A more subtle example is the use of a command for distinguishing a term or notation. For instance, you may want to use an `\env` command for environment names. You may define `\env` as follows:

```
\newcommand{\env}[1]{\texttt{#1}}
```

This gives you a command that typesets all environment names in typewriter style (see Section 5.6.2). Logically, you have decided that an environment name should be marked up. Visually, you may change your decision any time. By changing the definition to

```
\newcommand{\env}[1]{\textbf{#1}}
```

all environment names are typeset in bold (see Section 5.6.5).

The following, more mathematical, example is taken from `sampartu.tex` (see Section 11.3 and the `samples` folder). This article defines the construct $D^{\langle 2 \rangle}$ with the command

```
\newcommand{\Dsq}{D^{\langle 2 \rangle}}
```

If a referee or coauthor suggests a different notation, editing this *one line* changes the notation throughout the entire article.

2. Environments Important logical structures are placed within environments. For example, list items are typed within a list environment (see Section 6.2) and formatted accordingly. If you later decide to change the type of the list, you can do so by simply changing the name of the environment.

3. Proclamations You can change the style or numbering scheme of any proclamation at any time by changing that proclamation's definition in the preamble. See the typeset `sampart` article on pages 286–288 for examples of proclamations typeset with different styles.

4. Numbering and cross-referencing Theorems, lemmas, definitions, sections, and equations are logical units that can be freely moved around. LaTeX automatically recalculates the numbers and cross-references.

You write articles to communicate your ideas. The closer you get to a separation of logical and visual design, the more you are able to concentrate on that goal. Of course, you can never quite reach this ideal. For instance, a `line too wide` warning (see Sections 2.3 and 5.7.1) is a problem of visual design. When a journal changes the document class in an article you submitted, unless the new document class retains the same fonts and line width of the document class you used, new `line too wide` problems arise. LaTeX is successful in automatically solving visual design problems well over 95% of the time. That is getting fairly close to the ideal.

APPENDIX

E

LaTeX and the Internet

While LaTeX is pretty stable, the rest of the world around us is changing very fast and the Internet plays an ever larger role in our lives. This appendix deals with the Internet as a useful source of LaTeX information.

The Internet is clearly the main repository of all matters LaTeX, and the Comprehensive TeX Archive Network (CTAN) is the preeminent collection of TeX-related material. Section E.1 discusses how and where to find the LaTeX distribution, AMS and LaTeX packages, and the sample files for this book on CTAN.

Various international TeX user groups (especially TUG, the TeX Users Group) and the American Mathematical Society play a significant role in supporting LaTeX. I discuss some of the major user groups in Section E.2.

Finally, you find a great deal of useful information on the Internet concerning LaTeX. I provide some pointers in Section E.3.

E.1 Obtaining files from the Internet

Say you are interested in using Piet van Oostrum's `fancyhdr` package mentioned in Section 10.6. Chances are you can go ahead and use it, your LaTeX installation already has it. In this age of gigantic hard disks, your LaTeX installation places pretty much

everything on your computer. But what if your version of `fancyhdr` needs updating or you need a new package. How you go about getting it?

We discuss below the proper way of doing this, with an FTP client or a Web browser. But maybe the simplest approach is to google `fancyhdr`. The first line of the first entry of the complete list of 82,100 responses is

```
The TeX Catalogue OnLine, Entry for fancyhdr, Ctan Edition
```

Clicking on it takes you to a page describing the package. You can get the package by clicking on `Download`. It is this simple.

In general, there are two types of Internet sites from which you can download files:

- FTP sites (using the file transfer protocol)
- Web sites (using the HTTP protocol)

To access them, use a *client* application on your computer to connect to a *server* on another machine. Today, most *Web browsers*, which are designed to connect to Web sites, also handle FTP transfers.

All operating systems include a browser and an FTP client as part of the system.

The Comprehensive TeX Archive Network

The Comprehensive TeX Archive Network (CTAN) is the preeminent collection of TeX-related material on the Internet. There are three main CTAN hosts:

- U.S.
  - FTP address: `ftp://tug.ctan.org/`
  - Web address: `http://www.ctan.org/`
- U.K.
  - FTP address: `ftp://ftp.tex.ac.uk/`
  - Web address: `http://www.tex.ac.uk/`
- Germany
  - FTP address: `ftp://ftp.dante.de/`
  - Web address: `http://www.dante.de/`

If you go to a CTAN site, at the very root you find `README.structure`, a very important file. It describes the bottom of the archive tree.

- `biblio` Systems for maintaining and presenting bibliographies within documents typeset using LaTeX

- `digests` Collections of TEX mailing list digests, TEX-related 'electronic magazines', and indexes, etc., of printed publications
- `dviware` Printer drivers and previewers, etc., for DVI files
- `fonts` Fonts written in Metafont, and support for using fonts from other sources (e.g., those in Adobe Type 1 format)
- `graphics` Systems and TEX macros for producing graphics
- `help` FAQs and similar direct assistance, the catalogue
- `indexing` Systems for maintaining and presenting indexes of documents typeset using TEX.
- `info` Manuals and extended how-to information, errata for TEX-related publications, collections of project (e.g., LATEX and NTS) documents, etc.
- `language` Support for various languages
- `macros` TEX macros. Several directories have significant sub-trees:
  - `macros/context` The `Context` distribution
  - `macros/generic` Macros that work in several environments
  - `macros/latex` The LATEX distribution and contributed matter
  - `macros/plain` Donald Knuth's example macro set
- `nonfree` Material which is not freely-usable
- `obsolete` Material which is now obsolete, including all of LATEX 2.09
- `support` TEX support environments and the like
- `systems` TEX systems. Organized by operating environment, but also including:
  - `systems/knuth` Donald Knuth's current distribution
  - `systems/generic` Complete systems that can potentially operate in more than one operating environment
- `tds` The TEX Directory Structure standard
- `tools` Tools of use for the archive maintainers
- `usergrps` Information supplied by TEX User Groups
- `web` 'Literate Programming' tools and systems

All of these have many subdirectories, for instance, `info` has the `examples` subdirectory that contains the sample files for this book. This is a rather new subdirectory, older sample files are in `info` proper.

So if you are interested in BibTeX, you go to `biblio/`, and so on. The explanations are clear. All matters LaTeX are in `macros/latex/`, which has a number of subdirectories, including

- `base`—the current LaTeX distribution
- `required`—packages that all LaTeX installations should have, such as the AMS packages, the LaTeX tools, Babel, graphics, and PSNFSS for using PostScript fonts
- `contrib`—user-contributed packages
- `unpacked`—the base LaTeX distribution in a form that can be downloaded and placed directly in your TeX input folder

There are many *full mirrors*, exact duplicates, of CTAN and many *partial mirrors*. At the root of CTAN you find the `README.mirrors` file listing them all. To reduce network load, you should try to use a mirror located near you.

Many CTAN sites now have easy search access with Web browsers. For instance, point your browser to

`http://tug.ctan.org/search.html`

In the search field, type `fancyhdr`, and you get a long list of links. Click on

`macros/latex/contrib/fancyhdr.zip`

and you are done. If you type `gratzer`, you get the links to the help files of my various books—in `info/` and `info/examples/`.

The AMS packages

Chances are that you received the AMS packages with your LaTeX distribution. If you did not, or if you want to update them, go to a CTAN site:

- `/tex-archive/fonts/amsfonts/latex/`
- `/tex-archive/macros/latex/required/amslatex/`

or to the AMS site:

`http://www.ams.org/tex/amslatex.html`

The sample files

The sample files for this book, introduced in Section 1.2 on page 4, live on CTAN in the directory

`/info/examples/Math_into_LaTeX-4`

You can go to `/info/examples/` and download it, or you can search for the directory name `Math_into_LaTeX-4`. If you forget these, just search for `gratzer`.

You can also find the *Short Course* (Part I) on CTAN:

`/info/Math_into_LaTeX-4/Short_Course.pdf`

E.2 The TEX Users Group

The TEX Users Group (TUG) does a tremendous job of supporting and promoting TEX, by publishing a journal, *TUGboat*, three times a year and organizing an annual international conference. TUG also helps support the LATEX3 team in maintaining LATEX and developing LATEX3.

Consider joining TUG if you have an interest in LATEX. TUG's contact information is:

1466 NW Naito Parkway
Suite 3141
Portland, OR 97209–2820

Telephone: (503) 223-9994
E-mail: `office@tug.org`
Web page: `http://www.tug.org/`

If you are a member, you receive every year a brand new TEX Live DVD, which contains everything you need to install LATEX as described in Appendix A.

International TEX users groups

There are also many TEX users groups that are geographic or linguistic in nature. Some of the main groups include

- Dante in Germany `www.dante.org`
- GUTenberg in France `www.gutenberg.eu.org`
- NTG in the Netherlands `www.ntg.nl`
- UK TUG in the U.K. `uk.tug.org`

Click on `User groups` on the home page of TUG.

The American Mathematical Society

The AMS provides excellent technical advice for using the AMS packages and AMS-Fonts. You can reach the AMS technical staff by e-mail at `tech-support@ams.org`, or by telephone at (800) 321-4267 or (401) 455-4080. You can also find a great deal of helpful TeX information on the AMS Web site in the `Author Resource Center`.

E.3 Some useful sources of LaTeX information

You may find useful the Frequently Asked Questions (FAQ) documents maintained on CTAN in the `/tex-archive/help/` directory. The U.K. TeX Users Group maintains its own FAQ list at

`http://www.tex.ac.uk/cgi-bin/texfaq2html?introduction=yes`

The AMS FAQ is at

`http://www.ams.org/authors/author-faq.html`

You can also ask most TeX-related questions in the Usenet newsgroup `comp.text.tex`.

Most LaTeX implementations have discussion groups. For the `MiKTeX` discussion group go to `MiKTeX.org` and for the `WinEdt` editor/frontend go to `WinEdt.org`. On the Mac side, go to

`http://www.esm.psu.edu/mac-tex/`

or to the `TeXShop` user forum at

`http://www.apfelwiki.de/forum/viewforum.php?f=6`

Another useful place is Sebastian Rahtz's Interesting TeX-related URLs

`http://www.tug.org/interest.html`

containing many links to many other useful sites.

APPENDIX

F

PostScript fonts

In the late 1990s, as we mentioned in Section D.1.4, a consortium (the AMS, Blue Sky Research, and Y&Y) released a free PostScript version of the CM and AMS fonts, so everyone could switch to PostScript fonts, a tremendous advance for LaTeX users.

The Computer Modern fonts were originally "hardwired" into LaTeX. Many users liked LaTeX but disliked the Computer Modern font, and with the spread of personal computers and PostScript laser printers, it was imperative that more PostScript fonts be integrated into LaTeX. In Section F.1, I describe how easy it is to use standard PostScript fonts, such as Times. In Section F.2, I show you how to replace the CM and AMS fonts in a LaTeX document with the Lucida Bright fonts.

And now an apology. "PostScript font" is the terminology that lay people, like me, use. The proper terminology is *Adobe Type 1 format font.* PostScript has provision for a wide range of fonts including Type 3 and Type 1 (as well as Type 42 and Type 5, and so on). The Type 3 font category is very general and includes bitmap fonts, grayscaled fonts, and so on. Type 1 fonts are tightly constrained *outline* fonts, which can be accurately rendered at almost any resolution, and have a special purpose code that deals only with Type 1 fonts.

F.1 The Times font and MathTıme

In this section, we step through the process of incorporating the Adobe Times font into a LaTeX document to replace the Computer Modern text fonts, and, optionally, of using the *MathTıme Pro 2* math fonts to replace the Computer Modern math fonts. To do so, we use the PSNFSS packages (see Section 12.3).

A document class specifies three standard font families (see Section 5.6.2):

- A roman (or serif) font family
- A sans serif font family
- A typewriter style font family

The `times` package in the PSNFSS distribution makes Times the roman font family, Helvetica the sans serif font family, and Courier the typewriter style font family.

Setting up Times

First, install the Adobe Times, Helvetica, and Courier PostScript fonts and their TeX font metric files.

Now typeset the `psfonts.ins` file—in the PSNFSS distribution. This produces `sty` files for the standard PostScript fonts. The Times style file is called `times.sty`. If you do not already have it, copy it into a folder LaTeX can access (see Sections A.1.6 and A.2.6).

To use the `times` package, you must have the *font definition* (`fd`) files for the fonts specified. By checking the `times.sty` file, you see that you need three files for the three fonts: Times, Helvetica, and Courier. In the `times` package these are named `ptm`, `phv`, and `pcr`, respectively. The three file names, each comprising three characters, are the font names in the naming scheme devised by Karl Berry. In `ptm`, `p` stands for the foundry's name (in this case, Adobe), `tm` stands for Times, `hv` for Helvetica, and `cr` for Courier. The corresponding font definition files are named `ot1ptm.fd`, `ot1phv.fd`, and `ot1pcr.fd`, respectively. `OT1` designates the old TeX font encoding scheme, which is not discussed here. You can get these files from CTAN (see Section E.1). If you do not already have it, copy it into a folder LaTeX can access (see Sections A.1.6 and A.2.6).

Using Times

In the preamble of your document, type

```
\usepackage{times}
```

after the `\documentclass` line. Then Times becomes the roman, Helvetica the sans serif, and Courier the typewriter style document font family. That is all there is to it.

Using the `times` package changes the document font family throughout your document. To switch to Times only occasionally, type

```
{\fontfamily{ptm}\selectfont phrase}
```

The text preceding and following this construct is not affected. For example,

```
{\fontfamily{ptm}\selectfont
This text is typeset in the Times font.}
```

typesets as

This text is typeset in the Times font.

Similarly,

```
\fontfamily{ptm}\selectfont
This text is typeset in the Times font.
\normalfont
```

also typesets the same phrase in Times. Recall that the `\normalfont` command restores the document font family (see Section 5.6.2).

Setting up *MathTıme*

Looking at a mathematical article typeset with the Times text font, you may find that the Computer Modern math symbols look too thin. To more closely match Times and other PostScript fonts, Michael Spivak modified the CM math symbols, calling these modified fonts *MathTıme Pro 2*. You can purchase these fonts from Personal TeX,

```
http://store.pctexstore.com/
```

Install the *MathTıme Pro 2* PostScript fonts and the TEX font metric files. If you do not already have them, copy from PSNFSS the files

```
mathtime.ins   mathtime.dtx  mtfonts.fdd
```

into a folder LATEX can access (see Sections A.1.6 and A.2.6).

Typeset `mathtime.ins` to produce the necessary `fd` files and the `mathtime.sty` file.

Using *MathTıme*

If you want to use Times as the document font family and *MathTıme* as the default math font, specify

```
\usepackage[LY1]{fontenc}          %specify font encoding
\usepackage[LY1,mtbold]{mathtime}  %switch math fonts
\usepackage{times}                 %switch text fonts
```

in the preamble of your document.

The `mathtime` package has many options. See its documentation for more information; typeset `mathtime.dtx` to get it.

F.2 Lucida Bright fonts

Another alternative to Computer Modern fonts is *Lucida Bright* for both text and math fonts. You can purchase the Lucida Bright fonts from TUG.

Copy the files

```
lucidabr.ins, lucidabr.dtx,
lucidabr.fdd,lucidabr.yy
```

into your TEX input folder (see Sections A.1.6 and A.2.6). Typeset `lucidabr.yy`, producing the `lucidabr.sty` file and a large number of `fd` files.

Now add the lines

```
\usepackage[LY1]{fontenc}     %specify font encoding
\usepackage[LY1]{lucidabr}    %switch text and math fonts
```

in the preamble of your document. The `lucidabr` package has many options. See its documentation—typeset `lucidabr.dtx` to get it.

F.3 More PostScript fonts

You can obtain PostScript fonts from a wide variety of sources. There are many free PostScript fonts on CTAN. Table F.1 is a short list of the more prominent commercial vendors.

See also the Web page at `http://www.microsoft.com/typography/` for a lot of useful information and links.

Foundry	URL
Adobe	`www.adobe.com/type/`
Agfa/Monotype	`www.agfamonotype.com/`
Berthold	`www.bertholdtypes.com/`
Bitstream	`www.bitstream.com/`
Coniglio	`www.conigliotype.com/`
Emigre	`www.emigre.com/`
Hoefler	`www.typography.com/`
ITC	`www.itcfonts.com/`
Linotype	`www.linotype.com/`
Monotype	`www.fonts.com/`
Scriptorium	`www.fontcraft.com/`
Vintage	`www.vintagetype.com/`

Table F.1: Some type foundries on the Internet.

APPENDIX

G

LaTeX localized

If the language in which you write articles is not American English and/or your keyboard is not the standard American keyboard, you may find it annoying and sometimes difficult to use standard LaTeX. The annoyance may start with finding out how to type ~ for a nonbreakable space, to LaTeX's inability to properly hyphenate `Gr\"{a}tzer`, and LaTeX's inability to use a different alphabet.

Many of the improvements to LaTeX in recent years have been to localize LaTeX, that is, to adapt LaTeX for use with languages other than American English and keyboards other than standard American keyboards. The

`babel  fontenc  inputenc`

packages are the major players, along with new font-encoding schemes, including the T1 encoding. You find these packages as part of the LaTeX distribution (see Section 12.3).

The `babel` package is described in detail in Johannes Braams, *Babel, a multilingual package for use with LaTeX's standard document classes* [7] and in Chapter 9 of *The LaTeX Companion,* 2nd edition [46].

If you are interested in using a localized LaTeX, you should turn to the TeX user group for that linguistic group to find out what is available. You should also consult

the `babel` user guide.

At a minimum, a supported language has translated redefinable names (see Table 15.1), and a localized variant of the `\today` command. Two very advanced language adaptations are German and French.

We first illustrate the use of the `babel` package with the German language, which gives you a rich set of features, including

- Allows you to type `"a` for `\"{a}`
- Introduces `"s` for sharp s (eszett)
- Introduces `"ck` for a `ck` that becomes k-k when hyphenated

Type the following test file: (`german.tex` in the `samples` folder):

```
\documentclass{article}
\usepackage[german]{babel}
\usepackage[T1]{fontenc}

\begin{document}
\section{H"ullenoperatoren}
Es sei $P$ eine teilweise geordnete Menge. Wir sagen,
dass in $P$ ein \emph{H"ullenoperator} $\lambda$
erkl"art ist, wenn sich jedem $a \in  P$ ein eindeutig
bestimmtes $\lambda(a) \in P$ zuordnen l"a"st, so  dass
die folgenden Bedingungen erf"ullt sind.
\end{document}
```

And here it is typeset:

1 Hüllenoperatoren

Es sei P eine teilweise geordnete Menge. Wir sagen, dass in P ein *Hüllenoperator* λ erklärt ist, wenn sich jedem $a \in P$ ein eindeutig bestimmtes $\lambda(a) \in P$ zuordnen läßt, so dass die folgenden Bedingungen erfüllt sind.

The second example uses the following options for the packages:

```
\usepackage[T2A]{fontenc}
\usepackage[koi8-u]{inputenc}
\usepackage[ukrainian]{babel}
```

The encoding `koi8-u` is appropriate for Ukrainian.

And here is the typeset Ukrainian sample file:

Поняття теорії ігор

Віктор Анякін

31 липня 2006 р.

Логічною основою теорії ігор є формалізація трьох понять, які входять в її визначення і є фундаментальними для всієї теорії:

- Конфлікт,
- Прийняття рішення в конфлікті,
- Оптимальність прийнятого рішення.

Ці поняття розглядаються в теорії ігор у найширшому сенсі. Їх формалізації відповідають змістовним уявленням про відповідні об'єкти.

Змістовно, конфліктом можна вважати всяке явище, відносно якого можна казати про його учасників, про їхні дії, про результати явищ, до яких призводять ці дії, про сторони, які так чи інакше зацікавлені в таких наслідках, і про сутність цієї зацікавленості.

Якщо назвати учасників конфлікту *коаліціями дії* (позначивши їхню множину як $\Re_D$, можливі дії кожної із коаліції дії — її *стратегіями* (множина всіх стратегій коаліції дії K позначається як S), результати конфлікту — *ситуаціями* (множина всіх ситуацій позначається як S; вважається, що кожна ситуація складається внаслідок вибору кожної із коаліцій дії деякої своєї стратегії, так, що $S \subset \prod_{K \in \Re} S_K$), зацікавлені сторони — *коаліціями інтересів* (їх множина — $\Re_I$) і, нарешті, говорити про можливі переваги для кожної коаліції інтересів K однієї ситуації s' перед іншою s'' (цей факт позначається як $s' \underset{K}{\prec} s''$), то конфлікт в цілому може бути описаний як система

$$\Gamma = \langle \Re_D,\, \{S_K\}_{K \in \Re_D},\, S,\, \Re_I,\, \{\underset{K}{\prec}\}_{K \in \Re_I} \rangle$$

Така система, яка представляє конфлікт, називається *грою*. Конкретизації складових, які задають гру, призводять до різноманітних класів ігор.

APPENDIX

H

Final thoughts

In this final appendix, I will outline some of the material I did not discuss and suggest some additional reading to learn more about LaTeX, typesetting, and writing. We conclude by looking at some projects that may come to fruition soon.

H.1 What was left out?

The mission statement in the introduction stated that my goal for this book was to provide you with a good foundation in LaTeX including the AMS packages, and that we would not cover programming or visual design. As a result, I have omitted a great deal of material.

H.1.1 LaTeX omissions

LaTeX has some additional features that I have not discussed in this book:

1. The `picture` environment allows you to draw simple pictures with lines and circles.
2. The `array`, `tabular`, and `tabbing` environments have a number of additional features.

3. LaTeX makes the style parameters of a document and of most LaTeX constructs available to the user for modification. Very few of these parameters have been mentioned in this book.

4. Low-level NFSS commands provide finer control over fonts.

The following are some pointers to additional information on these topics:

1. Drawing with the `picture` environment has the advantage of portability. This environment is described in Leslie Lamport's *LaTeX: A Document Preparation System,* 2nd edition [43]. A very advanced internal drawing system is TikZ by Till Tantau, see

   `http://sourceforge.net/projects/pgf/`

   However, I believe that the best approach is to use a drawing application that can save your illustrations in EPS or PDF format so that you can include them in your document using the `graphicx` package (see Section 10.4.3).

2. The `tabbing`, `tabular`, and `array` environments—and their extensions—are described in detail in Leslie Lamport's *LaTeX: A Document Preparation System,* 2nd edition [43] and Chapter 5 of *The LaTeX Companion,* 2nd edition [46].

3. The style parameters for LaTeX are set by the document class. When a publisher changes the document class loaded by your document, the style parameters are changed to its specifications. If you explicitly change style parameters in your document, a publisher will have trouble getting your source file to conform to their publishing style. If you must change any basic style parameters, be sure to explain what you did with comments.

4. There are two types of commands defined in the NFSS, high-level and low-level commands. The latter are, by and large, meant for style designers and package writers. Nevertheless, anyone who wants to use fonts other than Computer Modern (the default) would do well to read Chapter 7 of *The LaTeX Companion,* 2nd edition [46].

   Low-level NFSS commands are briefly mentioned in Section 5.6.9 and are used in Appendix F.

H.1.2 TeX omissions

Almost all discussion of Plain TeX was omitted from this book. TeX is a powerful programming language, allowing you to design any page layout or formula. Remember, however, that to change any design feature, you should be knowledgeable not only about TeX, but also about document design. Also keep in mind that making such changes may make it difficult or impossible for a publisher to make your document conform to its own specifications.

H.2 Further reading

Much documentation is included with the LaTeX and the AMS distributions and many third-party packages are also well documented. You will also find a great deal of documentation on CTAN.

As you have no doubt noticed, there are many references to *The LaTeX Companion,* 2nd edition [46] in this book. While it is not a beginner's book, it is indispensable for advanced LaTeX users with special needs. It is also the best overview of more than a hundred important packages. For package writers and students of NFSS, it is *the* basic textbook. For graphics work, read *The LaTeX Graphics Companion* [17], and on Web publishing *The LaTeX Web Companion* [18].

Learning TeX is a bit more complicated than learning LaTeX. You may want to start with Wynter Snow's *TeX for the Beginner* [57]. It introduces many of TeX's basic concepts in a very relaxed style with many examples. The notes on LaTeX make the book especially useful, and the author gives many examples of writing macros. The use of TeX as a programming language is not discussed.

Raymond Seroul and Silvio Levy's *A Beginner's Book of TeX* [56] is another good introduction. This book also includes a chapter on TeX programming. Donald E. Knuth's *The TeXbook* [38] provides an easy introduction to TeX, as long as you avoid the difficult parts marked by dangerous bend signs. Paul W. Abrahams, Karl Berry, and Kathryn A. Hargreaves' *TeX for the Impatient* [1] explains many TeX commands, grouped by topic. This book has a very useful, nonsequential approach. Finally, Victor Eijkhout's *TeX by Topic: A TeXnician's Reference* [14] is an excellent reference book on TeX, mainly for experts. For many tutorial examples, see the articles and columns in *TUGboat* (see Section E.2).

For advice to authors of mathematical articles and books, see *Mathematics into Type* [58] by Ellen Swanson (updated by Arlene Ann O'Sean and Antoinette Tingley Schleyer). You may find it interesting to see how many of the rules in Swanson's book have been incorporated into LaTeX. The definitive book on style (in North America) is *The Chicago Manual of Style,* 15th edition [11]. Two other views on copy editing are presented in Judith Butcher's *Copy Editing: The Cambridge Handbook* [9] and *Hart's Rules for Compositors and Readers at the University Press, Oxford* by Horace Hart [35], updated in R. M. Ritter's *New Hart's Rules: The Handbook of Style for Writers and Editors* [54]. The special problems of writing about math and computer science are admirably dissected in Lyn Dupré's *BUGS in Writing: A Guide to Debugging Your Prose,* 2nd edition [13].

Most people who write math have little or no background in typography, the art of printing with type. But when you become a typesetter, it can be useful to learn a little bit about typography. I would highly recommend Robert Bringhurst's *The Elements of Typographic Style* [8]. See also Ruari McLean's *The Thames and Hudson Manual of Typography* [44] and Alison Black's *Typefaces for Desktop Publishing: A User Guide* [6].

Harley Hahn's *A Student's Guide to Unix* [34] provides an excellent introduction to UNIX.

H.3 What's coming

I do not have a very good record forecasting what important projects will be completed in the near future. In 1995, when I completed my second big LaTeX book, I thought that LaTeX3 was just around the corner. Now, more than a decade later, I am still hopeful. There seems to be some movement. In 2000, I thought that the new version of BibTeX is just around the corner ...

Today, maybe most progress is happening with *Unicode,* a character encoding standard developed by the Unicode Consortium in cooperation with W3C and ISO, specifically, with ISO/IEC/JTC 1/SC2/WG2, which is responsible for refining the specification and expanding the character set of ISO/IEC 10646. The goal of Unicode is to provide a uniform encoding for all the characters we need in all human languages, collectively, in addition to the thousands of symbols used in science, in particular, in mathematics. The project, *STIX,* which started more than 10 years ago, may see the light of day before this year is out. STIX will provide fonts that include thousands of mathematical symbols encoded in Unicode.

A number of important projects were and are undertaken to develop a Unicode based LaTeX, namely, Omega, Aleph, and XeTeX.

The first of these, *Omega*, was developed as an extension of TeX, to use with multilingual texts. While Omega showed a lot of promise in the mid-1990s, its development stopped. The second of these, *Aleph,* merged e-TeX with the Omega codebase. In 2006, Omega$_2$ has emerged, to continue the work.

The most promising project is XeTeX from Jonathan Kew who works for SIL International. XeTeX is a typesetting system that extends TeX to work with Unicode and modern font technologies such as OpenType. XeTeX was originally developed for Mac OS X, but is now available on a variety of operating systems including Windows and Linux.

XeTeX is approaching version 1, and is considered very solid. For more information, see the XeTeX home page

`http://scripts.sil.org/xetex`

There are a number of promising attempts to bring TeX into the 21st century. LuaTeX, see at

`http://luatex.org/documentation.html`

has an ambitious set of goals and a tight timetable. A similar project, ε_χTeX, see at

`http://extex.org/`

is based on the New Typesetting System that was started in 1992. It reached alpha stage

in 2000. Many parts of the system are ready and we may soon see an alpha release.

Another very important area of development is *OpenType*, a successor font format of TrueType by Apple computer and the Type 1 font format of Adobe. It became an ISO standard "Open Font Format" in 2006. Microsoft's Vista operating system uses Open Type. The TEX fonts are not yet available in this format.

Bibliography

[1] Paul W. Abrahams, Karl Berry, and Kathryn A. Hargreaves, *TEX for the Impatient.* Addison-Wesley, Reading, MA, 1990.

[2] Adobe Systems, *PDF Reference, Version 1.6.* 5th edition. Adobe Press, 2004.

[3] American Mathematical Society, *AMSFonts, Version* 2.2 *User's Guide.* Providence, RI, 1997.

[4] ———, *User's Guide for the* `amsmath` *Package* (*version* 2.0). Providence, RI, 1999. (Revised 2002.)

[5] ———, *Using the* `amsthm` *package* (*version* 2.20). Providence, RI, 2004.

[6] Alison Black, *Typefaces for Desktop Publishing: A User Guide.* Architecture Design and Technology Press, London, 1990.

[7] Johannes Braams, *Babel, a multilingual package for use with LATEX's standard document classes.* 2005, on CTAN.

[8] Robert Bringhurst, *The Elements of Typographic Style.* Hartley & Marks Publishers, 2004.

[9] Judith Butcher, Caroline Drake, Maureen Leach, *Butcher's Copy-editing: The Cambridge Handbook for Editors, Copy-editors and Proofreaders.* 4th edition. Cambridge University Press, London, 2006.

[10] Pehong Chen and Michael A. Harrison, *Index preparation and processing.* Software Practice and Experience **19** (9) (1988), 897–915.

[11] *The Chicago Manual of Style.* 15th edition. University of Chicago Press, Chicago, 2003.

[12] Michael Doob, *TEX Starting from* 1. Springer-Verlag, New York, 1993.

[13] Lyn Dupré, *BUGS in Writing. A Guide to Debugging Your Prose.* 2nd edition. Addison-Wesley Professional, Reading, MA, 1998.

[14] Victor Eijkhout, *TEX by Topic: A TEXnician's Reference.* Addison-Wesley, Reading, MA, 1991. Free download at `http://www.eijkhout.net/tbt/`

[15] Michel Goossens, Frank Mittelbach, and Alexander Samarin, *The LaTeX Companion.* Addison-Wesley, Reading, MA, 1994.

[16] Enrico Gregorio, *Horrors in LaTeX: How to misuse LaTeX and make a copy editor unhappy, TUGboat* **26** (2005), 273–279.

[17] Michel Goossens, Sebastian Rahtz, and Frank Mittelbach, *The LaTeX Graphics Companion.* Addison-Wesley, Reading, MA, 1997.

[18] Michel Goossens and Sebastian Rahtz (with Eitan Gurari, Ross Moore, and Robert Sutor), *The LaTeX Web Companion: Integrating TeX, HTML and XML.* Addison-Wesley, Reading, MA, 1999.

[19] George Grätzer, *Math into TeX: A Simple Introduction to AMS-LaTeX.* Birkhäuser Boston, 1993.

[20] ———, *AMS-LaTeX.* Notices Amer. Math. Soc. **40** (1993), 148–150.

[21] ———, *Advances in TeX implementations. I. PostScript fonts.* Notices Amer. Math. Soc. **40** (1993), 834–838.

[22] ———, *Advances in TeX implementations. II. Integrated environments.* Notices Amer. Math. Soc. **41** (1994), 106–111.

[23] ———, *Advances in TeX implementations. III. A new version of LaTeX, finally.* Notices Amer. Math. Soc. **41** (1994), 611–615.

[24] ———, *Advances in TeX. IV. Header and footer control in LaTeX.* Notices Amer. Math. Soc. **41** (1994), 772–777.

[25] ———, *Advances in TeX. V. Using text fonts in the new standard LaTeX.* Notices Amer. Math. Soc. **41** (1994), 927–929.

[26] ———, *Advances in TeX. VI. Using math fonts in the new standard LaTeX.* Notices Amer. Math. Soc. **41** (1994), 1164–1165.

[27] ———, *Math into LaTeX: An Introduction to LaTeX and AMS-LaTeX.* Birkhäuser Boston, 1996. 2nd printing, 1998.

[28] ———, *General Lattice Theory.* 2nd edition. Birkhäuser Verlag, Basel, 1998. xix+663 pp.

[29] ———, *First Steps in LaTeX.* Birkhäuser Boston, Springer-Verlag, New York, 1999.

[30] ———, *Math into LaTeX.* 3rd edition. Birkhäuser Verlag, Boston, Springer-Verlag, New York, 2000. xl+584 pp. ISBN: 0-8176-4131-9; 3-7643-4131-9

[31] ———, *Turbulent transition, TUGboat* **21** (2001), 111–113.

[32] ———, *Publishing legacy document on the Web, TUGboat* **22** (2001), 74–77.

[33] James Hafner, FoilTeX. *A LaTeX 2ε class for overhead transparencies.* 2002.

[34] Harley Hahn, *Harley Hahn's Student's Guide to Unix.* 2nd edition. McGraw-Hill, New York, 1993.

[35] Horace Hart, *Hart's Rules For Compositors and Readers at the University Press, Oxford.* Oxford University Press, Oxford, 1991.

[36] Uwe Kern, *Extending LaTeX's color facilities: the xcolor package.* December 21, 2005. `http:\\www.ukern.de\tex\xcolor.html`

[37] Donald E. Knuth, *The Art of Computer Programming.* Volumes 1–3. Addison-Wesley, Reading, MA, 1968–1998.

[38] ———, *The TeXbook.* Computers and Typesetting. Vol. A. Addison-Wesley, Reading, MA, 1984, 1990.

[39] ———, *TeX: The Program.* Computers and Typesetting. Vol. B. Addison-Wesley, Reading, MA, 1986.

[40] ———, *The METAFONTbook.* Computers and Typesetting. Vol. C. Addison-Wesley, Reading, MA, 1986.

[41] ———, *METAFONT: The Program.* Computers and Typesetting. Vol. D. Addison-Wesley, Reading, MA, 1986.

[42] ———, *Computer Modern Typefaces.* Computers and Typesetting. Vol. E. Addison-Wesley, Reading, MA, 1987.

[43] Leslie Lamport, *LaTeX: A Document Preparation System.* 2nd edition. Addison-Wesley, Reading, MA, 1994.

[44] Ruari McLean, *The Thames and Hudson Manual of Typography.* Thames and Hudson, London, 1980.

[45] Frank Mittelbach, *An extension of the LaTeX theorem environment. TUGboat* **10** (1989), 416–426.

[46] Frank Mittelbach and Michel Goosens (with Johannes Braams, David Carlisle, and Chris Rowley), *The LaTeX Companion.* 2nd edition. Addison-Wesley, Reading, MA, 2004.

[47] Frank Mittelbach and Chris Rowley, *LaTeX 2.09 → LaTeX3. TUGboat* **13** (1) (1992), 96–101.

[48] ———, *LaTeX—A new version of LaTeX.* TeX and TUG NEWS **2** (4) (1993), 10–11.

[49] ———, *The LaTeX3 project.* Euromath Bulletin **1** (1994), 117–125.

[50] ———, *LaTeX3 in '93.* TeX and TUG NEWS **3** (1) (1994), 7–11.

[51] Frank Mittelbach and Rainer Schöpf, *The new font family selection—user interface to standard LaTeX. TUGboat* **11** (1990), 297–305.

[52] Oren Patashnik, *BIBTeXing.* Document in the BibTeX distribution.

[53] ———, *BibTeX 1.0. TUGboat* **15** (1994), 269–273.

[54] R. M. Ritter, *New Hart's Rules: The Handbook of Style for Writers and Editors, Oxford.* Oxford University Press, Oxford, 2005.

[55] Rainer Schöpf, *A new implementation of the LaTeX* `verbatim` *and* `verbatim*` *environments. TUGboat* **11** (1990), 284–296.

[56] Raymond Seroul and Silvio Levy, *A Beginner's Book of TeX.* Springer-Verlag New York, 1995.

[57] Wynter Snow, *TeX for the Beginner.* Addison-Wesley, Reading, MA, 1992.

[58] Ellen Swanson, *Mathematics into Type.* Updated edition. Updated by Arlene Ann O'Sean and Antoinette Tingley Schleyer. American Mathematical Society, Providence, RI, 1999.

[59] Till Tantau, *User's Guide to the Beamer Class.* 2005.
`http://latex-beamer.sourceforge.net`

Index

Italic numbers indicate figures or tables, *bold* numbers indicate definitions.
Special symbols are placed at the end of the Index.

A
`a4paper` (doc. class opt.), 298, 306
`a5paper` (doc. class opt.), 306
`\AA` (Å), *81*, *515*
`\aa` (å), *81*, *515*
abbreviations
  in bibliographic entries, 436–437
    defining, 436
  periods in, 66–67
  using small caps for, 91, 480
  using ties (`~`) with, 66
Abrahams, Paul W., 553, 557
absolute
  names for equations, 201
  units, 12, 15, 89, 93, 95, 96, 105, 107, 111, 308, 403
`abstract` (text env.), *36*, 68, **251**, 285
  in `beamer` document class, 326
  in `report` document class, 303
  placement of, 251, 285
`abstract` (bibl. com.), 425
`\abstractname` (redef. name), 375
abstracts, *36*, **251**, 326
  in AMS document classes, 285
  in presentations, 53–55
  in `report` document class, 303
  separate page for, 249, 299
accents
  European, 15, *79*, **79–80**, *519*
  hyphenation of words with, 82
  in bibliographies, 427
  in `hyperref` titles, 322
  math, **25**, **176–178**, 183, 185, 301, 377, 483
    double, **177**
  text, 9, 15, 69, *79*, **79–80**, *516*, *519*
`accents` (pack.), 178
acronyms, using small caps for, 91, 480
acute (´ acute text accent), *79*, *516*
`\acute` ($\acute{x}$ math accent), *177*, *512*
`\addcontentsline` (table of contents com.)
  and lists of figures and tables, 476
  arguments of, 473, 476
adding lines
  to lists of figures and tables, 476
  to tables of contents, 473–474
addition, 22, 63, 157
`\address` (top matter com.), 54, 296, 326
  in letters, 309
  optional arguments of, 277
  rules for using, 277
  with multiple authors, 281
`address` (BibTeX database field), 424, 425
addresses
  in letters, 309
  of authors in articles, 44, 277, 281, 296
`\addtocontents` (table of contents com.)
  and lists of figures and tables, 476
  arguments of, 474, 476
`\addtocounter` (counter incr. com.), 402
`\addtolength` (counter setting com.), 405
adjusted
  columns, 210, **231–242**
  formulas, 210, **231–242**
    flush left and right, 214

adjusting
interline spacing, **95**, 98–99
placement of root with `\sqrt`, 162
Adobe
Acrobat Professional, 318, 319, 321, 325, 483
converting from Postscript to PDF, 319
placing hyperlinks in documents, 319
Portable Document Format (PDF), *see under* PDF
PostScript (PS), *see* PS
Reader, 53, 321, 325, 358, 486
Adobe Systems, 317–319, 557
`\AE` Aesc (Æ), *81*, *515*
`\ae` aesc (æ), *81*, *515*
`\afterpage` (delay com.), 312
`afterpage` (pack.), 312
afterwords, of books, 467
`\aleph` (ℵ Hebrew char.), *501*
`\alert` (`beamer` text style com.), 337
`align` (math align. env.), 30–31, 33, *208*, 209, 210, **219–224**, 230, 483, 524
annotated, 209
page breaks in, 242
`align*` (math align. env.), 31, 221, 226
`alignat` (math align. env.), *208*, 210, **224–226**
argument of, 226
aligned
formulas, **30–32**, 207–211, 219–226, 230–232, 242, 298, 524
text in, 226–227
math environments, 242
`align`, 30–32, *208*, 210, **219–224**, 230, 242
`alignat`, *208*, 210, **224–226**
and `\verb` commands, 148
`eqnarray`, 222
`flalign`, *208*, 210, **221**
inserting lines of text in, 226
intercolumn space in, 209
subsidiary math environments, 227–231
`aligned`, 211, 227–230
`alignedat`, 227–230
`split`, *208*, 211, **230–231**, 298
`aligned` (subsid. math align. env.), 211, 227–230
and `\allowdisplaybreaks` commands, 243
`alignedat` (subsid. math align. env.), 227–230
and `\allowdisplaybreaks` commands, 243
alignment
of columns in `tabular` environments, 135, 136, 313
of formulas, *see also under* adjusted, 219–231
annotated, *32*, 209
commands for, 214
flush left and right, 209
multiline, 30–33, **217–219**
simple, *31*, 30–31
of large symbols, 229–230
of text, **8**, 68, 106, **124**, 134, 227, 407
centering, 8, 14, 54, 124, **124**, 134, 137, 227, 327, 414
command declarations for, **124**, 137
flush left, 8, 14, 124
flush right, 8, 14, 106, 124
with `trivlist` environments, 414
of text boxes, vertical, 111
point
for annotations (`&&`), 32
for subformulas (`&`), 30, 31, 33, 216, 218, 221
within text boxes, 107, 111
`allowdisplaybreaks` (display break com.), **242**
and subsidiary math environments, 243
optional argument of, 243
`alltt` (disp. text env.), 159, 311
`alltt` (pack.), 147, 311, 534
`\Alph` (uppercase letter counter style com.), *401*
`\alph` (lowercase letter counter style com.), *401*
`\alpha` (α Greek char.), *502*
`alpha` (BIBTEX style), 428
alphabets (counter styles), *401*
alphabets, math, *196*, **195–196**
blackboard bold, 181, **197**, 390, *512*
calligraphic, 185, **197**, 301, 390, *512*
Euler Fraktur, 180, 182, **197**, 301, 302, 390, *512*
Euler Script, **301**, 302, 390, *512*
Greek, 197
symbol, **197–199**
alphanumeric keys, 8–9
`\amalg` ($\amalg$ math op.), *506*
American Standard Code for Information Interchange, *see* ASCII
ampersand (&)
as alignment point
for annotations, 32, 33
for subformulas, 30, 31, 216, 218, 221
as column separator, 25, 135, 220, 221
text symbol, *77*, *81*, *518*
AMS (American Mathematical Society), xxix, 525, 543
AMSFonts, *see* AMSFonts
article templates, 294–297
bibliographies

database files, 437
fields, 425
sample files, 437, **437–438**
styles, **266**, **421**, *421*, 426, 437–438
distribution, 271, **300–302**, 380, 436, 437, 521, 528, 553
document classes, *see* document classes
environments, *see* displayed math environments, subsidiary math environments, *and* text environments
front matter, *see* front matter
packages, *see* packages
sample files, *see under* sample files
subject classifications, 279
technical support provided by, 542
top matter, *see also under* top matter
AMS specific information, 279–281
article information, 273–275
author information, 275–279
commands, **273–285**, 296
examples of, 282–285
rules for, 275–279
with multiple authors, 281
Web site, 280, 542
`\AmS` ($\mathcal{AMS}$ logo com.), 80
AMS package distribution, 271, **300–302**, 325, 380, 417, 436, 437, 521, 528, 553
$\mathcal{AMS}$-LaTeX, 523, 524
history of, 521–525
version 1.0, 524
version 1.1, 524
two-letter font commands, **94**
version 1.2, 524
version 2.0, 524
$\mathcal{AMS}$-TeX, **522**, 524
history of, 521–525
`amsalpha` (BibTeX style), 428
`amsart` (doc. class), 36, 82, 125, 249–251, 254, **271–302**, 465, 469, 525, 529, 536
and numbered lists, 118
front matter of, 285
sample article, 125, 129, 131, 230, 266, 273, **285–293**, 294, 371, 376, 383, **392–398**, 421, 437, **437–443**, 535, 536
top matter of, 251
`amsart.tpl` (sample file), 294
`amsbook` (doc. class), xxxii, 253, *376*, 465, **466–473**, 525, 529
for exercises, 476
`amsbsy` (pack.), 301, 302, 528
`amscd` (pack.), 301
AMSFonts, 300, **301–302**, 525, 528
document class options for, 300
PostScript versions of, 300, 301, 524, 525, 533
technical support for, 542
updates to, 533
`amsfonts` (pack.), **301–302**, 528
options, 301
`amsgen` (pack.), 301, 302
`amslatex` (LaTeX distr. directory), 311, 312, 540
`amsmath` (pack.), xxvi, 53, 231, **300**, 301, 302, 403, 524, 525, 528, 533
document class options affecting, 299
options, 299
`amsmath.sty` (AMS distr. file), 387
`amsmidx` (pack.), 302
`\AMSname` (`hyperref` redef. name), *323*
`amsopn` (pack.), 301, 302
`amsplain` (BibTeX style), *421*, 437, 439, 441
`amsplain.bst` (BibTeX style file), **421**, *421*, 426, 437, 439, 446
`amsproc` (doc. class), 273, *376*, 529
`amsproc.template` (AMS sample template file), 297
`amsrefs`, 447
creating typeset bibliography, 447
`amssymb` (pack.), 37, 180, 294, 300, 301, 374, 528
`amstext` (pack.), 301, 302
`amsthm` (pack.), 302, 525
`amsxtra` (pack.), 176, 177, 300, 301
`\And` (& math op.), *506*
`\and`, top matter command, 304, 306
`and`, in bibliographies, 426
`\angle` ($\angle$ math sym.), *508*
annotations
alignment of, 32, *32*
alignment point for (`&&`), 32
of formulas, 225
`apalike` (pack.), 437
apostrophe (’), 11, 62
key, 23, 194
appendices, 255, 467
numbering of, 255, 467
`\appendix` (struct. com.), 255, 467
`\appendixname` (redef. name), *376*
and `hyperref` package, *323*
`\approx` ($\approx$ binary rel.), *503*
`\approxeq` ($\approxeq$ binary rel.), *504*
`\arabic` (numeric counter style com.), 401, *401*, 411
`\arccos` (arccos math op.), *172*, *510*
`\arcsin` (arcsin math op.), *172*, *510*
`\arctan` (arctan math op.), *172*, *510*
`\arg` (arg math op.), *172*, *510*

arguments
and tokens, 529
empty ({}), 39, 55, 70, 159, 179, 188, 189, 194, 204, 279, 309
errors in, *see* error messages
long, **73**
movable, 74, 475
negative, 102, 162
of commands, *see also under* specific commands, 327, 335, 349, 350, 355
of commutative diagram symbols, 240
of environments, *see also under* specific environments
of top matter commands, *see also* top matter, 272, 273, 279, 281, 284
of user-defined commands, 370–373
multiple, 370, 371
optional, 374
short, 373–374
of user-defined environments
optional, 380, 382, 384
short, 385
optional, 15, 71, 98, 100, 112, 113, 115, 125, 162, 179, 233, 242, 250
multiple, 70
of commands, 120, 122, 123, 127, 200, 201, 264, 266, 276–279, 348, 400, 402, 407, 409, 410, 414, 475
of environments, **69**, 125, 128, 132, 135, 229, 243, 260, 384, 486
of sectioning commands, 253, 473
of structural commands, 255, 466
of top matter commands, 273–281
use square brackets ([ ]), 15, 27, **69–70**, 123, 132, 135, 285
required, 111, 112, 179, 194, 272, 273, 535
multiple, 19, 70, 137, 192, 194, 268, 311, 379, 404–406
of commands, 19, **69**, 137, 192, 194, 257, 268, 280, 404, 473, 478, *516*
of environments, **69**, 135, 136, 224, 226, 236, 237, 263–264, 266, 309, **383–385**, 476
use braces ({}), 8, 14, 19, **69**, 70, 530
short, **73**
single character, 69
spacing within, 19, 85, 107, 154, 163, 181, 192, 462
specifying zero in, 114
arithmetic
operations, 22–23, 157–159
with counters, 312, **402–403**
with length commands, 312, **405**
`array` (subsid. math env.), *208*, 210, 229, 232, **236–238**, 312, 313, 523, 551, 552
arguments of, 236, 237
`array` (pack.), 312
arrays, 25–26, 236–238
`\arraystretch` (table com.), 139
adjusting vertical spacing with, 139
arrow keys, 53
arrows, math, 179, 187, 240, *507*
as delimiters, *167*, **168**, *509*
`ARTICLE` (bibl. entry type), 424, 428
`article` (doc. class), 249, 251, 273, 302, 303, **303–308**, *376*, 525, 529
anatomy of, 35–43
bibliographies in, 263, *265*
sectioning commands provided by, 254
articles
bibliographic entries in, **40–41**
bibliographies in, 47–48, **261–267**, 423, 436, **437–438**, 446
creating templates for, 44–45, 294–297
in BibTeX database files, 428–429, 436
sectioning of, 46, **252–255**
top matter information, 44–46
AMS specific, 273–285
AMS subject classifications, 279
author addresses, 44, 277, 281, 296
author names, 46, 276, 296
contributor, 276
current addresses, 277, 281
dedications, 275
e-mail addresses, 278, 281, 296
Internet addresses, 278, 281, 296
keywords, 280, 297
research support, 44, 279, 281, 296, 304
title, 44, 273, 297
ASCII (American Standard Code for Information Interchange), *see also* plain text, 9
`\ast` ($*$ math op.), *506*
asterisk (* text symbol), *81*, *518*
`\asymp` ($\asymp$ binary rel.), *503*
at sign (@)
in BibTeX database (`bib`) files, 424
in `\index` commands, 455, 456
`\author` (top matter com.), 37, 54, 249, 304, 306, 331, 469
multiple authors in, 46, 304
optional arguments of, 276, 331
`author` (BibTeX database field), 424
authors
information about, 46
in AMS top matter, 275–279, 281
multiple, 46
in AMS documents, 281
in bibliographies, 426
in documents, 304

names of
in articles, 46, 276, 296
in running heads, 276
automatic
loading of packages, 53
numbering, 28, 30, 37, 46, 119, 125, 231, 252
renumbering, 28, 536
`\autoref` (`hyperref` cross-ref. com.), 320, *320*, 322
names supported by, *323*
`aux` (aux. files), 440–443, 474, 487, **526**
symbolic references recorded in, 531
auxiliary files, 475, 486, *see also* `aux`, `bbl`, `bib`, `blg`, `bst`, `glo`, `idx`, `ilg`, `ind`, `lof`, `log`, `lot`, `out`, *and* `toc`, 531
names of, 531
polishing, 486–487

B

`\b` (_ underscore text accent), *79*, *516*
`b5paper` (doc. class opt.), 306
`babel` (LaTeX distr. directory), 311
`babel` (pack.), 312, 547–548
options, 548
`babybeamer1.pdf` (sample file), 333–335
`babybeamer2.tex` (sample file), 334
`babybeamer3.tex` (sample file), 338
`babybeamer4.tex` (sample file), 343
`babybeamer5.tex` (sample file), 341
`babybeamer6.tex` (sample file), 343
`babybeamer6block.tex` (sample file), 343
`babybeamer7.tex` (sample file), 343, 345–347
`babybeamer8.tex` (sample file), 347
`babybeamer9.tex` (sample file), 349
`babybeamer10.tex` (sample file), 359
back matter, 249, **261–268**, 467
bibliographies in, 249
index in, 450
numbering of chapters in, 467
`\backepsilon` ($\ni$ binary rel.), *504*
`\backmatter` (struct. com.), 467
`\backprime` ($\backprime$ math sym.), *508*
`backref` (pack.), 320
`backref` (opt. of `hyperref` pack.), 321
`\backsim` ($\backsim$ binary rel.), *504*
`\backsimeq` ($\backsimeq$ binary rel.), *504*
`\backslash` ($\backslash$ math delimiter), *167*, *509*
backslash ($\backslash$ text symbol), *81*, *518*
badness, 530
balancing
braces, 72, 77
errors with, 72–73
in `\index` commands, 462
inline math delimiters, 153
math delimiters, 168, 217
`\bar` ($\bar{x}$ math accent), 25, 177, *177*, 185, *512*
bar, vertical (| text symbol), *81*, *518*
`\barwedge` ($\barwedge$ math sym.), *506*
`base` (LaTeX distr. directory), **310**, 311, 540
packages in, 310
base names (of files), 531
baseline, of text, 95, 108
adjusting with `setspace`, 99
`\baselineskip` (length com.), **95**, 101
`\baselinestretch` (length com.), 99
`\Bbbk` ($\Bbbk$ math sym.), *508*
`bbl` (proc. bibl. files), **441**, 443, 446, 447
`beamer` (doc. class), *see also under* presentations, 325–359
abstracts in, 326
color in, 348
commands
`\beamergotobutton`, 344
`\breakhere`, 351
`\color`, 339, 349
`\colorbox`, 349
`\fcolorbox`, 349
`\frametitle`, 327, 328, 344
`\hyperlink`, 344
`\institute`, 326
`\note`, 355
`\only`, 333–335, **337–339**, 343
`\onslide`, 333, 335, **337–339**, 342, 343
`\pause`, 333, **333**, 334, 337
`\setbeamercolor`, 350
`\setbeamertemplate`, 355
`\tableofcontents`, 328
`\textcolor`, 349
`\usecolortheme`, 357
`\usefonttheme`, 357
`\usetheme`, 328, 356
documentation for, 325, 358
installation of, 326
options
`handout`, 358
`notes=only`, 355
`notes=show`, 355
`trans`, 355, 358
`xcolor=dvipsnam`, 349
preamble in, 326–327
sections in, 328
sidebars, 331
sidebars in, 328
table of contents in, 328
themes, 328, **356–357**
top matter in, 326–327
`\beamergotobutton` (`beamer` com.), 344
`beamerstructure.tex` (sample file), 352, 354
`\because` ($\because$ binary rel.), *504*
`\begin` (start of env.), 67, **68**, 72
`Berkeley` (`beamer` theme), 328, 331, *332*, 356

Berry, Karl, 544, 553, 557
font-naming scheme, 544
\beta (β Greek char.), *502*
\beth ($\beth$ Hebrew char.), *501*
\between ($\between$ binary rel.), *504*
Bezos, Javier, 178, 523
\bf (obs. LaTeX 2.09 font com.), 94, 95
\bfseries (font weight com. dec.), **71**, 73, *90*, **93**, 94, 95, 123, *516*
bfseries (font weight env.), 123
bib (BibTeX database files), 421, **423–437**, 440
accents in, 427
AMS, 436, **437–438**
commas (,) in, 424, 425, 445
comments in, 443
cross-referencing within, 432–433
delimited with parentheses (( )), 424
delimiters in, 424
double quote (") in, **424**, 445, 446
en dashes (–) in, 427
entries
abbreviations in, 436–437
capitalization in, 427
Jr. in, 426
multiple authors in, 426
von in, 426
entry types, 423–437
case-sensitivity of, 425
start with @, 424
equals signs (=) in, 424
fields in, 425, 431–434, 436
adding your own, 425
case-sensitivity of, 425
optional, 425, 428–436
required, 425, 428–436
rules for typing, 426–437
termination of, 445
used by AMS bibliography styles, 425
location of, 439
number ranges in, 427
numbers in, 424
periods (.) in, 426
portability of, 426
samples of, 423, 437, 446
ties (unbreakable spaces) in, 427
\bibcite (aux. file com.), 443, 531
\bibdata (aux. file com.), 441
\bibitem (bibl. com.), **29**, 47, 263
commas in, 266
labels for, 263
optional argument of, 266
spaces in, 266
bibl.tpl (sample file), 47
biblatex (pack.), 447
bibliographies, 29, *36*, *see also under* BibTeX, 47–48, **261–267**
AMS support for, 436, **437–438**
appear in back matter, 249
citing references from, 29, 47, **264**, **439**, 441
as hyperlinks in PDF files, 321
with BibTeX, 439
commands for, 437, 439
conventions, for labels, 48
defining, 29, 40–41, 48, 66, **261–267**, 375, 407, **423–437**, 442
document class options affecting, 308, *308*
entries made in auxiliary files for, 441, 443, 531
examples of, **40–41**, **43**, 47, **261–263**, **421–423**
in articles, *see also* bibliographies, sample files for, **40–41**, 423, 436, 446
multiple, in a document, 267
numbering of, 48, **264**
portability of, 426, 428
processed files, *see* bbl
sample files for, 423, 437, **437–438**, 446
styles, *421, 422*, 437
AMS, **266**, *421*, 426, 437, 439
templates, 261
with amsrefs, 447
\bibliography (bibl. com.), 69, 437, **439**
\bibliographystyle (bibl. com.), 437, **439**
\bibname (redef. name), 267, *376*
\bibstyle (aux. file com.), 441
BibTeX, 421–447
AMS support for, 436
citing references with, 439
commands, **436**, 439
in auxiliary files, 441
database files, *see* bib
log files, *see* blg
processed bibliography files, *see* bbl
running, 437–446
sample files for, 423, 437, **437–438**
style files, *see* bst
styles, *421, 422*, 426, 437, 439
BibTeX *1.0* (Patashnik), 559
BIBTeXing (Patashnik), 446
\Big (math delim. size com.), 168
\big (math delim. size com.), 168
\bigcap ($\bigcap$ large math op.), *175*, *511*
\bigcirc ($\bigcirc$ math op.), *506*
\bigcup ($\bigcup$ large math op.), *175*, *511*
\Bigg (math delim. size com.), 168
\bigg (math delim. size com.), 168
\Biggl (math delim. size com.), 169
\biggl (math delim. size com.), 169, 184

\biggm (math delim., as binary rel. size com.), 170
\Biggr (math delim. size com.), 169
\biggr (math delim. size com.), 169, 184
\Bigl (math delim. size com.), 169
\bigl (math delim. size com.), 169
\bigm (math delim., as binary rel. size com.), 170
\bigodot ($\bigodot$ large math op.), *175*, *511*
\bigoplus ($\bigoplus$ large math op.), *175*, *511*
\bigotimes ($\bigotimes$ large math op.), *175*, *511*
\Bigr (math delim. size com.), 169
\bigr (math delim. size com.), 169
\bigskip (spacing com.), **104**
\bigsqcup ($\bigsqcup$ large math op.), *175*, *511*
\bigstar ($\bigstar$ math sym.), *508*
\bigtriangledown ($\bigtriangledown$ math op.), *506*
\bigtriangleup ($\bigtriangleup$ math op.), *506*
\biguplus ($\biguplus$ large math op.), *175*, *511*
\bigvee ($\bigvee$ large math op.), *175*, *511*
\bigwedge ($\bigwedge$ large math op.), *175*, *511*
binary operations, 188, 195, *506*
  + and − rule, 191, 213, 216
  adding white space around, 155
  and alignment of displayed formulas, 218
  and breaking displayed formulas, 213, 216, 217
  created with \overset, 193
  created with \underset, 183
  defining, 195
    and subformulas, 216
  for congruences, 173
binary relations, **170**, 181, 188, **189**, 191, *503*, *504*
  adding white space around, 155
  and alignment of displayed formulas, 218
  and breaking displayed formulas, 217
  created with \overset, 183, 193
  defining, 195
  delimiters as, 170
  math delimiters as, 170
  negated, 181, **194**, *505*
\binom (math com.), 23, 159
binomial coefficients, 23, 159–160
  in inline and displayed math environments, 160
bitmap fonts, 543
Black, Alison, 553, 557
blackboard bold (math alphabet), 181, **197**, 390
\blacklozenge ($\blacklozenge$ math sym.), *508*
\blacksquare ($\blacksquare$ math sym.), *508*
\blacktriangle ($\blacktriangle$ math sym.), *508*
\blacktriangledown ($\blacktriangledown$ math sym.), *508*
\blacktriangleleft ($\blacktriangleleft$ binary rel.), *504*
\blacktriangleright ($\blacktriangleright$ binary rel.), *504*
blank
  lines
    in displayed math environments, 51, 153, 157, 215
    in inline math environments, 153
    in text environments, 118
    in top matter commands, 273
    in verbatim environments, 146
    terminating paragraphs with, 11, **64**, 99, 118, 144
  math delimiters, 168, 182
  math symbol for commutative diagrams (@), 240
blg (BibTeX log files), 441, **442**
block (beamer env.), 343
block comment, *see* comments
Blue Sky Research, 525, 543
blue spaces, *see also* tie, unbreakable spaces, nonbreakable spaces, 76
bm (pack.), 312
Bmatrix (subsid. math env.), **235**
bmatrix (subsid. math env.), **235**
\bmod ($\bmod$ math op.), **173**, *174*, *506*
body
  of books, 467
  of documents, 11, *36*, 37, 41, 68, 164, **248–268**
  of environments, 68
  of page, 268
  of presentations, 327
  of theorem environment, 46
bold
  font weight, 14, 89, *90*, **93**, 94, 95, **123**, 163, 184, **196**, *196*, 197, 301, 390, *516*
  math symbols, **197–199**, 301, 312
\boldsymbol (math font weight com.), 184, 197, **198**, 301, *512*
BOOK (bibl. entry type), 424, **429–430**
book (doc. class), xxxii, 253, *376*, 465, **466–473**, 474, 524, 525, 529
BOOKLET (bibl. entry type), 424, **435**
bookmarks=true (opt. of hyperref pack.), 320
bookmarks, in PDF documents, 321
books
  bodies of, 467
  document classes for, 253, 465, **466–473**, 474, 476, 524, 525, 529
    options of, 468
  final preparation of, 482–487
  in BibTeX database files, 429–430
  logical design of, 479–481
  numbering of structures in, 466
  sectioning of, **466–467**, 479

books (*continued*)
structure of, 467
top matter of, 251
writing with LaTeX, 465–487
`booktabs` (pack.), 140
`booktitle` (BibTeX database field), 425, 433
`\bot` (⊥ math sym.), *508*
bottoms, of text boxes, 405
`\bowtie` (⋈ binary rel.), *503*
`\Box` (□ math sym.), *508*
`\boxdot` (⊡ math op.), *506*
boxes, 107–115
and length commands, 405
around formulas, 205–206
commands for measuring, 406
invisible, *see* struts
multiline, 107
paragraph, 110–112
solid, 113–114, *see also* struts
text, 107–115
alignment of contents in, 107, 111
behave as single characters, 107
commands for, xxvi, 27, 33, 83, 99, **107**, 107–115, 138, 140, 154, 162–163, 181, 206, 241, 301
environments for, 107, 109, 112, 383, 384
fine tuning placement of, 115
framed, **109–110**
measurements of, *405*
single line, 107–109, 163
vertical alignment of, 111, 115
vertical alignment of, 111
`\boxminus` (⊟ math op.), *506*
`\boxplus` (⊞ math op.), *506*
`\boxtimes` (⊠ math op.), *506*
Braams, Johannes, xxxiii, 523, 547, 557, 559
braces
must be balanced, 72, 77, 87, 166, 462
special, 18, 49, 72, 73, 152, 153, 157
cannot overlap, 72–73
environments act as, 72
stretchable horizontal, 178–179
braces, curly (`{}`), 8, 14, 19, 23, 69–71, 158, 159, 180, 181, 188–190, 204, 216, 217, 279, 285, 366, 379
and command declarations, 367
as math delimiters, *167*, *509*
define scope, 71–73
in BibTeX entries, 424, 426, 427, 436
in `\index` commands, 462
in text ({ }), *77*, *81*, *518*, *530*
unbalanced, 21, 77
with `\def`, 378
brackets, square (`[]`), *8*, 62
as math delimiters, **24**, *167*, *509*
breaking formula lines within, 217
enclose optional arguments, **15**, 27, **69–70**, 123, 132, 135, 166, 331
with `\newcommand`, 370
`\breakhere` (`beamer` com.), 351
breaking
formulas, *see under* formulas
lines, *see under* lines
pages, *see under* pages
paragraphs, *see under* paragraphs
breve (˘ text accent), *79*, *516*
`\breve` ($\breve{x}$ math accent), *177*, *512*
Bringhurst, Robert, 67, 553, 557
browsers, *see under* Internet
`bst` (BibTeX style files), **421**, *421, 422*, 426, 437, 439
determine use of fields, 425
form of citations created by, 428
location of, 439
`\bullet` (• math op.), *506*
bullet (• text sym.), *81*, *518*
bulleted lists, 119
`\Bumpeq` (≎ binary rel.), *504*
`\bumpeq` (≏ binary rel.), *504*
Butcher, Judith, 553, 557
`\bysame` (bibl. com.), **266**, 375, 391, 442, 443

C

`\c` (ç cedilla text accent), *79*, *516*
© (copyright text sym.), *81*, *518*
`calc` (pack.), 312, 403, 406
calligraphic (math alphabet), 185, **197**, 301, 390, *512*
`\Cap` (⋒ math op.), *506*
`\cap` (∩ math op.), *506*
capitalization, in bibliographic databases, 266
`\caption`, 39, 52
in figures, 259
in tables, 259
optional argument of, 476
captions, 134, 476
in figures, 259
in lists, **120**, 476
in tables, 259
multiple, 259
caret (ˆ), *77*
Carlisle, David, xxxiii, 123, 136, 257, 259, 320, 368, 523, 559
caron (ˇ text accent), *79*, *516*
case-sensitivity
of BibTeX fields and entry types, 425
of command names, 14, **69**
of environment names, **69**

of `\label` arguments, 257
of sort keys in `\index` commands, 462
`cases` (subsid. math env.), 33, *208*, 210, **239**
page breaks in, 242
`\ccname` (redef. name), *376*
`CD` (subsid. math env.), 240–242
`\cdot` (· math op.), 23, **158**, *506*
`\cdots` (centered ellipsis), **160**, 186
cedilla (ç text accent), *79*, *516*
ceiling math delimiters, *167*, *509*
`center` (text align. env.), **8**, 106, **124**, 134, 227, 407
breaking lines in, 124
LaTeX definition of, 414
`\centerdot` (· math op.), *506*
centered ellipses, **24**, 160
`\centering` (alignment com. declaration), 54, **124**, 227, 327
centering text, 8, 14, 124
in columns in `tabular` environments, 135
in presentations, 54, 327
in tables, 134, 137
`centertags` (doc. class opt.), **298**
centimeter (`cm` abs. unit), 12, 15, 105, 107, 111, 403
`\cfrac` (math com.), **200**
`\chapter` (struct. com.), 253, 255, 304, **466**
arguments of, 466
numbering of
equations in, 466
in front and back matter, 467
`chapter` (counter), 399, *399*
`chapter` (BibTeX database field), 425
`\chaptername` (redef. name), *376*
and `hyperref` package, *323*
chapters
document class options to set start pages for, 468
grouping into parts, 466
in BibTeX database files, 436
in books, 466
numbering of, in front and back matter, 467
characters, *see also* glyphs
accented, 9, 15, 62, 69, **79–80**, 82, **176–178**, 183, 322, 416, 427
European, 15, **79–80**, *515–516*
following `verbatim` environments, 146
Greek, 181, 389–390, *502*
Hebrew, *501*
invalid, 9, 63
line ending, *see* line ending characters
math, 17, 63
special, **9**, **63**, **76–78**
accessing with `\symbol`, 77, 311
in `\index` commands, 457
treating text boxes as, 107
`\check` ($\check{x}$ math accent), *177*, *512*
checkers, spelling, 48, 495
Chen, Pehong, 449, 463, 557
`\chi` (χ Greek char.), *502*
`\circ` (∘ math op.), *506*
`\circeq` ($\circeq$ binary rel.), *504*
`\circlearrowleft` (↺ math arrow), *507*
`\circlearrowright` (↻ math arrow), *507*
`\circledast` (⊛ math op.), *506*
`\circledcirc` (⊚ math op.), *506*
`\circleddash` (⊝ math op.), *506*
`\circledS` (Ⓢ math sym.), *508*
circumflex (ˆ)
text accent, *79*, *516*
text symbol, *81*, *518*
`\citation` (aux. file com.), 441
citations, bibliographic, 29, 47, 255, **263**, **439**, 441
created by BibTeX styles, 428, **439**
hyperlinks in PDF files, 321
showing in margins, 257
`\cite` (bibliographic com.), 29, 47, 255, **263**, 441
multiple citations, 264
optional argument of, 264
showing contents, in margin, 313
showing labels in margins, 257
spaces in, 264
with BibTeX, 439
classes, document, *see* document classes
classification of math symbols, **188–189**, 195
`\cleardoublepage` (page breaking com.), 101
`cleardoublepage.sty` (sample file), 101
`\clearpage` (page breaking com.), **101**, **261**
clients
e-mail, 65
FTP, 538
`\cline` (table com.), *137*, 137–138, *138*
`cls` (doc. class files), 250, 375, 410
`\clubsuit` (♣ math sym.), *508*
CM (Computer Modern) fonts, *see* Computer Modern fonts
`cm` (centimeter abs. unit), 12, 15, 105, 107, 111, 403
`cmr10.tfm` (TeX font metric file), 529
coefficients, binomial, *see* binomial coefficients
collections, in BibTeX database files, 431–432
`\colon` (: math com.), 63, **191**
colophons, of books, 467
`\color` (`beamer` com.), 339, 349
color, in presentations, 348–350
`\colorbox` (`beamer` com.), 349
`colorlinks` (opt. of `hyperref` pack.), 320, 321
`column` (`beamer` env.), 348

columns
double
document class options for, 299, 307
figures spanning, 259
footnotes in, 313
tables spanning, 259
in presentations, 347–348
math
adjusted, 231–242
adjusting with `flalign` environment, 221
in aligned formulas, 219–231
specifying in `matrix` subsidiary environments, 233
multiple, **101**, 313, 523
separator (`&`), 25, 135, 220, 221
width of, in `tabular` environments, 136
`columns` (`beamer` env.), 348
combining
document class options, 308
encapsulators in `\index` commands, 455
command declarations, **73**, **90**, **124**, 137, 227
affecting multiple paragraphs, 90
do not take arguments, 73
for fonts, *see* font command declarations
scope of, **90**, **367–368**, 382
using in user-defined commands, 90, **367–368**
command files, *see also* `sty` files *and* packages, 250, **366**, **386–392**
commands in, 386
terminating, 392
commands, 67–74
`*`-ed form, 46, **69**, 98, 101, 103, 105, 129, 130, 148, 173, 195, 196, 242, 253, 322, 373, 382, 385, 439, 467, 473
arguments of, *see under* arguments *or* specific commands, 327
as tokens, 529
defining, *see* user-defined commands
delimited, *see* delimited commands
for boxes, *see under* boxes
for dates and times, *see* time commands
for expanding values, **80**, 87, 113, 400
for figures, *see under* figures *or* floats
for filling horizontal space, **106**, 113, 126, 186, 233, 235, 414
for floats, *see under* floats
for fonts, *see* font commands
for graphics, *see under* graphics
for indexing, *see under* indexing
for presentations, *see under* presentations, `beamer`, *and* FoilTEX
for tables, *see under* tables *or* floats
fragile, 74
protecting, **74**, 252, 253, 466, 475
generalized, *see* user-defined commands
global, *see under* scope
in preamble, *see under* preamble
length, *see* length commands
local, *see under* scope
logical design using, 52–53
long, 73
math, *see* math commands
names of, 68
case-sensitivity of, 14, **69**
primitive, *see* primitive commands
providing, 375
redefining, 374–375
scope of, *see under* scope
sectioning, *see* structural commands
short, **73**, 90, 273, 284
defining, 373–374
spacing, *see* spacing commands
start with \, 8, 14, **68**
structural, *see* structural commands
terminating, 19, **69**, **154**
TEX, *see under* TEX
text style, *see* text style commands
to avoid using, 94, 481
top matter, *see under* top matter
types of, 73–74
user-defined, *see* user-defined commands
commas (,), 9, 62
and italic correction, 92
in `\bibitem` commands, 266
in BIBTEX databases, 424, 425, 445
use in formulas, 155
`comment` (comment env.), **86–87**, 313, 387, 523
locating errors with, 87
nesting, 86
comments, **10**, 85–87
block comment, **6**, 50, 51, 86, 478, 494, 498
keyboard equivalents, 499
block uncomment, **6**, 494, 498
creating with `%` characters, 6, 21, 85, 86, 141, 294
creating with `comment` environments, **86–87**
finding errors using, 6, 19, 86, 366, 387
in BIBTEX database files, 86, 443
inserted using `kill` command, 141
marginal, **112–113**, 484
in double-sided documents, 112
in equations, 112
in multiline math environments, 112
space between, 404
width of paragraph box for, 113

removing end-of-line characters with, 84, 85, 458
commutative diagrams, **240–242**, 301
`comp.text.tex` (newsgroup), 542
`\complement` (∁ math sym.), *508*
components
building formulas from, 164–166
of formulas, 22–27, 157–166
of pages, 268
Comprehensive TEX Archive Network, *see* CTAN
computer, *see* Mac, PC, *and* UNIX
Computer Modern (CM) fonts, 89, **89**, 93, 544, 545
bold extended, 89
ligatures in, 79
math bold italic, 196
math italic, 196
PostScript versions of, 523, 525, **543**
roman, 89, 196, 529
sans serif, 89
typewriter, 78, *78*, 89
conference proceedings, in BIBTEX database files, 424, 430–432
`\cong` (≅ binary rel.), *503*
congruences, 24, 173
as binary operations, 173
consecutive numbering, of proclamations, 127–128
contents, table of, *see under* tables
`\contentsline` (`toc` file com.), 473
`\contentsname` (redef. name), *376*
context, affects style of emphasized text, 91
continued fractions, 200
`\contrib` (top matter com.), 276
`contrib` (LATEX distr. directory), 540
controls, float, 134, **260–261**
conventions for labels
in bibliographies, 48
of equations, 28
of sections, 46
converting
files
from DVI to PostScript, 318
from PostScript to PDF, 319
from articles to presentations, **53**, 326
`\coprod` (∐ large math op.), *175*, *511*
`\copyright` (© copyright), *81*, *518*
corner math delimiters (⌞, ⌟, ⌜, ⌝), *167*, *509*
corollaries, *see* proclamations
correction, italic, *see* italic correction
`\cos` (cos math op.), *172*, *510*
`\cosh` (cosh math op.), *172*, *510*
`\cot` (cot math op.), *172*, *510*
`\coth` (coth math op.), *172*, *510*
counters, 123, 233, 377, **399–403**
and `\include` commands, 400
and `\label` commands, 402
and proclamations, 399
arithmetic with, 312, **402–403**
defined in preamble, 400
defining, 400
incrementing, 402
LATEX, *399*
linking with other counters, 400, 401
names of, 128
store numbers, 399
styles for, 87, 123, 382, *401*, **400–401**, 411
values of, 87, 400
printing, **80**, 113, **400**
setting, 399–400, 402
with `list` environments, 411
Courier, in LATEX documents, 544
cross-referencing, 47–48, **255–258**, **267**, 322
among multiple documents, 313
and automatic renumbering, 28, 536
entries made in auxiliary files for, 443, 531
in indexes, 457
in `proof` environment titles, 132
inside presentations, 328
labels for, 28, 31, 46, 50–51, 202, 215, 231, 252, **255**, 259, 267, 402
of equations, **28**, 27–29, 31, 156, 202, 203, 219, 256
groups of, 218–219
in multiline math environments, 215
of list items, 119, 123
of tables, 134
page numbers, 28, 31, 202, **258**, 267, 484, 531
with `varioref` package, 313
section numbers, 28, 31, 46, 123, 132, 134, 156, 202, 215, 252, **255**, 301, 531
using ties (~) with, 28, **66**, 257
within BIBTEX databases, 432–433
`crossref` (BIBTEX database field), 425
`\csc` (csc math op.), *172*, *510*
CTAN (Comprehensive TEX Archive Network), 310, 537, **538–540**, 542, 544, 546, 553
catalogue, 539
LATEX distribution on, 539
mirrors of, 540
packages on, 464, 540
`\URL`s for, 538
`\Cup` (⋓ math op.), *506*
`\cup` (∪ math op.), *506*
`\curlyeqprec` (⋞ binary rel.), *504*
`\curlyeqsucc` (⋟ binary rel.), *504*
`\curlyvee` (⋎ math op.), *506*
`\curlywedge` (⋏ math op.), *506*

`\curraddr` (top matter com.), 278
  rules for using, 277
`\curvearrowleft` (↶ math arrow), *507*
`\curvearrowright` (↷ math arrow), *507*
customizing
  article templates, 44–45
    for AMS document classes, 294–297
    preambles of, 44, 294
    top matter of, 44, 294
  indentation of text, 103
  LaTeX, 363–417
    dangers of, 415–417
  lists
    and counters, 411
    defining new, 406–415
  theorem styles, 131
`cyrillic` (LaTeX distr. directory), 311
`cyrillic` (pack.), 312

D
`\d` (̣ underdot text accent), *79*, *516*
`\dag` († dagger)
  math symbol, *508*
  text symbol, *81*, *518*
`\dagger` († math op.), *506*
`\daleth` (ℸ Hebrew char.), *501*
Dante (German TeX user group), 541
dashes, 62
  em dash (—), **14**, **75**, *81*, *518*
  en dash (–), **14**, **75**, *81*, *518*
    in BibTeX databases, 427
`\dashleftarrow` (⇠ math arrow), *507*
`\dashrightarrow` (⇢ math arrow), *507*
`\dashv` (⊣ binary rel.), *503*
databases, BibTeX, *see also* `bib`, 421, **423–437**, 440
`\date` (top matter com.), 37, 44, 80, 87, 249, 275, 304, 469
  with `letter` document class, 309
`\datename` (redef. name), *376*
dates
  commands for, *see also* `\date` *and* time commands, 14, 37, 44, 70, **80**, 275, 548
  LaTeX release, 86, 251, 532
  of packages, 533
`\day` (time com.), 80
`\dbinom` (display-style binomial com.), 160
`dcolumn` (pack.), 136, 313
`\ddag` (‡ dagger)
  math symbol, *508*
  text symbol, *81*, *518*
`\ddagger` (‡ math op.), *506*
`\ddddot` ($\ddddot{x}$ math accent), *177*, *512*
`\dddot` ($\dddot{x}$ math accent), *177*, *512*
`\ddot` ($\ddot{x}$ math accent), *177*, *512*
`\ddots` (⋱ diagonal ellipsis), 161, 235
decimals, alignment on, 136, 313
declarations, command, *see* command declarations
`\DeclareMathOperator` (op. def. com.), 173, 195, 196, 198, 250, 301
`\DeclareMathOperator*` (op. with limits def. com.), 173, 195
declaring, types of math symbols, 195
`\dedicatory` (top matter com.), 275
`\def` (TeX com.), 416
  defining commands with, 378
  overwriting previously defined commands with, 378
`definition` (procl. style), **129**, 129–131
definitions, *see* proclamations
`\deg` (deg math op.), *172*, *510*
`delarray` (pack.), 313
delimited commands, 378–380
  invoking, 378
delimiters
  for displayed math environments, 18
  for inline math environments, 18, 74, 152–153
  for `\verb` commands, 147
  in BibTeX database files, 424
  math, *see* math delimiters
`\Delta` (Δ Greek char.), *502*
`\delta` (δ Greek char.), *502*
depth
  of tables of contents, 403
  of text boxes, 108, 111, 405, *405*
`\depth` (length com.), 108, **108**, 111
`description` (text list env.), 118, 120–121
design
  logical, 52–53
    of books, 479–481
  of document classes, 522
  visual, 52–53, 268–270, 358
`\det` (det math op.), *172*, *510*
device independent files, *see* DVI files
`\dfrac` ($\frac{x}{y}$), 158, **186**, 200
`\DH` (Eth Eur. char.), *519*
`\dh` (eth Eur. char.), *519*
`\diagdown` (╲ math sym.), *508*
diagonal ellipses, 235
diagrams, commutative, *see* commutative diagrams
`\diagup` (╱ math sym.), *508*
`\Diamond` (◇ math sym.), *508*
`\diamond` (⋄ math op.), *506*
`\diamondsuit` (♢ math sym.), *508*

dieresis, *see* umlaut
diesis (♯)
  math symbol, *506*, *508*
  text symbol, *81*, *518*
`\digamma` (*F* Greek char.), *502*
`\dim` (dim math op.), *172*, *510*
dimensions, *see also* measurements
  units for measuring, 12, 15, 89, 93, 95, 96, 105, 107, 111, *190*, 308, 403, *513*
    with length commands, 404
directories, *see under* AMS and LaTeX distributions
`\displaybreak` (display break com.), 242, 243
  optional argument of, 243
displayed formulas, *see* displayed math environments
displayed fractions, *see under* fractions
displayed math environments, 17, 25, 27–33, **152**
  `\[` (start math mode), 18, **152**
  Visual Guide to, **207**, *208*
  `\]` (end math mode), 18, **152**
  act as special braces, 152
  `align`, 30–31, 33, *208*, 210, **219–224**, 230, 242
  `align*`, 31, 221, 226
  `alignat`, *208*, 210, **224–226**
  blank lines in, 51
  breaking pages in, **242–243**
  `displaymath`, 152, 153, 156, 157, 231
  `eqnarray`, 222
  `equation`, 27, 33, **156–157**, 201, 231, 328
  `equation*`, 157, **157**, 201, 231, 328
  `flalign`, *208*, 210, **221**
  font size in, 199
  `gather`, *208*, 210, **211–212**, 219, 242
  `gather*`, 211
  in direct succession, 482
  inline-style binomials in, 160
  `multline`, *208*, 210, **212–214**
  `multline*`, 213–214
  `subequations`, **203**, 204, 219, 401
displayed text environments, 117, 143–147
  `alltt`, 159, 311
  blank lines in, 118
  `multicols`, 101, 523
  `proof`, 39
  `quotation`, **144**
  `quote`, **143**
  `tabbing`, **141–143**, 551, 552
  `tabular`, 78, **133–140**, 237, 259, 312, 313, 523, 551, 552
  `theorem`, 37, 46, 52, 125, 128, 343, 384
  `verbatim`, **145–147**, 148, 313
  `verse`, **144–145**
  `xcb`, 476
`displaymath` (disp. math env.), 152, 153, 156, 157, 231
`\displaystyle` (math font size com.), **199**, 204
dissertations, in BibTeX database files, **433–434**
distributions
  AMS packages, 271, **300–302**, 325, 380, 417, 436, 437, 521, 528, 553
  LaTeX, 78, 86, 257, 303–308, **310–313**, 489, 525, 528, **529**, 532, 534, 539, 540, 547, 553
  PSNFSS, 544–545
  TeX, 528
`\div` (÷ math op.), **158**, *506*
`\divideontimes` (⋇ math op.), *506*
division, 22, 63, 158, 191, *506*
`\DJ` (Dyet Eur. char.), *519*
`\dj` (dyet Eur. char.), *519*
`doc` (LaTeX distr. directory), 311
`document` (text env.), 11, **37**, 41, 68, 164, 248
document class options
  `9pt`, **297**
  `10pt`, **104**, **297**, **306**
  `11pt`, **297**, **306**
  `12pt`, **93**, **297**, **306**
  `a4paper`, 298, 306
  `a5paper`, 306
  are passed on to packages, 250
  `b5paper`, 306
  `centertags`, **298**
  combining, 308
  `draft`, 13, 96, 249, 300, **306**
  `executivepaper`, 306
  `final`, 300, 306
  `fleqn`, **298**, 307
  for AMSFonts, 300
  for bibliographies, **308**, *308*
  for double-column documents, 299, 307
  for double-sided printing, 299, 307, 468
  for font sizes, 297, 306
  for page orientation, 307
  for position of equation numbers, 298, 307
  for start of chapters, 468
  for title pages, 299, 307, 468
  `handout`, 358
  `landscape`, 307
  `legalpaper`, 85, 298, 306
  `leqno`, **298**, 307
  `letterpaper`, 298, 306
  `noamsfonts`, 300
  `nomath`, **300**
  `notitlepage`, **299**, 307, 468
  `onecolumn`, 299, 307
  `oneside`, **299**, 307, 468

document class options (*continued*)
openany, 468
openbib, **308**, *308*
openright, 468
psamsfonts, 300
reqno, **298**, 307
tbtags, **298**
titlepage, 249, **299**, 307, 468
trans, 358
twocolumn, 85, 101, 259, **299**, 307, 308, 313
twoside, 85, 249, **299**, 307, 308, 468
document classes, 53, 82, 125, *376*, 528, 529
amsart, 36, 82, 118, 125, 249–251, 254, **271–302**, 465, 469, 525, 529, 536
amsbook, xxxii, 253, 465, 468, 469, 476, 525, 529
amsproc, 273, 529
anatomy of, 35–43
article, 35–43, 249, 251, 254, 263, *265*, 273, 302, 303, **303–308**, 525, 529
beamer, 325–359
book, xxxii, 253, 465, 469, 474, 524, 525, 529
changing, 536
cls files, 250, 375, 410
design of, 522
determine
placement of equation numbers, 298, 307
position of equations, 298, 307
spacing, 102
foils, 53
for books, 253, 465, **466–473**, 474, 476, 524, 525, 529
options of, 468
for presentations, *see under* FoilTEX *and* beamer
legacy, 54, 118, 249, 254, 263, 273, 302, *305*, **303–313**, 529
letter, 308–310, 529
options of, *see* document class options
proc, 529
proc-l, 272
report, 253, 303, **303–308**, 529
sample, 10
sample.cls, 11
slides, 303, 529
document font families, 8, 14, *90*, **89–90**, **93**, **123**, 163, 301, 390, 412, *516*, 544
normal, 90
roman, **89**, 544
sans serif, **89**, 544
typewriter style, **89**, 544
document parameters, for page design, 552
documentation
for AMS document classes and packages, 552
for beamer document class, 325, 358
for LATEX, 311, 552
packages, 312
for New Font Selection Scheme (NFSS), 553
\documentclass (preamble com.), 4, 13, 35, 36, 53, **70**, 85, 180, 249, 294, 326, 355
and \NeedsTeXFormat command, 250
documents
body of, 11, *36*, 37, 41, 68, 164, **248–268**
cross-referencing among multiple, 313
design of, 268–270
LATEX, 247–270
on the Internet, 317–323
using AMS document classes in, 271
legacy, 319
master, 477–479
preamble of, 249–251
printing and viewing, 5, 318, 530
readability of, 93, 358
splitting into multiple files, 476–479
dollar sign ($), *see also* $ *and* \$, **9**
as inline math delimiter, 17, 18, 33, 74, 152, **152**, 518
as text symbol, *77*, *81*
Doob, Michael, 110, 528, 557
\dot ($\dot{x}$ math accent), *177*, *512*
\doteq ($\doteq$ binary rel.), *503, 504*
\dotfill (space fill com.), 106
dotless i and j (ı and ȷ), **79**, *79*, *516*
\dotplus ($\dot{+}$ math op.), *506*
\dots (… math ellipsis com.), 24, 78, 160–161, 186
dots, filling lines with, 106
\dotsb ($\cdots$ math com.), 161
\dotsc (… math com.), 161
\dotsi ($\cdots$ math com.), 161
\dotsm ($\cdots$ math com.), 161
\dotso (… math com.), 161
double accents, in math, **177**
double acute (˝ text accent), *79*, *516*
double dagger (‡)
math symbol, *506*, *508*
text symbol, *81*, *518*
double guillemet, *519*
double quote ("), 9, *see also* quotation marks, **75**, *81*, *518*
in \index commands, 457
in BIBTEX database fields, **424**, 445, **446**
key, 9, 63, 75
double spacing, 99

double subscripts and superscripts, font size of, 199
double vertical lines in CD environments, 241
double-column
  documents
    and footnotes, 313
    document class options for, 85, 299, 307
  figures and tables, 259
double-sided printing
  and marginal comments, 112
  document class options for, 85, 299, 307, 468
\doublebarwedge ($\barwedge$ math op.), *506*
\doublecap ($\Cap$ math op.), *506*
\doublecup ($\Cup$ math op.), *506*
\doublespacing (setspace com.), 99
\Downarrow ($\Downarrow$)
  math arrow, *507*, *509*
  math delimiter, *167*
\downarrow ($\downarrow$)
  math arrow, *507*
  math delimiter, *167*, *509*
\downdownarrows ($\downdownarrows$ math arrow), *507*
Downes, Michael, 447, 523, 524
\downharpoonleft ($\downharpoonleft$ math arrow), *507*
\downharpoonright ($\downharpoonright$ math arrow), *507*
draft (doc. class opt.), 13, 96, 249, 300, **306**
drivers
  printer, 312, 320, 526, **530**, 539
  video (DVI viewer), 526, 530
Duchier, Denys, 523
Dupré, Lyn, 85, 553, 557
DVI files, 526, 530, 539
  converting to PostScript, 318
  printing, 530
  viewing, 526, 530
dvipdf (opt. of hyperref pack.), 320
dvipdfm (opt. of hyperref pack.), 320
dvipdfmx (opt. of hyperref pack.), 320
dvips (opt. of hyperref pack.), 320
dvipsnam (opt. of xcolor pack.), 349
dvipsone (opt. of hyperref pack.), 320
dviwindo (opt. of hyperref pack.), 320
dyet (Eur. char), *519*

E

e-mail, *see* \email
e-mail clients, 65
editing cycle, 4–6
  Mac, 498
  PC, 491
edition (BibTeX database field), 425
editor (BibTeX database field), 425
editors, text, xxvi, 4, 5, 9, 18, 48, 55, 63, 84, 88, 365, 490, 526
Eijkhout, Victor, 553, 557
electronic mail address, *see* \email
\ell (ℓ math sym.), *508*
ellipses (. . .)
  centered ($\cdots$), **24**, **160**
  diagonal, 235
  in math, **24**, **160–161**, 233
  in text, **78**
  vertical, 235
\em (font shape com. dec.), *90*, 91, 92, 123, 367, 382, *516*
em (font shape env.), 123
em (rel. unit), 403, *513*
em dash (—), **14**, **75**, *81*, 83, *518*
EM fonts, *see* European Modern fonts
\email (top matter com.), 278, 281–283, 295, 296
  rules for using, 278
\emph (font shape com.), 8, 14, 68, *90*, **91**, 337, *516*
emphasized (font shape), 8, 14, 28, 68, *90*, **91**, 92, **123**, 125, 156, 367, 382, *516*
  and italic correction, 92
  context dependence of, 91
empty (page style), 268
empty group ({}), 39, 55, 70, 159, 179, 188, 189, 194, 204, 279, 309
\emptyset ($\emptyset$ math sym.), *508*
en dash (–), **14**, *81*, 83, *518*
  in BibTeX databases, 427
Encapsulated PostScript (EPS), *see* EPS
\enclname (redef. name), *376*
encodings, font, *see* font encodings
\end (end of env.), 67, **68**, 72
  errors with, 72, 146, 478
end-of-line characters, *see* line ending characters
\endinput (input ending com.), 392, **478**
eng (Eur. char), *519*
\enlargethispage (spacing com.), **101**, 484, 487
\enlargethispage* (spacing com.), 101
\ensuremath (math mode com.), **369**, 370, 375
Enter key, *see* Return key
entries
  bibliographic, *see under* bib
  glossary, *see under* glossaries
  index, *see under* indexing
enumerate (list text env.), 313, 382
enumerate (pack.), 123, 313, 382, 387
enumi (counter), 123, *399*
enumii (counter), *399*
enumiii (counter), *399*
enumiv (counter), *399*

environments, 8, 14, 18, **67–74**
*-ed forms, 157, 201, 211, 213, 215, 231, 259
act as braces, 72
arguments of, *see under* arguments *or* specific environments
\\ in, 124, 145
begin with \begin, **68**, 72
body of, 68
case-sensitivity of names of, **69**
end with \end, **68**, 72
font size, 123
for presentations, *see under* beamer *and* FoilTEX
for proclamations, *see* proclamations
for tables, *see* tables
indenting contents of, in source file, 155
legacy, 123, 143–145, 407
list, *see* list text environments
logical design using, 535
typesetting environment names, 535
math, *see under* inline and displayed math environments, subsidiary math environments, *and* displayed text environments
modifying, 380–383
\newline in, 98
operating, *see under* PC, Mac, *and* UNIX
short, 385
subsidiary math, *see* subsidiary math environments
text, *see* displayed text environments, list text environments, *and* text environments
user-defined, *see* user-defined environments, *see* user-defined environments
visual design using
typesetting environment names, 535
EPS (Encapsulated PostScript)
files, 476, 483, 496
format, 39, **259**, 483, 552
\epsilon (ϵ Greek char.), *502*
\eqcirc (≖ binary rel.), *504*
eqnarray (math align. env.), 222
\eqref (cross-ref. com.), **28**, 29, 31, 156, 202, 203, 215, 219, 255, 256, 263, 328, 370
\eqslantgtr (⪖ binary rel.), *504*
\eqslantless (⪕ binary rel.), *504*
equals (=)
binary relation, 63, *503*
in BIBTEX database fields, 424
key, 8
equation (counter), **399**, *399*
equation (disp. math env.), 27, 33, **156–157**, 201, 231, 328
blank lines in, 157
equation* (disp. math env.), 157, **157**, 201, 231, 328
\equationname (hyperref redef. name), *323*
equations, 27–29
document class options for placement of numbers, 298, 307
grouping, 203–204
in multiline math environments, 215
in presentations, 328
labels for, **28**, 256
marginal comments in, 112
numbering of, **27–29**, 55, **156–157**, 201, 211, 213, 215
groups, 218–219
in chapters of books, 466
preventing, 30, 31, 157, 201, 211, 213, 215, 218, 231
variants, **203**, 218
within sections, 156, 250
position of, 298, 307
systems of, 225–226
tagging, 29, **201–204**, 211, 213, 215, 218, 230, 231
\equiv (≡)
binary relation, *503*
math operator, 24, *174*, 182, 371, 379
error messages, 5, *see also* warning messages, 48–52, 534
Argument of *xxx* has an extra }, 146
Bad math environment delimiter, 132, 153, 475
\begin{document} ended by \end{*xxx*}, 87, 146
\begin{split} not allowed here, 231
\begin{*xxx*} on input line *xx* ended by \end{*yyy*}, 49, 50, 72
Can be used only in preamble, 250
Command \xxx already defined, 367, 376, 381
Display math should end with $$, 51
Double superscript, 158
Environment *xxx* undefined, 381
Extra alignment tag has been changed to \cr, 237
Extra }, or forgotten *xxx*, 73, 223
File ‘*xxx*’ not found, 534
I was expecting a ‘,’ or a ‘)’, 445, 446

`Illegal character in array arg`, 237
`Illegal unit of measure (pt inserted)`, 114
`Incomplete \iffalse; all text was ignored after line` *xx*, 309
`Invalid use of \`*xxx*, 162
line numbers in, 6, **9**, 153, 154
`Misplaced \xxx`, 135, 227, 233
`Missing \begin{document}`, 126
`Missing control sequence inserted`, 404
`Missing $ inserted`, 20, 51, 147, 153, 154, 157, 233
`Missing number, treated as zero`, 98, 111
`Missing \right. inserted`, 217
`Missing } inserted`, 21, 49, 223
`No counter '`*xxx*`' defined`, 400
`Paragraph ended before \`*xxx* `was complete`, 49, 50, 114, 126, 237, 373, 379, 462
recorded in `log` file, **526**
`Runaway argument?`, 49, 126, 237, 284, 379, 462
showing paragraph breaks in, 99
`Something's wrong--perhaps a missing \item`, 120, 263
`\tag won't work here`, 215
`Text line contains an invalid character`, 9, 52, 64
`Too many }'s`, 21, 72, 285
`Undefined control sequence`, 44, 50, 71, 282, 284, 367
`Underfull \hbox`, **97**, 530
`Use of \`*xxx* `doesn't match its definition`, 379
`\verb command ended by end of line`, 148
with BIBTEX, 443–446
in `log` (`blg`) files, 442
`You're missing a field name`, 444
eszett (ß, SS), *81*, *515*, 548
`\eta` (η Greek char.), *502*
`\eth` ($\eth$ math sym.), *508*
eth (Eur. char), *519*
`eucal` (pack.), 301, 302, 386, 512
options, **301**, 390, 512
`eufrak` (pack.), 302
Euler Fraktur (math alphabet), 180, **197**, 301, 302, 390, *512*
Euler Script (math alphabet), **301**, 302, 390, *512*
European
accents, 15, **79–80**
characters, 15, **79–80**, *515–516*, *519*
quotation marks, *519*
European Modern (EM) fonts, 524
`ex` (rel. unit), 403
examples
of bibliographies, **40–41**, **43**, 47, **261–263**, **421–423**
of indexes, 450–452
of nonbreakable spaces (`~` spacing com.), 76
of top matter commands, 282–285
`\except` (table of contents com.), 473
exclamation marks (!), 9, 62
as float control, **260**, 486
in `\index` commands, 453, 454, 457
Spanish (¡), *81*, *515*, *518*
terminating sentences with, 64–67
`executivepaper` (doc. class opt.), 306
exercises, 476
in books, 476
within a section, 476
`\exists` ($\exists$ math sym.), *508*
exiting, from interactive mode, 491, 534
`\exp` (exp math op.), *172*, *510*
expanding values of counters, 80, **400**
`exscale` (pack.), 301, 311
extensibility of LATEX and TEX, 525

F

Fairbairns, Robin, 523
`\fallingdotseq` ($\fallingdotseq$ binary rel.), *504*
`fancyhdr` (pack.), 270, 537, 540
FAQ (Frequently Asked Questions), 539, 542
`\fboxrule` (length com.), 110
`\fboxsep` (length com.), 110
`\fcolorbox` (`beamer` com.), 349
`fd` (font def. file), **544**, 545, 546
Fear, Simon, 140
fields, bibliographic, *see under* `bib`
`figure` (counter), *399*
`figure` (float env.), 39, **259–260**, 327
optional arguments of, 260, 486
placement of, 484, 486
`figure*` (float env.), 259
`\figurename` (redef. name), **375**, *376*
and `hyperref` package, *323*
figures, **259–260**
captions in, 476
fragile commands in, 74
commands for, **259**, 476, **479**
double-column, 259
forcing typesetting of, 101
lists of, *see also under* lists, 475–476
adding a line to, 476
fragile commands in, 74

figures (*continued*)
numbering of, 258, 259
old-style, 62
placement of, **260**, 484, 486
file formats, for graphics
EPS, 39, **259**, 483, 496, 552
PDF, 39, **259**, 326
file transfer protocol, *see* FTP
`fileerr` (pack.), 313
files
MakeIndex log, *see* `ilg`
auxiliary, *see* `aux`
BibTeX databases, *see* `bib`
BibTeX log, *see* `blg`
BibTeX style, *see* `bst`
class (`cls`), *see under* document classes
command, *see* command files
converting from articles to presentations, **53**, 326
documents composed of multiple, 476–479
DVI, *see* DVI files
Encapsulated PostScript, *see* EPS
font definition, *see* `fd`
font metric, *see also* `tfm`, *see under* font metrics
glossary, *see* `glo`
`hyperref` bookmarks, *see* `out`
hyphenation pattern, *see under* hyphenation
including in other files, 386, **478**
index entry, *see* `idx`
list
of figures, *see* `lof`
of tables, *see* `lot`
listing those used by a document, 387
log, *see* `log` files
naming of, 44
with `\graphicspath` command, 479
organization of, 476–479
package source, *see under* packages
portability of, 9
Portable Document Format, *see* PDF, *see* PDF
PostScript (PS), *see under* PostScript
processed bibliography, *see* `bbl`
processed index, *see* `ind`
sample, *see* sample files
source, *see* source files
start on new page with `\include` command, 478
style, *see* `sty`
tables of contents, *see* `toc`
terminating, 392, **478**
filling horizontal space, **106**, 113, 126, 186, 233, 235, 414
`final` (doc. class opt.), 300, 306
final preparation, of books, 482–487
fine tuning
of mathematical formulas, 190–192
placement of root with `\sqrt`, 162
placement of text boxes, 115
`\Finv` (⅁ math sym.), *508*
fixed-size math delimiters, 168
`fixltx2e.dtx`, 311
`fixltx2e.ins`, 311
`fixltx2e.sty`, 311, 312
`flalign` (math align. env.), *208*, 210, **221**
`\flat` (♭ math sym.), *508*
`fleqn` (doc. class opt.), **298**, 307
floats, *see also* tables *and* figures, 258–261
commands, 259, 260
controls, 134, **260–261**
environments, 133, **258–260**
`figure`, 39, **259–260**, 260, 327
`figure*`, 259
locating, 484, 486
`table`, 134, **258**, 260
`table*`, 259
forcing typesetting of, 101
specifying placement of, **260**, 484
floor math delimiters, *167*, *509*
flush left
alignment of formulas, 209, 210, 212, 214, 221, 307
column alignment, 231–232, 236
columns in `tabular` environments, 135
setting equations, 298, 307
flush right
alignment of formulas, 209, 210, 212, 214, 221
alignment of text, 106
column alignment, 231–232, 236
columns in `tabular` environments, 135
setting equations, 298, 307
`flushleft` (text align. env.), **8**, **124**, 407
breaking lines in, 124
`flushright` (text align. env.), **8**, 68, **124**, 407
breaking lines in, 124
`\fnsymbol` (footnote counter style com.), 87
`\foilhead` (FoilTeX com.), 53, 55
optional argument of, 56
`foils` (doc. class), 53
FoilTeX, 53
commands for, 55
folders, 3
`samples`, *see* `samples`
structure of, 477–479
`work`, *see* `work`
font command declarations, *see also* font commands, 90

for shape
\em, *90*, 91, *92*, 123, *516*
\itshape, *90*, **91**, 92, 94, 123, 412, *516*
\normalfont, **90**, *90*, 123, 163, *516*, 545
\rmfamily, *90*, 123, *516*
\scshape, *90*, **91**, 123, *516*
\sffamily, *90*, 94, 123, *516*
\slshape, *90*, **91**, 92, 94, 95, 123, *516*
\ttfamily, *90*, 123, 142, *516*
\upshape, *90*, **91**, 123, 382, 412, *516*
for weight
\bfseries, **71**, 73, *90*, **93**, 94, 95, 123, *516*
\mdseries, *90*, **93**, *516*
font commands, *see also* font command declarations
and italic correction, 90, 92
and *MakeIndex*, 90
for selecting fonts using family names, 544
for series
\textmd, *90*, **93**, *516*
for shape
\emph, 14, 68, *90*, **91**, 337, *516*
\textit, *90*, **91**, *337*, *516*
\textnormal, **90**, *90*, 163, *516*
\textrm, *90*, 301, *516*
\textsc, *90*, **91**, *516*
\textsf, *90*, *516*
\textsl, *90*, **91**, *516*
\texttt, 14, 76, *90*, *516*
\textup, *90*, **91**, *516*
\upn, 156
for size
\footnotesize, *93*, **94**, *517*
\Huge, **93**, *93*, *517*
\huge, **93**, *93*, *517*
\LARGE, **93**, *93*, *517*
\Large, **93**, *93*, 94, *517*
\large, **93**, *93*, *517*
\larger, **94**
\normalsize, **93**, *93*, *517*
\scriptsize, **93**, *93*, *517*
\SMALL, **93**, *93*, *517*
\Small, **93**, *93*, *517*
\small, **93**, *93*, *517*
\Tiny, **93**, *93*, *517*
\tiny, **93**, *93*, *517*
for weight
\textbf, 14, 73, *90*, **93**, 163, 301, 337, *516*
low-level, 95
math, *see* math font commands
obsolete, **94**
orthogonality of, **94**
two-letter (obs. LaTeX 2.09), and italic correction, 95
using in math environments, 163
font encodings, **78**, *78*
koi8-u, 548
LY1, 545, 546
OT1, 544
T1, 82, *519*, 547
font environments
for series
bfseries, 123
for shape
em, 123
itshape, 123
rmfamily, 123
scshape, 123
sffamily, 123
slshape, 123
ttfamily, 123
upshape, 123
for weight
bfseries, 123
font families, document, *see* document font families
font metrics files, 318, **529**, 544, 545
font series, 89, **93**
command declarations for, *see* command declarations
commands for, *see under* font commands
environments for, *see under* font environments
font shapes
command declarations for, *see under* font command declarations
commands for, *see under* font commands
environments for, *see under* font environments
sans serif, 89
serif, 89
font substitution, 94, 318, 484
warning messages, 94
font weight, 89
command declarations for, *see under* font command declarations
commands for, *see under* font commands
environments for, *see under* font environments
font width, 89
fontenc (pack.), **545**, 547, 548
\fontfamily (font selection com.), 544

fonts
  AMSFonts, 300, **301–302**, 525, 528
    document class options for, 300
    obtaining, 540
    PostScript versions of, 300, 301, 524, 525, 533
    technical support for, 542
    updates to, 533
  bitmap, 543
  blackboard bold, 181, **197**, 390
  bold math, 184, **196**, *196*, **197**, *512*
  calligraphic, 185, **197**, 301, 390, *512*
  commands, *see under* font commands *and* font command declarations
  Computer Modern, *see* Computer Modern
  Courier (typewriter shape), 317, 496, 544
  encodings, *see* font encodings
  Euler Fraktur, 180, **197**, 301, 302, 390, *512*
  Euler Script, **301**, 302, 390, *512*
  European Modern (EM), *see* European Modern fonts
  for text in math mode, 163
  Helvetica, 89, 544
  including in PDF files, 318
  including in PostScript files, 317
  Lucida Bright, 543, 546
  math, 195–197
    size of, 199
  monospaced, 88
  names of
    LaTeX 2.09, 313
    PSNFSS (Berry scheme), 544
  PostScript, *see under* PostScript
  proportional, 88
  proprietary
    using in PDF files, 318
    using in PostScript files, 317
  samples, 313
  selecting, 88–95
    with `\fontfamily` command, 544
    with `\selectfont` command, 95, 544
  shapes, *see* font shapes
  size of, 55, 89, *93*, **93–94**, 123, *517*
    document class options for, 297, 306
  sources for, *546*
  substitution of, 94, 318, 484
  Times, 89, 544–545
  typewriter style, 88
  weight, *see* font weight
  width, *see* font width
`fontsmpl` (pack.), 313
`fonttbl.tex` (sample file), 78, 134
footers, page, 268–270
`\footnote`, 87
`footnote` (counter), *399*
footnotes, 87–88
  and double-column documents, 313
  fragile commands in, 74
  in `minipage` environments, 112
  indicated by symbols, 87
  on title pages, 87
  unmarked, 44, 279
`\footnotesize`, *93*, **94**, *517*
`\forall` (∀ math sym.), *508*
forcing
  floats to typeset, 101
  indentation, 99
formats
  LaTeX, 529
  TeX
    creating with `initex`, 528
    files read by `virtex`, 528
    Plain TeX, 528
formats, file, *see* file formats
formatting of documents, determined by document classes, 61
`formula.tex` (sample file), 164–166
formulas, 18
  adjusted, 210, **231–242**
    flush left and right, 214
  aligning, **30–32**, 209–210, **219–231**, 242, 298, 524
    multiline, 217–218
    rules for, 217–218, 221
    text in, 226–227
  annotating, 225
  boxed, *see under* boxes
  breaking into multiple lines, 30–31, **217–218**
    displayed, 483
    rules for, 217
  commas in, 155
  components of, 22–27, 157–162
    building using, 164–166
  displayed, *see* displayed math environments
  gallery, 180–186
  grouping, 210, **211–212**
  inline, *see* inline math environments
  multiline, **30–32**
    splitting, 212–214
  numbering, *see under* equation
  specifying fonts for, 163
foundries, type, 544, *546*
`\frac` ($\frac{x}{y}$), 19, 21, 23, 70, **158**, 186, 200
fractions, 19, 21, 23, 70, **158**, 186
  continued, 200
  displayed, **158**, 186
  generalized, 204–205
  inline, 158

fragile commands, 74
protecting, **74**, 252, 253, 466, 475
`frame` (`beamer` env.), 327, 328, 344
`\framebox`, 109
frames, *see also under* presentations, **327**, 358
environments of, 327
outline (table of contents), 328
titles, 327, 358
`\frametitle` (`beamer` com.), 327, 328, 344
`\frenchspacing` (spacing com.), 67
Frequently Asked Questions (FAQ), 539, 542
front matter, 467
numbering of chapters in, 467
of AMS documents, 285
of books, **473–475**
`\frontmatter` (struct. com.), 467
`\frown` ($\frown$ binary rel.), *503*
`ftnright` (pack.), 313
FTP (File Transfer Protocol), 538

G

`\Game` ($\Game$ math sym.), *508*
`\Gamma` (Γ Greek char.), *502*
`\gamma` (γ Greek char.), *502*
`gather` (disp. math env.), *208*, 210, **211–212**, 219, 483
page breaks in, 242
rules for, 211
`gather*` (disp. math env.), 211
`gathered` (subsid. math env.), 211, 227–230
and `\allowdisplaybreaks` commands, 243
`\gcd` (gcd math op.), *172*, *510*
`\ge` ($\ge$ binary rel.), *503*
generalized
commands, *see* user-defined commands
fractions, 204–205
`\genfrac` (math com.), **204–205**
`geometry` (pack.), 270
`\geq` ($\geq$ binary rel.), *503*
`\geqq` ($\geqq$ binary rel.), *504*
`\geqslant` ($\geqslant$ binary rel.), *504*
`german` (opt. of babel pack.), 548
`german.tex` (sample file), 548
`\gg` ($\gg$ binary rel.), *503*
`gg.tex` (sample file), 44–48
`gg2.tex` (sample file), 45–46
`ggamsart.tpl` (template file), 297
`\ggg` ($\ggg$ binary rel.), *504*
`\gimel` ($\gimel$ Hebrew char.), *501*
`glo` (glossary files), 464, 531
global commands, *see under* scope
glossaries, 464
as a custom `list` environment, 414
auxiliary file (`glo`), 464, 531
defining, 464, 531
`\glossary` (glossary com.), 464, 531
glue, **378**, 407, **530**, 530
horizontal, 530
parameters of, 530
vertical, *see also under* vertical spacing, 530
glyphs, *see also* characters
measuring, 530
`\gnapprox` ($\gnapprox$ neg. binary rel.), *505*
`\gneq` ($\gneq$ neg. binary rel.), *505*
`\gneqq` ($\gneqq$ neg. binary rel.), *505*
`\gnsim` ($\gnsim$ neg. binary rel.), *505*
go to line productivity tool, *see* jump to a line
Google, 464, 538
Goossens, Michel, xxxiii, 558, 559
graphics
commands for, 54, 259, **259**, 260, 327, 341, 479, 496
file extensions in, 496
in presentations, 342
formats
EPS, 39, **259**, 483, 496, 552
PDF, 39, 259, 326
including in documents, 259–260
scaling, 259
`graphics` (LaTeX distr. directory), 311, 539
`graphics` (pack.), 312
`\graphicspath` (`graphics` com.), 477
`graphicx` (pack.), 37, 39, 250, 259–260, 300, 523, 552
grave (` grave text accent), 62, *79*, *516*
`\grave` ($\grave{x}$ math accent), *177*, *512*
greater than (>)
as binary relation, *503*
text symbol, *81*, *518*
Greek letters, 181, 389–390, *502*
Greenwade, George D., 99
grouping
chapters into parts, 466
equations, 203–204
formulas, 210, **211–212**
symbols with math delimiters, 169
groups
of equations, 203–204
cross-referencing, 218–219
labels for, 204
numbering, 218–219
of tokens, 530
`\gtrapprox` ($\gtrapprox$ binary rel.), *504*
`\gtrdot` ($\gtrdot$ binary rel.), *504*
`\gtreqless` ($\gtreqless$ binary rel.), *504*
`\gtreqqless` ($\gtreqqless$ binary rel.), *504*
`\gtrless` ($\gtrless$ binary rel.), *504*

\gtrsim (≳ binary rel.), *504*
guillemets, *519*
\guillemotleft (Eur. quot. mark), *519*
\guillemotright (Eur. quot. mark), *519*
\guilsingleft (Eur. quot. mark), *519*
\guilsingright (Eur. quot. mark), *519*
Gurari, Eitan, 558
GUTenberg (French TEX user group), 541
\gvertneqq (≩ neg. binary rel.), *505*

H

\H double acute text accent (˝), *79*, *516*
Hahn, Harley, 554, 558
handout (beamer doc. class opt.), 358
\hangafter
  TEX command, 377
  length command, 100
\hangindent (length com.), **99**
hanging indentation, **99–100**, 145
Hargreaves, Kathryn A., 553, 557
Harrison, Michael A., 449, 463, 557
Hart, Horace, 553, 559
\hat ($\hat{x}$ math accent), 25, *177*, *512*
\hbar ($\hbar$ math sym.), *508*
\hdotsfor (space fill com.), **186**, 233, 235
  optional argument of, 233
headers, page, *see* running heads
headings (page style), 268
\headtoname (redef. name), *376*
\heartsuit (♡ math sym.), *508*
Hebrew letters, *501*
\height (length com.), 108, **108**, 111
height, of text boxes, 108, 110, 111, 113, 405, *405*
Helvetica (sans serif font), 89, 544
\hfill (space fill com.), 106, 126, 131, 414
\Hfootnotename (hyperref redef. name), *323*
\hfuzz (\hbox warning adjustment), 96
hhline (pack.), 140, 313
hierarchy of structural commands, 252, 466
history of $\mathcal{AMS}$-LATEX, $\mathcal{AMS}$-TEX, TEX, and LATEX, 521–525
\hline (table com.), 135, 137
Høgholm, Morten, 206
\hom ($\hom$ math op.), *172*, *510*
\hookleftarrow (↩ math arrow), *507*
\hookrightarrow (↪ math arrow), *507*
horizontal lines (rules), in tabular environments, 135, 137
horizontal spacing, 313
  adjusting, 188
  commands
    \␣ (interword space), 11, **66**, 70, 102, *190*, *520*
    \! (negthinspace), *182*, **190**, *190*, *513*, *520*
    \, (thinspace), 25, 67, 75, 188, 190, *190*, *513*, *520*
    \: (medspace), *190*, *513*, *520*
    \; (thickspace), *190*, *513*, *520*
    \@. (intersentence space), *520*
    \dotfill (fill com.), 106
    \frenchspacing, 67
    \hdotsfor (fill com.), **186**, 233, 235
    \hfill (fill com.), 106, 126, 131, 414
    \hrulefill (fill com.), 106, 113
    \hspace, **102**, 142
    \hspace*, 69, 103–104
    \medspace, *190*, *513*, *520*
    \mspace, **190**, *190*, *513*
    \negmedspace, *190*, *513*, *520*
    \negthickspace, *190*, *513*, *520*
    \negthinspace, *182*, **190**, *190*, *513*, *520*
    \nobreakspace, 76
    \nonfrenchspacing, 67
    \phantom, **102–103**, **191–192**, 223, 406
    \qquad, 27, 102, 105, 190, *190*, 224, *513*, *520*
    \quad, 24, 27, 102, 105, 154, 190, *190*, 225, *513*, *520*
    \thickspace, *190*, *513*, *520*
    \thinspace, 25, 67, 75, 188, 190, *190*, *513*, *520*
    to avoid using, 481
    \xspace, 368–369
  in math, **19**, **154–156**, **187–192**, 233, 236
  in text, 11, **64–67**, **102–104**, 114, 126, 414, *513*, *520*
  intersentence, 11, 64–67
  interword space (␣), 11, 64–67, 70, 76, 102, 383, 427
  preventing removal of, 103
howpublished (BIBTEX database field), 425
\href (hyperref com.), 323
\hrulefill (space fill com.), 106, 113
\hslash ($\hbar$ math sym.), *508*
\hspace (spacing com.), **102**, 142
\hspace* (spacing com.), 69, 103–104
HTTP (Hypertext Transfer Protocol), 538
\Huge (font size com.), **93**, *93*, *517*
\huge (font size com.), **93**, *93*, *517*
\hyperlink (beamer com.), 344
hyperlinks, 319
  in PDF files, **319–323**
    increasing size of, 322
    suppressing, 322
    to bibliographic citations, 321
    to Web sites, 322–323

in presentations, 343–347, 358
putting bookmarks in documents, 321
to bibliographic citations, *321*
with `hyperref` pack., *320*, *321*, 320–322
`hyperref` (pack.), 320–323
bookmarks file (`out`), 321
commands
`\autoref`, 320, *320*, 322, *323*
`\pageref`, 322
`\ref`, 322
`\urladdr`, 323
`\WriteBookmarks`, 322
documentation for, 320
options, **320**
`bookmarks=true`, 320, **321**
`colorlinks`, 320, 321, **321**
`dvipdf`, 320
`dvipdfm`, 320
`dvipdfmx`, 320
`dvips`, 320
`dvipsone`, 320
`dviwindo`, 320
`hypertex`, 320
`pagebackref`, 320, 321, *321*
`pdftex`, 320
`ps2pdf`, 320
`tex4ht`, 320
`textures`, 320
`vtex`, 320
`hypertex` (opt. of `hyperref` pack.), 320
Hypertext Transfer Protocol, *see* HTTP
`hyphen.tex`, 82
hyphenation, **13**, **82–85**, 530
determined by optional hyphen, 82
displaying, 84
LaTeX's algorithm, 79, 82
of German text, 13, 548
of hyphenated words, 13
of words with accents, 82
preventing, 83–84, 107
rules for English, 85
specifying, 82
tables, 528
`\hyphenation`, 82
hyphens, **14**, 62, **75**
key, 9, 63
optional, 13, 82, **82**, 96, 483
unbreakable, 83

I

`\i` (ı dotless i), **79**, *79*, *516*
`\idotsint` ($\int\cdots\int$ large math op.), **161**, *175*, *511*
`idx` (index aux. file), 459, *460*, 461, 464
`\iff` ($\Longleftrightarrow$ math arrow), 365, *507*
`\ignorespacesafterend` (spacing com.), 383
`\iiiint` ($\iiiint$ large math op.), **161**, *175*, *511*
`\iiint` ($\iiint$ large math op.), **161**, *175*, *511*
`\iint` ($\iint$ large math op.), **161**, *175*, *511*
`ilg` (*MakeIndex* log files), 461
illustrations, 258, **259–260**
commands for, 479, 496
double-column, 259
Encapsulated PostScript (EPS), 39, 259, 476, 483, 496
`graphicx` (pack.), 250, 259
placement of, 102, 260
portability of, 552
Portable Document Format (PDF), 39, 259, 476, 496, 552
preparation of, 483
sample files, 39, 54, 327
scaling, 54, 259
with `graphicx` (pack.), 37
with the `picture` environment, 259
`\Im` ($\Im$ math sym.), *508*
`\imath` ($\imath$ math sym.), *508*
implementations, LaTeX, *see* LaTeX implementations
`\in` ($\in$ binary rel.), *503*
`in` (inch abs. unit), 12, 15, 96, 105, 107, 111, 403
`inbibl.tpl` (sample file), 263
`INBOOK` (bibl. entry type), 424, **436**
inch (`in` abs. unit), 12, 15, 96, 105, 107, 111, 403
`\include` (inclusion com.), 392, 477, **478**
and auxiliary files, 531
and counters, 400
errors with, 478
files start on new pages, 478
`\includegraphics` (`graphics` com.), 54, **260**, 327, 479, 496
file extensions in, 259, 496
in presentations, 341, 342
`\includeonly` (preamble inclusion com.), 400, 477, **478**
including
files in other files, 386, 392
fonts
in PDF files, 318
in PostScript files, 317
graphics in documents, 259–260
`INCOLLECTION` (bibl. entry type), 424, **431**
incrementing counters, 399
`ind` (proc. index files), **459**, *460*, 461, 487
`\indent` (indentation com.), 99

indentation
  hanging, **99–100**, 145
  in `multline` and `multline*` environments, 213
  in source files, 166
    of environment bodies, 155
  of first lines of paragraphs, 99, 313, **404**
  of subformulas, 217
  of text, 99–100
    customizing, 103
    forcing, 99
    preventing, 99
`indentfirst` (pack.), 313
`\index` (indexing com.), 371, 450, **450**, **453–459**
  at signs (`@`) in, 455, 456
  defining cross-references in indexes with, 457
  double quote (`"`) in, 457
  encapsulators, 454, 455
  exclamation marks (`!`) in, 453, 454, 457
  modifiers, 454, 455
  page ranges in, 455
  placement of commands, **458**, 486
  spaces in argument of, 462
  syntax of, 458
  vertical line (`|`) in, 454, 457
indexes, 311, *452*, **449–464**
  appear in back matter, 450
  auxiliary files (`idx`), 459, **461**
  cross-references in, 457
  defining, *see* indexing
  entries
    sorting, 455–456
    stored in `idx` files, 459, **461**
  log files (`ilg`), 461
  main entries, 267, 449, **453**
  multiple, 463–464
  placement of, **450**, 461
  processed files (`ind`), **459–461**, 487
  processing, 459–461
  sample, *452*, 450–452
  simple, 267
  special characters in, 457
  subentries, 267, 449, **453**
  subsubentries, 267, 449, **454**
  syntax of, 458
  typesetting, 459–461
  using `showidx`, *453*
  vertical space in, 267, 449
indexing, *see also MakeIndex*, 449–464
  commands for, 267, 371, **449–459**, 461
  CTAN systems for, 539
  entries
    main, 267, 449, **453**
    subentries, 267, 449, **453**
    subsubentries, 267, 449, **454**
  environment for, 267, 407, 449, 459
  page ranges, 454–455
  placement of commands for, 458
  processed files (`ind`), 487
  processed index files (`ind`), **459–461**
  rules for, 462–463
  typesetting entries in margins, 311
  with AMS document classes, 450
  with user-defined commands, 371
`\indexname` (redef. name), *376*
`\indexspace` (indexing com.), 449
`\inf` (inf math op.), *172*, 299, *510*
information, top matter
  AMS specific, 279–281
    AMS subject classifications, 279
    keywords, 280, 297
  author, 275–279, 304
    addresses, 44, 277, 296
    current addresses, 277, 281
    e-mail addresses, 278, 281, 296
    Internet addresses, 278, 281, 296
    research support, 44, 279, 281, 296, 304
  for articles, 37–38, 273–285
    author names, 276, 296, 304
    dedications, 275
    title, 273, 297, 304
    translator, 274
`\infty` (∞ math sym.), 20, *508*
`initex` (TEX program), 528
initials
  periods in, 67
  typographical rules for, 67
`\injlim` (inj lim math op.), *172*
inline
  fractions, 158
  math formulas, *see* inline math environments
  tables, 133
inline math environments, 17, **152**
  `\(` (start math mode), 18, 74, 152
  `\)` (end math mode), 18, 74, 152
  act as special braces, 152, 153
  and `$`, 17, 18, 33, 74, 152, **152**
  display-style binomials in, 158
  font size of, 199
  `math`, 152
  matrices in, 235
  size of delimiters in, 170
`INPROCEEDINGS` (bibl. entry type), 424, 430–431
`\input` (inclusion com.), 528
`inputenc` (pack.), 547
`\institute` (`beamer` com.), 326

`institution` (BIBTEX database field), 425
instructions to LATEX, *see also* commands *and* environments, 7, 11, 35, 48, 63, 67, 248, 252, 534
`\int` ($\int$ large math op.), **25**, *175*, *511*
integrals, 25, 161, 299
integration of fonts into LATEX, 523, 543
interactive mode, 113, 376–378, 491, **534–535**
`\intercal` ($\intercal$ math op.), *506*
intercolumn spacing, 209, 220, *220*
  in aligned math environments, 224, 228
  in `tabular` environments, 136
interline spacing, 242
  adjusting, **95**, 98–99, 104
international TEX users groups, 537
Internet, 278, 322, 415, 538
  addresses, 279, 323
    in top matter (`\urladdr` com.), 278, 279, 296, 323
  and LATEX, 537–542
  browsers, **538**, 540
    FTP transfers, 538
    viewing PDF files in, 318
  documents in PostScript format, 317
  finding LATEX and TEX related material on, 537
  finding LATEX- and TEX-related material on, 538
  hyperlinks in PDF documents, 319, 323
  LATEX and TEX resources on, 538, 542
  putting LATEX documents on, 317–323
  types of sites for downloading files, 538
intersentence spaces (`\@.`), 11, 64–67, *520*
  and `\frenchspacing`, 67
  and `\nonfrenchspacing`, 67
`\intertext` (text in math com.), 226–227
interword space, 11, 64–67, 76, 383, 427
  and `\frenchspacing`, 67
  and `\nonfrenchspacing`, 67
  command (`\␣`), 11, **66**, 70, 102, *190*, *520*
`intlimits` (opt. of `amsmath` pack.), 299
`intrart.tex` (sample file), **35–43**, 53, 55, 326, 331
  typeset, 41–43
`intrarti.idx` (index entry file), 459, *460*, 461
`intrarti.ilg` (index log file), 461
`intrarti.ind` (index proc. file), 459–461
`intrarti.tex` (sample file), 450–452, *460*, 459–461
`intropres.tex` (sample file), 53, 55, *57–58*
invalid characters, 9, 63
inverse search, *see* synchronization
invisible boxes, *see* struts
invoking
  delimited commands, 378
  proclamations, 37, 46, 52, **125**, 128, 343, 384
  user-defined commands, 366
`\iota` (ι Greek char.), *502*
`ISBN` (bibl. com.), 425
`\it` (obs. LATEX 2.09 font com.), 94
italic correction, **91–93**, *520*
  and commas, 92
  and `\em`, 92
  and font commands, 90, 92
  and `\itshape`, 92
  and periods, 92
  and `\slshape`, 92
  suppressing, 92
  with two-letter font commands, 95
italics
  bold math, 197
  font shape, 14, 28, 68, 88, *90*, **91**, 94, **123**, 412, *516*
    in math mode, **196**, *196*, *512*
  math font, 196
`\item` (list item com.), 118–123
  and square brackets, 122
  in simple indexes, 267, 449
  optional arguments of, 120, **122**, 409, 410
`\itemindent` (length com.), 407, *408*
`itemize` (text list env.), 118, **119**
`\Itemname` (`hyperref` redef. name), *323*
`\itemsep` (length com.), **407**, 413
`\itshape` (font shape com. dec.), *90*, **91**, 94, 123, 412, *516*
  and italic correction, 92
`itshape` (font shape env.), 123

J

`\j` ($\jmath$ dotless j), **79**, *79*, *516*
Jackowski, Bogusław, 525
Java, with BIBTEX, 447
JavaScript, 318
Jeffrey, Alan, 523
Jensen, Frank, 403
`\jmath` ($\jmath$ math sym.), *508*
`\Join` ($\bowtie$ binary rel.), *503*
Jones, David M., 447, 524
`journal` (BIBTEX database field), 425
Jr., in bibliographic entries, 426
jump to a line productivity tool, **6**, 494, 498
justification of text
  left, 8
  right, 8, 14, 68

K

`\k` (ogonek Eur. accent), *519*
`\kappa` (κ Greek char.), *502*
`\ker` (ker math op.), *172*, *510*

Kern, Uwe, 325, 348, 349, 559
kerning, 529, 530
`key` (BibTeX database field), 425
keyboard, 8–9, 11, **62–64**, 547
  equivalents, 494, 499
keys, 17
  alphanumeric, 8–9
  arrow, 53
  Enter, *see* Return key
  Esc (escape), 63, 365
  letter, 8–9, **62**
  math symbol, 63
  math typing, 17
  modifier, 62, 63
  number, 62
  prohibited, 9, 63
  Return, 9, 11, 63
  space bar, 9, 11, 53, 63, 325, 334
  special, 9, 17, **63**, 76
  Tab, 9, 11, 63
keys, sorting (in `\index` commands), 455–456
  case sensitivity of, 462
`\keywords` (top matter com.), 297
  rules for using, 280
`keywords` (bibl. com.), 425
`\keywordsname` (redef. name), *376*
`\kill` (tabbing com.), 141, 142
Knuth, Donald E., xxix, 363, 521–523, 525, 528, 539, 553, 559
`koi8-u` (font encoding), 548

L

L, slashed (Ł, ł), *81*, *515*
`\label` (cross-ref. com.), 28, 29, 31, 50, 156, 215, 231, 252, **255**, 328
  and simple indexes, 267
  arguments of, 29, 257
  assigning counters to, 402
  in `table` environments, 259
  placement of commands, 486
  rules for, 257
  showing in margin, 257, 313
  with `\\`, 215
labels
  for `\bibitem` commands, 263
  for bibliographic items, 48, 121
  for equations, 255
  for groups of equations, 204
  in list environments, 121, **121**
  of items in a `list` environment, *408*, **409**, 410
  setting with `\label`, 255
`\labelsep` (length com.), 407, *408*
`\labelwidth` (length com.), 407, *408*
`\Lambda` (Λ Greek char.), *502*
`\lambda` (λ Greek char.), *502*
Lamport, Leslie, xxix, 403, 522, 523, 529, 552, 559
`\land` (∧ math op.), *506*
`landscape` (doc. class opt.), 307
`\langle` (⟨ math delimiter), *167*, **168**, *509*
`language` (BibTeX database field), 425
`\LARGE` (font size com.), **93**, *93*, *517*
`\Large` (font size com.), **93**, *93*, 94, *517*
large
  math delimiters
    in `array` subsidiary math environment, 313
  operators, 25, **26**, 161, *175*, **174–176**, *511*
    limits of, **174**, 299
    sizing of math delimiters with, 169
  symbols, 117, 227–230
`\large` (font size com.), **93**, *93*, *517*
`\larger` (font size com.), **94**
LaTeX, **521**, 525
  and the Internet, 537–542
  counters, *399*
  customizing, 363–417
  distribution, 78, 86, **310–313**, 489, 525, 528, **529**, 532, 534, 539, 540
    components of, 303–308
    directories, 257, **310–311**, 312, 540, 547, 553
    on CTAN, 540
  document classes, *see under* document classes
  document structure, 247–270, 467
  documentation for, 311, 552
    packages, 312
  documents, 247–270
    printing and viewing, 530
    putting on the Internet, 317–323
  files created by, 531–534
  files, portability of, 9
  font substitution, 94, 318, 484
  formats, 529
  history of, 521–525
  implementations, xxvi, 3, 5, 311, 318, 326, 525, 537
    discussion groups, 542
    for Mac, 3, 326, 489, 495–499
    PC, 3
    for PC, 326, 489–494
    productivity tools, **5**, 494, 498
    technical support for, 541–542
    UNIX, 3, 442, 461, 489
  inner workings of, 528–534
  layers of, 528–529
  localization of, 79, 547–548
  numbers stored by, 80

omissions in discussion of, 551–552
overview of, 521–536
packages, *see under* packages
release dates of, 86, 251, 532
resources on the Internet, 542
source files, *see under* source files
spacing in text, 11
structure of, 525, *526*
updates to, 532
using, **525**, *527*
versions of, 532–534
specifying, in documents, 86, 250, 386, 532
writing books with, 465–487
`latex` (LaTeX distr. directory), 499
`\LaTeX` (LaTeX logo com.), 8, 80
LaTeX 2.09, 386, 522–524
font names, 313
two-letter font commands, 94, **94**
LaTeX 2_ε, *see* LaTeX
`latex.ltx`, **311**
LaTeX3, **523**, 524, 541
`\LaTeXe` (LaTeX 2_ε logo com.), 80, 524
`latexsym` (pack.), 37, 180, 249, 294, 300, 311
layers, of LaTeX and TeX, 528–529
layout
of a list, *408*
of Computer Modern typewriter font, 78, *78*
of pages, **268–270**, 313, 525
`\layout` (page-layout diagram com.), 268
`layout` (pack.), 268, 313
`\lbrace` ({ math delimiter), *167*, *509*
`\lbrack` ([math delimiter), *167*, *509*
`\lceil` (⌈ math delimiter), *167*, *509*
`\ldots` (. . .)
in math, 160, 186
in text, **24**
`\le` (≤ binary rel.), *503*
`\leadsto` (⇝ math arrow), *507*
`\left` (math delim.), **167–168**, 170, 184, 235
blank, 168, 182
must be balanced, 168, 217
left double quote (“)
text symbol, 75, *81*, *518*
typing, 11
left justification of text, 8
left single quote (‘)
key, 9, 11, 62, **75**
text symbol, **75**, *519*
`\left(` (⟨ math delimiter), 24, 26, 166, 168, 184, 217, 235
`\left.` (blank math delim.), 168, 182
`\left<` (⟨ math delimiter), **168**
`\left[` ([math delimiter), 24, 166, 182
`\Leftarrow` (⇐ math arrow), *507*
`\leftarrow` (← math arrow), 364, 374, *507*
`\leftarrowtail` (↢ math arrow), *507*
`\leftharpoondown` (↽ math arrow), *507*
`\leftharpoonup` (↼ math arrow), *507*
`\leftleftarrows` (⇇ math arrow), *507*
`\leftmargin` (length com.), **407**, *408*, 411
`\Leftrightarrow` (⇔ math arrow), *507*
`\leftrightarrow` (↔ math arrow), *507*
`\leftrightarrows` (⇆ math arrow), *507*
`\leftrightharpoons` (⇋ math arrow), *507*
`\leftrightsquigarrow` (↭ math arrow), *507*
`\leftroot` (root-adjustment com.), 162
`\leftthreetimes` (⋋ math op.), *506*
`\left|` (| math delimiter), 24, 26, 168, 180, 189, 191
legacy
document classes, 54, 118, 249, 254, 263, 273, 302, *305*, **303–313**, 529
documents, 319
environments, 123, 143–145, 407
`quotation`, 144
`quote`, 143
`verse`, 144
`legacy-article.tex` (sample file), 304, 305
`legalpaper` (doc. class opt.), 85, 298, 306
Lehman, Philipp, 447
lemmas, *see* proclamations
length commands, 108, 270, 398, **403–406**
and boxes, 405
arithmetic with, 312, 405
`\baselineskip`, 95, 101
`\baselinestretch`, 99
defining new, 404
`\depth`, 108, **108**, 111
`\fboxrule`, 110
`\fboxsep`, 110
`\hangafter`, 100
`\hangindent`, **99**
`\height`, 108, **108**, 111
in `list` environments, 407
`\itemindent`, 407, *408*
`\itemsep`, 407, 413
`\labelsep`, 407, *408*
`\labelwidth`, 407, *408*
`\leftmargin`, **407**, *408*, 411
`\listparindent`, 407, *408*, **414**
`\marginparpush`, 404
`\marginparwidth`, 113
`\medskipamount`, 377, **406**
`\multlinegap`, 213
`\oddsidemargin`, 270
`\overfullrule`, 96
`\parindent`, **404**, 414

length commands (*continued*)
\parsep, **407**, *408*, 413, 414
\parskip, **404**, 407, *408*, 414, 481
\partopsep, 407
\rightmargin, **407**, *408*, 411
setting, 99, 100, 113, **404–406**
\textwidth, 270, 398, **404**
\topsep, **407**, 408
\totalheight, 108, **108**, 110, 111
\width, 108, **108**, 111
lengths, rubber, *see* rubber lengths
\leq ($\leq$ binary rel.), *503*
leqno (doc. class opt.), **298**, 307
\leqq ($\leqq$ binary rel.), *504*
\leqslant ($\leqslant$ binary rel.), *504*
less than ($<$)
as binary relation, *503*
text symbol, *81*, *518*
\lessapprox ($\lessapprox$ binary rel.), *504*
\lessdot ($\lessdot$ binary rel.), *504*
\lesseqgtr ($\lesseqgtr$ binary rel.), *504*
\lesseqqgtr ($\lesseqqgtr$ binary rel.), *504*
\lessgtr ($\lessgtr$ binary rel.), *504*
\lesssim ($\lesssim$ binary rel.), *504*
letter (doc. class), 308–310, 529
letter (letter env.), 308–310
argument of, 309
breaking lines in, 309
errors with, 309
letter keys, 8–9, **62**
letter.tex (sample file), 308–310
letterpaper (doc. class opt.), 298, 306
letters
counter style, *401*
Greek, 181, 389–390, *502*
Hebrew, *501*
Levy, Silvio, 553, 560
\lfloor ($\lfloor$ math delimiter), *167*, *509*
\lg (lg math op.), *172*, *510*
\lhd ($\lhd$ math op.), *506*
ligatures, **79**
suppressing, **79**, 181, 365
\lim ($\lim$ math op.), *172*, *510*
\liminf ($\liminf$ math op.), *172*, *510*
limits
as subscripts, **25**, **161**, 171–174, 182, 299
as superscripts, **25**, **161**, 174, 182, 299
large operators with, 25, 27, 161, 174, **174**, *175*, 299, *511*
multiline, 176
operators with, 171, *172*, 299, *510*
placement of, 299
\limits (limit-control com.), **161**, 174
\limsup ($\limsup$ math op.), *172*, *510*
line boxes, *see under* boxes
line ending characters, 63–65, 68, 84, 102
commenting out, 84, 85, 458
on Mac, PCs, and UNIX systems, 9
translation of, 63
line numbers, in error messages, 6, **9**, 153, 154
\linebreak (line breaking com.), 484, 486
\linebreak (line-breaking com.), 97, **97**
optional arguments of, 98
lines
adding to
lists of figures and tables, 476
tables of contents, 473–474
blank
in displayed math environments, 51, 153, 157, 215
in inline math environments, 153
in text environments, 118
in top matter commands, 273
in verbatim environments, 146
terminating paragraphs with, 11, **64**, 99, 118, 144
breaking, **15**
preventing, 99
with \\, 25, 30, 31, 33, 44, 46, 98, 124, 135, 141, 142, 145, 176, 211, 213, 215, 216, 227, 231, 242, 273–278, 297, 304, 309, 358
distance between, 104
adjusting, 114
filling with space or dots, **106**, 113, 126, 186, 233, 235, 414
separating
with \\, 25, 30, 31, 33, 44, 46, 98, 124, 135, 141, 142, 145, 176, 211, 213, 215, 216, 227, 231, 242, 273–278, 297, 304, 309, 358
with \linebreak, 97, **97**, 484, 486
stretchable, 179
too wide warnings, 12–13
wrapping, 84
lines (rules)
horizontal
filling lines with, 106, 113
in tabular environments, 135, 137
intersecting in tables, 140, **313**
vertical
in CD environments, 241
in tabular environments, 135
links, hyper, *see* hyperlinks
Linux, 3, *see also* UNIX, 554
list (list text env.), 118, 406, *408*, **409–414**
arguments of, 410
length commands in, 407
using counters with, 411

list text environments, *see also* specific environments, **118–123**
`description`, **120**
`enumerate`, **119**, 123
in proclamations, 126
`itemize`, **119**
`list`, 118
mixing, 121
nesting, 121
rules for, 120
`trivlist`, 414
`\listfigurename` (redef. name), 375, *376*
`\listfiles` (file list com.), 387, 532, **533**
listing files used by a document, 387, 533
`\listoffigures` (front matter com.), **475**, 532
`\listoftables` (front matter com.), **475**, 532
`\listparindent` (length com.), 407, *408*, **414**
lists
cross-referencing items in, 119, 123
custom
and counters, 410
defining, 406–415
environments for, *see* list text environments
in presentations, 339–341
of figures, 475–476
adding a line to, 476
auxiliary file (`lof`), **475**, 487, **532**
fragile commands in, 74
of tables, 134, **475–476**
adding a line to, 476
auxiliary file (`lot`), **475**, 487, **532**
fragile commands in, 74
`\listtablename` (redef. name), *376*
`\ll` ($\ll$ binary rel.), *503*
`\llcorner` ($\llcorner$ math delimiter), *167*, *509*
`\Lleftarrow` ($\Lleftarrow$ math arrow), *507*
`\lll` ($\lll$ binary rel.), *504*
`\ln` (ln math op.), *172*, *510*
`\lnapprox` ($\lnapprox$ neg. binary rel.), *505*
`\lneq` ($\lneq$ neg. binary rel.), *505*
`\lneqq` ($\lneqq$ neg. binary rel.), *505*
`\lnot` ($\lnot$ math sym.), *508*
`\lnsim` ($\lnsim$ neg. binary rel.), *505*
local commands, *see under* scope
localization, of LaTeX, 547–548
locating errors, 87
location of BibTeX database and style files, 439
`lof` (list of figures file), **475**, 476, 487, **532**
`\log` (log math op.), *172*, *510*
`log` (LaTeX log file), 5, *5*, 9, 12, 29, 84, 96, 378, 386, 441, 475, *493*, *499*, **526**, **531**, 533
error and warning messages recorded in, 12, 96
log files
for BibTeX, *see* `blg`
for indexes, *see* `ilg`
for LaTeX, *see* `log`
log-like functions, *see* operators
logical
design, 52–53
of books, 479–481
units, 11, 35–41, 46, 48, 49, 51, 52, 66, 68, 164, 248, **252–255**, 261, 267, 285, 304, 308–310, 406, 437, 442, 449, 459, **466–467**, 522, 536
hierarchy of, 252
numbering of, **403**, **466**
numbering of proclamations within, 128
logos, 80
long commands, 73
`\Longleftarrow` ($\Longleftarrow$ math arrow), *507*
`\longleftarrow` ($\longleftarrow$ math arrow), *507*
`\Longleftrightarrow` ($\Longleftrightarrow$ math arrow), *507*
`\longleftrightarrow` ($\longleftrightarrow$ math arrow), *507*
`\longmapsto` ($\longmapsto$ math arrow), *507*
`\Longrightarrow` ($\Longrightarrow$ math arrow), *507*
`\longrightarrow` ($\longrightarrow$ math arrow), *507*
`longtable` (pack.), 313
`\looparrowleft` ($\looparrowleft$ math arrow), *507*
`\looparrowright` ($\looparrowright$ math arrow), *507*
`\lor` ($\lor$ math op.), *506*
`lot` (list of tables files), **475**, 487, **532**
low-level font commands, 95
for NFSS, 552
lowercase counter styles
letters (`\alph`), *401*
roman numerals (`\roman`), 123, *401*
lowline (_ text symbol), *77*, *81*, *518*
`\lozenge` ($\lozenge$ math sym.), *508*
`\lrcorner` ($\lrcorner$ math delimiter), *167*, *509*
`\Lsh` ($\Lsh$ math arrow), *507*
`\ltimes` ($\ltimes$ math op.), *506*
LuaTeX, 554
Lucida Bright, 543, 546
`lucidabr` (pack.), 546
`lucidabr.dtx` (PSNFSS distr. file), 546
`lucidabr.fdd` (PSNFSS distr. file), 546
`lucidabr.ins` (PSNFSS distr. file), 546
`lucidabr.sty` (PSNFSS distr. file), 546
`lucidabr.yy` (PSNFSS distr. file), 546
`\lVert` ($\lVert$ math delimiter), 168
`\lvert` ($\lvert$ math delimiter), 168
`\lvertneqq` ($\lvertneqq$ neg. binary rel.), *505*
`LY1` (pack. opt.), 545, 546

M

Mac, *see* Macintosh
line ending characters, 9

Macintosh, xxvi, 3, 4, 9, 319, 479, 489, 522
  editing cycle with, 498
  FTP clients, 538
  LaTeX implementations, 3, 326, 489, 495–499
  OS X, 554
  spelling checkers, 495
  TeXShop LaTeX front end, xxvi, 9, 11, 53, 326, 442, 461, 496, 498
macron (¯ text accent), *79*, *516*
macros, *see* commands *and* user-defined commands
main entries, in indexes, 267, 449, **450**, **453**, 456, 457
main matter, 249, **251–261**, 467
\mainmatter (struct. com.), 467
\makebox (box com.), **107**, 108, 109, 111, 113
makeglos (pack.), 464
\makeglossary (preamble glossary com.), 464, 531
makeidx (pack.), 311, **450**, 478
MakeIndex, 77, 268, **449–464**, 532
  and font commands, 90
\maketitle (title-page com.), 37, 44, 46, 54, *248*, 249, 469
  and abstracts, 251, 285, 306
  and page styles, 270
MANUAL (bibl. entry type), 424, **436**
manuals, in BibTeX database files, 436
manuscripts
  in BibTeX database files, 435–436
  preparing for publication, 465
\mapsto (↦ math arrow), *507*
\mapstochar (↦ math arrow), *507*
marginal comments, **112–113**, 484
  in double-sided documents, 112
  in equations, 112
  in multiline math environments, 112
  space between, 404
  width of paragraph box for, 113
\marginpar (marginal comment com.), 112
  in double-sided documents, 112
\marginparpush (length com.), 404
\marginparwidth (length com.), 113
margins, 404, 407
  of nested lists, 407
  showing symbolic references in, **257**, 313
\markboth (left and right page header com.), **268**
  arguments of, 268
\markleft (left page header com.), 270, 281
\markright (right page header com.), 268
master document, 477–479
MASTERSTHESIS (bibl. entry type), 425, **433–434**
math, 7
  accents, **25**, **176–178**, 183, 185, 301, 377, 483
  alphabets, 180–182, 185, *196*, **195–197**, 301, 390, 512
  arrows, 179, 187, 240, *507*
    as delimiters, 166, *167*, **168**
    stretchable, **179**, 240–242
    vertical, 241
  binary operations, *see* binary operations
  binary relations, *see* binary relations
  characters, 17, 63
  commands, *see* math commands
  environments, 152–154
    aligned, *see under* aligned
    and \verb commands, 148
    blank lines in, 153, 157
    displayed, *see* displayed math environments
    inline, *see* inline math environments
    multiline, **215–219**, 333
    page breaks in, 242
    spaces in, 153
  fonts, 195–197
    blackboard bold, 181, **197**, 390, *512*
    bold, 184, **196**, *196*, **197**, 390, *512*
    bold italic, 196
    calligraphic, 185, **197**, 301, 390, *512*
    Euler Fraktur, 180, **197**, 301, 302, 390, *512*
    Euler Script, **301**, 390, 512, *512*
    italic, **196**, *196*, *512*
    roman, **196**, *196*, *512*
    sans serif, **196**, *196*, *512*
    size of, 199
    typewriter, **196**, *196*, *512*
  mode, *see* math mode
  multiline, 207–243
    Visual Guide to, **207**, *208*
  operators, 22, 24, 26, 157, *172*, **170–176**, 371, *506*, *510*
    declaring, 173
    large, 25, **26**, 161, 169, *175*, **174–176**, 299, *511*
    with limits, 25, 27, 161, 171, *172*, 174, *175*, 299, *510, 511*
  subscripts and superscripts, 199
  symbol alphabets, 197
    blackboard bold, 197
    calligraphic, 197
    Euler Fraktur, 197
    Greek, 197
  symbols, *see* math symbols
  text in, 19, **27**, 83, 99, 107, 154, **162–163**, 181, 196, 226–227, 241, 301

specifying fonts for, 163
typing, 17–33, 151–206
`math` (inline math env.), 152
math arrows, 179, 187, 240
as delimiters, 166, *167*, **168**, *509*
stretchable, **179**, 240–242
vertical, 241
math commands, 23, 27, 160, 161, 176, 191, 194, 200, 204
for alignment of formulas, 214
math delimiters, **24**, 26, *167*, **166–170**, 180–184, 186, 188, 189, 191, 217, 235, *509*
and large operators, 169
arrows, 166
balancing, 168, 182, 217
blank, 168, 182
fixed-size, 168
for grouping, 169
in inline math environments, 170
in `smallmatrix` subsidiary math environments, 235
large, in `array` subsidiary math environment, 313
left bracket ([ ), 24, 166, 182
right bracket ( ]), 24, 166, 182
specifying size of, **168**, 184
stretchable, 167–168
with `matrix` variants, 234–235
math font commands, *see also* font command declarations *and* font commands
for bold
`\boldsymbol`, 184, 197, **198**, 301, *512*
`\mathbb`, 181, **197**, *512*
`\mathbf`, 184, **196**, *196*, **197**, *512*
`\pmb`, **198–199**, 301
for italics
`\mathit`, **196**, *196*, *512*
for series
`\mathnormal`, **196**, *196*, *512*
for shape
`\mathcal`, 185, **197**, *512*
`\mathfrak`, 180, **197**, 301, 302, *512*
`\mathrm`, *196*, *512*
`\mathscr`, **301**, 512, *512*
`\mathsf`, **196**, *196*, *512*
`\mathtt`, **196**, *196*, *512*
for size
`\displaystyle`, **199**, 204
`\scriptscriptstyle`, **199**, 204
`\scriptstyle`, **199**, 204
`\textstyle`, **199**, 204
for weight
`\boldsymbol`, 184, 197, **198**, 301, *512*
`\mathbf`, 184, **196**, *196*, **197**, *512*
`\pmb`, **198–199**, 301
math mode, 7, **62**, 76, 147, 154, 163, 170, 171, 173, 199, 369, 375, 392
math symbols, 19, 20, 63, 131, 177, 182, 240, 249, 294, 311, *501–513*
alphabets, **197**
and delimiters, 24, 166, 168
bold, **197–199**, 301, 312
building new, 183, **192–195**, 372
classification of, **188–189**, 195
declaring types of, 195
end of proof, 113, 374
in text, 365
large, 227–229
negated, 194–195
shorthand commands for, 364
side-setting, 194–195
sizes of, 199
spacing of, 187–192
stacking, 192–193
stretchable, 178–180
suppressing, 131
math units, *see* mu
`math.tex` (sample file), 17–19
`mathb.tex` (sample file), 19–22
`\mathbb` ($\mathbb{X}$), 181, **197**, *512*
`\mathbf` (math font weight com.), 184, **196**, *196*, **197**, *512*
`\mathbin` (binary-op. com.), 195
`\mathcal` ($\mathcal{X}$), 185, **197**, *512*
and Euler Script, 301
Mathematical Reviews, 159
`\mathfrak` ($\mathfrak{X}$), 180, **197**, 301, 302, *512*
`\mathit` (math font shape com.), **196**, *196*, *512*
`\mathnormal` (math font shape com.), **196**, *196*, *512*
`\mathrel` (binary-rel. def. com.), 195
`\mathring` ($\mathring{x}$ math accent), *177*, *512*
`\mathrm` (math font shape com.), *196*, *512*
`mathscr` (opt. of `eucal` pack.), **301**, 386, 390, 512
`\mathscr` ($\mathscr{X}$ math font shape com.), **301**, 512, *512*
`\mathsf` (math font shape com.), **196**, *196*, *512*
`\mathstrut` (spacing com.), 114, 200
MathTıme, 545
installing, 545
`mathtime` (pack.), 545
`mathtime.dtx` (PSNFSS distr. file), 545
`mathtime.ins` (PSNFSS distr. file), 545
`mathtime.sty` (PSNFSS distr. file), 545
`mathtools` (pack.), 206
`\mathtt` (math font shape com.), **196**, *196*, *512*
`\mathversion`, 198
matrices, 25–26, 232–238
in inline math environments, 235

`matrix` (subsid. math env.), 25–26, *208*, 210, 231, **232–238**
  variants, 234–235
`\max` (max math op.), *172*, *510*
`MaxMatrixCols` (counter), 233
`\mbox` (box com.), xxvi, 107
McLean, Ruari, 553, 559
McPherson, Kent, 268
`\mdseries` (font weight com. dec.), *90*, **93**, *516*
`\measuredangle` (∡ math sym.), *508*
measurements, of text boxes, **405**, *405*
  commands for, 406
medium (font weight), 89, *90*, 93, *516*
`\medskip` (spacing com.), **104**
`\medskipamount` (length com.), 377, **406**
`\medspace` (spacing com.), *190*, *513*, *520*
messages
  error, *see* error messages
  warning, *see* warning messages
Metafont, 539
metrics, font, *see* font metrics
`\mho` (℧ math sym.), *508*
Microsoft
  typography web page, 546
  Vista, 555
  Windows, *see also* PCs, 446, 554
`\mid` (| binary rel.), **170**, 181, **189, 190**, *503*
midpoint (· text sym.), *81*, *518*
`MiKTeX` (Windows LaTeX front end), xxvi, 326, 490–491, 494
  discussion groups, 542
millimeter (`mm` abs. unit), 403
`\min` (min math op.), *172*, 299, *510*
`minipage` (text box env.), 107, 109, 112, 383, 384
  displaying footnotes in, 112
minus (−), 9, 22, 63, 76, 157, 188, 191, 192, 196, 216–218
  as binary operation, *506*
mirrors, of CTAN, 540
`MISC` (bibl. entry type), 425, **436**
Mittelbach, Frank, xxxiii, 101, 523, 524, 558, 559
mixing list text environments, 121
`mm` (millimeter abs. unit), 403
`\mod` (mod math op.), **173**, *174*
`\models` (⊨ binary rel.), *503*
modes
  interactive, 113, 376–378, 491, **534–535**
    quiet, 534
  typographic
    math, *see also* inline *and* displayed math environments, 7, **62**, 76, 147, 154, 163, 170, 171, 173, 199, 369, 375, 392
    text, 7, **62**, 63, 154, 181, 369, 375, 392
modifier keys, 62, 63
modifiers, in `\index` commands, 454
  combining, 455
modifying environments, 380–383
monospaced fonts, 88
`\month` (time com.), 80
`month` (BibTeX database field), 425, 436
Moore, Ross, xxvii, 242, 558
movable arguments of commands, 74, 475
`\mp` (∓ math op.), *506*
`mpfootnote` (counter), *399*
`mrabbrev.bib` (BibTeX database file), 436
`mrnumber` (bibl. com.), 425
`\mspace` (spacing com.), **190**, *190*, *513*
`mtbold` (opt. of `mathtime` pack.), 545
`mtfonts.fdd` (PSNFSS distr. file), 545
`\mu` (μ Greek char.), *502*
`mu` (math unit, rel.), 190, *190*, *513*
`multicol` (pack.), 101, 307, 313
`multicols` (disp. text env.), 101, 523
`\multicolumn` (table com.), *137*, *138*, 137–139
multicolumn text
  in documents, **101**, 313, 523
  in tables, 137–139
multiline
  boxes, 107
  formulas, **30–32**, **207–243**
    Visual Guide to, **207**, *208*
    aligning, 217–218
    splitting, 212–214
  limits, 176
  math environments, 333
    adjusting columns in, 209, 210, **231–239**
    aligning, 209, 210
    marginal comments in, 112
    page breaks in, 242–243
  subscripts and superscripts, 176
  table entries, 137, 138
`\multimap` (⊸ math arrow), *507*
multipage tables, 313
multiple
  arguments
    in user-defined commands, 370, 371
  authors
    in bibliographies, 426
    in documents, 46, 281, 304
  bibliographies in a document, 267
  captions, 259
  citations, 264
  documents, cross-referencing among, 313
  files, documents composed of, 476–479
  indexes, 463–464
  spaces, 19, 64, 71
  tables of contents, 474
multiplication, 23, 158, 161

`multline` (disp. math env.), *208*, 210, **212–214**
indentation of lines in, 213
rules for, 213
`multline*` (disp. math env.), 213–214
indentation of lines in, 213
`\multlinegap` (length com.), 213
`myams.tpl`, 294–297
`myheadings` (page style), 268

N
n-th root, 27, **162**
`\nabla` (∇ math sym.), *508*
`namelimits` (opt. of `amsmath` pack.), **299**
names
base (of files), 531
for abstracts, 251
for proclamations, 125, 128
of authors
in articles, 276, 296, 304
in bibliographies, 426
in running heads, 276
of commands, 68, 69, 386
of counters, 128
of files, 44
with `\graphicspath` command, 479
of fonts
LaTeX 2.09, 313
PSNFSS (Berry scheme), 544
redefinable, 267, 322, *323*, 363, **375**, 548
tagging equations with, 29, **201–204**, 211, 213, 215, 218, 230, 231
naming rule, *see* source files, naming of
`\natural` ($\natural$ math sym.), *508*
`\ncong` ($\ncong$ neg. binary rel.), *505*
`\ne` ($\neq$ neg. binary rel.), 194, *505*
`\nearrow` ($\nearrow$ math arrow), *507*
`\NeedsTeXFormat` (preamble com.), 86, **250**, 386, 532
`\neg` ($\neg$ math sym.), *508*
negated math symbols, **194–195**, *505*
`\negmedspace` (spacing com.), *190*, *513*, *520*
`\negthickspace` (spacing com.), *190*, *513*, *520*
`\negthinspace` (spacing com.), *182*, **190**, *190*, *513*, *520*
`\neq` ($\neq$ neg. binary rel.), *505*
nesting
of `comment` environments, 86
of list text environments, 121
New Font Selection Scheme, *see* NFSS *and* PSNFSS
`\newcommand` (user-defined com.), 74, **364–380**
defining arguments with, 370
name already in use, 376
optional arguments, 374
`\newcommand*` (user-defined com.), 373
`\newcounter` (user-defined counter com.), 400, 404
optional argument of, **400**
`\newenvironment` (user-defined env.), 380–383
`\newenvironment*` (user-defined env.), 385
`\newlabel` (aux. file com.), 531
`newlattice` (pack.), 250, 386, 387
`newlattice.sty` (sample file), 311, 379, 383, **386–392**
`\newlength` (length-command def. com.), 404
`\newline` (line breaking com.), *see also* `\\`, 15
`\newline` (line-breaking com.), **97, 98**
`\newpage` (page breaking com.), 15, **100, 101**, 261
`\newtheorem` (procl. com.), 37, **125**, 127, 129, 131, 294, 326, 402
optional arguments of, 127, 128
syntax of, 128
`\newtheorem*` (procl. com.), **129**, 382
`\newtheoremstyle` (procl. com.), 131
`\nexists` ($\nexists$ math sym.), *508*
NFSS (New Font Selection Scheme), **523**, 524
documentation for, 553
low-level font commands, 552
`nfssfont` (pack.), 311
`nfssfont.tex` (LaTeX distr. file), 78, 311
`\NG` (Eng Eur. char.), *519*
`\ng` (eng Eur. char.), *519*
`\ngeq` ($\ngeq$ neg. binary rel.), *505*
`\ngeqq` ($\ngeqq$ neg. binary rel.), *505*
`\ngeqslant` ($\ngeqslant$ neg. binary rel.), *505*
`\ngtr` ($\ngtr$ neg. binary rel.), *505*
`\ni` ($\ni$ binary rel.), *503*
`\nLeftarrow` ($\nLeftarrow$ math arrow), *507*
`\nleftarrow` ($\nleftarrow$ math arrow), *507*
`\nLeftrightarrow` ($\nLeftrightarrow$ math arrow), *507*
`\nleftrightarrow` ($\nleftrightarrow$ math arrow), *507*
`\nleq` ($\nleq$ neg. binary rel.), *505*
`\nleqq` ($\nleqq$ neg. binary rel.), *505*
`\nleqslant` ($\nleqslant$ neg. binary rel.), *505*
`\nless` ($\nless$ neg. binary rel.), *505*
`\nmid` ($\nmid$ neg. binary rel.), 194, *505*
`noamsfonts` (doc. class opt.), 300
`\nobreakdash` (hyph. prev. com.), 83
`\nobreakspace` (spacing com.), 76
`\nocite` (bibl. com.), **439**, 441
`\nocite*` (bibl. com.), 439
`\nofiles` (preamble com.), 486
and auxiliary files, 486, 531
`\noindent` (indentation-suppression com.), **99**, 484
`nointlimits` (opt. of `amsmath` pack.), 299

\nolimits (limit-control com.), **161**, **172**, 174, 182
\nolinebreak (linebreak-suppression com.), 99
nomath (doc. class opt.), 300
nonamelimits (opt. of amsmath pack.), 299
nonbreakable spaces (~ tie), **11**, 28, 63, 66, 75, **76**, 99, *520*
  absorb spaces, 76
  in BibTeX databases, 427
  with cross-references, 257
\nonfrenchspacing (spacing com.), 67
\nopagebreak (page break suppression com.), 100
normal
  document font family, 89
  font shape
    command declarations for, **90**, *90*, 123, *516*, 545
    commands for, **90**, *90*, *516*, 545
    math commands for, **163**, **196**, *196*, *512*
\normalfont (font shape com. dec.), **90**, *90*, 123, 163, *516*, 545
\normalsize (font size com.), **93**, *93*, *517*
nosumlimits (opt. of amsmath pack.), **299**
\not (math com.), **194**
\notag, 30, 31, 211, 213, **215**, 218, 231
notation (text env.), 327
notations, *see* proclamations
notcite (opt. of showkeys pack.), 257
note (beamer doc. class opt.), 355
\note (beamer com.), 355
note (BibTeX database field), 425
note1.tex (sample file), 9–11
note1b.tex (sample file), 12–13
note2.tex (sample file), 13–15
notes, in presentations, 355, *356*
noteslug.tex (sample file), 13
\notin ($\notin$ neg. binary rel.), **194**, *505*
notitlepage (doc. class opt.), **299**, 307, 468
Nowacki, Janusz M., 525
\nparallel ($\nparallel$ neg. binary rel.), *505*
\nprec ($\not\prec$ neg. binary rel.), *505*
\npreceq ($\not\preceq$ neg. binary rel.), *505*
\nRightarrow ($\not\Rightarrow$ math arrow), *507*
\nrightarrow ($\not\rightarrow$ math arrow), *507*
\nshortmid ($\nshortmid$ neg. binary rel.), *505*
\nshortparallel ($\nshortparallel$ neg. binary rel.), *505*
\nsim ($\not\sim$ neg. binary rel.), *505*
\nsubseteq ($\not\subseteq$ neg. binary rel.), 181, *505*
\nsubseteqq ($\not\subseteqq$ neg. binary rel.), *505*
\nsucc ($\not\succ$ neg. binary rel.), *505*
\nsucceq ($\not\succeq$ neg. binary rel.), *505*
\nsupseteq ($\not\supseteq$ neg. binary rel.), *505*
\nsupseteqq ($\not\supseteqq$ neg. binary rel.), *505*
NTG (Dutch TeX user group, 541
\ntriangleleft ($\not\triangleleft$ neg. binary rel.), 505
\ntrianglelefteq ($\not\trianglelefteq$ neg. binary rel.), 505
\ntriangleright ($\not\triangleright$ neg. binary rel.), 505
\ntrianglerighteq ($\not\trianglerighteq$ neg. binary rel.), 505
\nu (ν Greek char.), *502*
number (BibTeX database field), 424, 425
numbered lists, *see* enumerate
numbering
  automatic, 28, 30, 37, 46, 119, 125, 231, 252
  of appendices, 255, 467
  of equations, **27–29**, 55, **156–157**, 201, 211, 213, 215
    groups, 218–219
    in chapters of books, 467
    in multiline math environments, 215
    is relative, 201, 203
    of subsidiary math environments, 230, 231
    suppressing, 30, 31, 157, 201, 211, 213, 215, 218, 231
    variations, **203**, 218
    within sections, 156, 250
    within split subsid. math align. env., 230–231
  of figures, 258
  of pages, style of, 401
  of proclamations, 125, **127–128**
    consecutively, 127–128
    suppressing, 129, 130, 382
    within sections, 127
  of structural units, 400, 466, 536
    controlling, 403
    in books, 466
    sections, 252
    suppressing, 46, 253, 467
  of tables, 258
  renumbering, 28, 536
  with counters, 398–406
    resetting, 399, 402
\numberline (toc file com.), 475
numbers
  counter styles for, 123, *401*, **400–401**, 411
  for equations, placement of, 298, 307
  for proclamations, position of, 131
  in bibliographic fields, 424
  in lists, 119
  keys, 62
  line
    in error messages, 6, **9**, 153, 154
    in warning messages, 12
  page
    referencing, 258
    style of, 401

ranges, **14**, **75**, *81*
in BIBTEX databases, 424, 427
in index entries, 454
real, in length commands, 403
stored by LATEX, 80
stored in
counters, 399
registers, 377
version, 532
\numberwithin, **156**, 250, 466
numeric counter style (\arabic), 401, *401*, 411
\nVDash (⊯ neg. binary rel.), *505*
\nVdash (⊮ neg. binary rel.), *505*
\nvDash (⊭ neg. binary rel.), *505*
\nvdash (⊬ neg. binary rel.), *505*
\nwarrow (↖ math arrow), *507*

O

O'Sean, Arlene Ann, 217, 553, 560
O, slashed (Ø, ø), *81*, *515*
Oberdiek, Heiko, 319
obtaining
files from the Internet, 537–541
PostScript fonts, 546
sample files for this book, 4, 541
the AMS packages and AMSFonts, 540
octothorp (#), *77*, *81*, *518*
\oddsidemargin (length com.), 270
\odot (⊙ math op.), *506*
\OE ethel (Œ), *81*, *515*
\oe ethel (œ), *81*, *515*
ogonek (Eur. accent), *519*
\oint ($\oint$ large math op.), **161**, *175*, *511*
old-style digits, 62
\oldstylenums (old-style digits com.), 62
\Omega (Ω Greek char.), *502*
\omega (ω Greek char.), *502*
\ominus (⊖ math op.), *506*
onecolumn (doc. class opt.), 299, 307
\onecolumn (single-column com.), 101
oneside (doc. class opt.), **299**, 307, 468
\only (beamer com.), 333–335, **337–339**, 343
\onslide (beamer com.), 333, 335, **337–339**, 342, 343
openany (doc. class opt.), 468
openbib (doc. class opt.), **308**, *308*
openright (doc. class opt.), 468
operating systems, *see* Mac, PC, *or* UNIX
operations
arithmetical, 22–23, 157–159
binary, *see* binary operations
operators, math, 22, 24, 26, 157, *172*, *175*, **170–176**, 371, *506*, *510*
declaring, 173
large, 25, **26**, 161, 169, *175*, **174–176**, 299, *511*
sizing of math delimiters with, 169
with limits, 25, 27, 161, 171, *172*, 174, *175*, 299, *510, 511*
defining, 173, 195, 196
without limits
defining, 173, 195, 196, 198, 250, 301
\oplus (⊕ math op.), *506*
optional
arguments, 15, 71, 98, 100, 112, 113, 115, 125, 162, 179, 233, 242, 250
multiple, 70
of \\, **15**, **98**, 242
of commands, 56, 120, 122, 123, 127, 200, 201, 264, 266, 276–279, 351, 400, 402, 407, 409, 410, 414, 475
of environments, 125, 128, 132, 135, 229, 243, 260, 384, 486
of sectioning commands, 253, 473
of structural commands, 255, 466
of top matter commands, 273–281, 331
of user-defined commands, 374
of user-defined environments, 380, 382, 384
use square brackets ([ ]), 15, 27, **69–70**, 123, 132, 135, 285
bibliographic fields, 425, 428–436
hyphens, 13, 82, **82**, 96
options
of document classes, *see* document class options
of packages, *see* package options
organization (BIBTEX database field), 425, 431
organization of files, 476–479
orientation of pages, document class options for, 307
orthogonality of font commands, **94**
\oslash (⊘ math op.), *506*
OT1 font encoding, 544
\otimes (⊗ math op.), *506*
out (hyperref bookmarks file), 321
\overbrace (horizontal brace com.), **178**, 183
with a superscript, 178
overdot (˙ text accent), *79*, *516*
\overfullrule (length com.), 96
overlapping braces, 72
overlays, *see also under* presentations
commands for, 337
layering, 334
\overleftarrow ($\overleftarrow{x}$ math arrow), 179
\overleftrightarrow ($\overleftrightarrow{x}$ math arrow), 179
\overline ($\overline{x}$ math line sym.), 177, **179**, 185
overprint (beamer env.), 359

\overrightarrow ($\overrightarrow{x}$ math arrow), 179
\overset (symbol-building com.), 183, **192**, 372
  creating binary operations and relations with, 193
\owns (∋ binary rel.), *503*

P
\P (¶ pilcrow or paragraph)
  math symbol, *508*
  text symbol, *81*, *518*
package options, *see also* specific packages, 249, 257, 298–299, 301, 320–322, 386, 512, 545, 546, 548
  are passed down from document classes, 250
  handled electively, 313
  preventing loading of, 300
packages, 36, 249, 311, 522, 524–526
  accents, 178
  afterpage, 312
  alltt, 147, 311, 534
  amsbsy, 301, 302, 528
  amscd, 301
  amsfonts, **301–302**, 528
  amsgen, 301, 302
  amsmidx, 302
  amsmath, xxvi, 53, 231, 299, **300**, 301, 302, 403, 524, 525, 528, 533
  amsopn, 301, 302
  amssymb, 37, 180, 294, 300, 301, 374, 528
  amstext, 301, 302
  amsthm, 302, 525
  amsxtra, 176, 177, 300, 301
  apalike, 437
  array, 312
  automatic loading of, 53, 349, 528, 529
  babel, 312, 547–548
  backref, 320
  biblatex, 447
  bm, 312
  booktabs, 140
  calc, 312, 403, 406
  commands in, 386
  cyrillic, 312
  dates of, 533
  dcolumn, 136, 313
  delarray, 313
  distribution, AMS, 271, **300–302**, 325, 380, 417, 436, 437, 521, 528, 553
  documentation for, 113, 261, 312, 313, 359, 380, 545, 546, 553
  enumerate, 123, 313, 382, 387
  eucal, 301, 302, 386, 512
    options, **301**, 390, 512
  eufrak, 302
  exscale, 301, 311
  fancyhdr, 270, 537, 540
  fileerr, 313
  fontenc, **545**, 547, 548
  fontsmpl, 313
  ftnright, 313
  geometry, 270
  graphics, 312
  graphicx, 37, 39, 250, 259–260, 300, 523, 552
  hhline, 140, 313
  hyperref, 320–323
  in required directory, 312
  in tools directory, 312–313
  in unpacked directory, 311
  indentfirst, 313
  inputenc, 547
  interdependencies of, 271
  latexsym, 37, 180, 249, 294, 300, 311
  layout, 268, 313
  loading with \usepackage, 70, 249
    multiple, 250
  longtable, 313
  lucidabr, 546
  makeglos, 464
  makeidx, 311, **450**, 478
  mathtime, 545
  mathtools, 206
  multicol, 101, 307, 313
  newlattice, 250, 386, 387
  nfssfont, 311
  obtaining the AMS packages and AMSFonts, 540
  options, *see* package options
  paralist, 123
  psnfss, 312
  rawfonts, 313
  setspace, 99
  showidx, 311, *453*
  showkeys, 257, 313
  somedefs, 313
  source files, 250, **310**, 437, 540
  tabularx, 313
  theorem, 313
  times, 544
  tools, 312
  trace, 313
  updates to AMSFonts and amsmath, 533
  upref, 300, 301
  varioref, 258, 313
  verbatim, 86, 87, 147, 313, 387
  versions of, 524, 525, 532–534
  xcolor, 325, 348
  xr, 258, 313

xspace, 313, 368–369
xy-pic, 242
page (counter), 399, *399*
pagebackref (opt. of hyperref pack.), 320, 321
\pagebreak (page breaking com.), **100**, 484, 486
optional arguments of, 100
\pagename (redef. name), *376*
\pagenumbering (page-number style com.), 401
\pageref (cross-ref. com.), 28, 29, 31, 202, 255, **258**, 267, 322, 484
\pageref* (hyperref cross-ref. com.), 322
pages
breaking, 15, **100–101**, 261
in align environment, 242
in cases subsidiary environment, 242
in displayed math environments, **242–243**
in gather environment, 242
in multiline math environments, 243
preventing, 242
components of, 268
headers, *see* running heads
layout of, **268–270**, 313
for amsart document class, *269*
numbering, style of, 401
odd, starting chapters on, 468
orientation of, document class options for, 307
referencing, 202, 258
with varioref package, 313
size changing with \enlargethispage, 101, 484, 487
styles of, 268–270
title, 535
document class options for, 249, 299, 300, 307
of articles, 37, 249, 251
of books, 467, 469
of presentations, 55
pages (BibTeX database field), 425
page ranges in, 427
\pagestyle (set page style), 268
pagination, 484–486
paper size, document class options for, 298, 306
\par (paragraph breaking com.), **64**, 65, 73, 90, 273
\par (paragraph-breaking com.), 95, 118, 124
in error messages, 99
\paragraph (struct. com.), **252**, 466
paragraph (counter), *399*
paragraph boxes, 110–112
paragraph text symbol, *see* \P
\paragraph* (struct. com.), 253
\paragraphname (hyperref redef. name), *323*
paragraphs, 64, **99–100**
breaking into lines, 12, 96, 97, 530
breaking lines in, 82
hanging indents, 99
horizontal alignment of, 124
indentation of first lines, 99, 103, 313, **404**
interline spacing of, 23
terminating
with blank lines, 11, **64**, 99, 118, 144
with \par command, **64**, 65, 73, 90, 95, 99, 124
vertical spacing between, 124, 404, 407, 413, 481
paralist (pack.), 123
\parallel (‖ binary rel.), *503*
\parbox (box com.), 107, 109, **110, 111**, 138, 405
in tabular environments, 111
parentequation, 401
parentheses (( )), 8, 62
as math delimiters, **24**, 26, 166, *167*, 184, 217, *509*
in index entries, 455
suppressing the use of in tags, 202
\parindent (length com.), **404**, 414
\parsep (length com.), **407**, *408*, 413, 414
\parskip (length com.), **404**, 407, *408*, 414, 481
\part (struct. com.), 253, 304, 350, **466**
part (counter), *399*
\partial (∂ math sym.), *508*
\partname (redef. name), *376*
and hyperref package, *323*
\partopsep (length com.), 407
parts
in books, 466
in presentations, 354
Patashnik, Oren, 421, 446, 559
pathnames, on Mac, PC, and UNIX systems, 479
\pause (beamer com.), 333, **333**, 334, 337
pc (point abs. unit), 403
pcr (PSNFSS font name), 544
PCs, xxvi, 3, 4, 9, 479, 522
FTP clients, 538
LaTeX front end, 3, 326, 489
LaTeX implementations, 490–494
line ending characters, 9
WinEdt LaTeX front end, xxvi, 9, 11, 53, 442, 461, 490, 491, *492*

PDF (Portable Document Format), 318–319, 486
files
bibliographic citations in, 321
bookmarks in, 321
creating, 319
external hyperlinks in, 322–323
for graphics, 39, **259**, 326
for legacy documents, 319
for presentations, 53–58, 325–359
hyperlinks in, 319–323
JavaScript in, 318
putting on the Internet, 319
size of, 318
suppressing hyperlinks in, 322
typeset, 5, 318, 326
viewing in Web browsers, 318
fonts
partial downloading of, 318
proprietary, 318
pdftex (opt. of hyperref pack.), 320
percent (%)
as comment character, 6, 10, 19, 21, 61, **85–86**, 141, 294, 458
in BibTeX databases, 86, 443
as text symbol, 9, *77*, *81*, *518*
in e-mail addresses, 278
periods (.), 9, 62, **66–67**
and initials, 67
and italic correction, 92
and spacing rules, 66–67
end of sentences, 66
following capital letters, 67
in abbreviations, 66
in bibliographies, 66
in BibTeX databases, 426
terminating sentences with, **64–67**
\perp (⊥ binary rel.), *503*
personal computer, *see* computer, Mac, *or* PC
Personal TeX, Inc., 545
personalized templates
for AMS document classes, 294–297
\phantom (spacing com.), **102–103**, **191–192**, 223, 406
PHDTHESIS (bibl. entry type), 425, **433–434**
\Phi (Φ Greek char.), *502*
\phi (ϕ Greek char.), *502*
phv (PSNFSS font name), 544
\Pi (Π Greek char.), *502*
\pi (π Greek char.), *502*
pica (pc abs. unit), 403
picture (drawing env.), 259, 551
portability of, 552
pilcrow (¶ text sym.), *81*, *518*
\pitchfork (⋔ binary rel.), *504*
placement
of commas in formulas, 155
of equation numbers, 298, 307
of equations, 298, 307
of figures, **260**, 484, 486
of \index commands, **458**, 486
of index in document, 450, 461
of \label commands, 486
of limits, 299
of roots, 162
of tables, 484, 486
of text boxes, 115
plain
BibTeX style, *421*
page style, 268
theorem style, **129**, 129–131
Plain TeX, 552
plain text, 9
plain.bst (BibTeX style file), *421*
plain.tex (Plain TeX source file), 528
platform independence
of graphics, 325
of source files, 3, 9
platforms, *see under* Mac, PC, *and* UNIX
plus (+), 22, 188, 191, 192, 216–218
as binary operation, *506*
plus and minus rule, **188**, 191, 192
and subformulas, 216
in multline environments, 213
\pm (± math op.), *506*
pmatrix (subsid. math env.), 25–26, **235**
\pmb (poor man's bold font com.), **198–199**, 301
\pmod ((mod) math op.), 24, **173**, *174*
\pod (() math op.), 24, **173**, *174*
poetry, typing, 144–145
point (pt abs. unit), 12, 15, 54, 89, 93, 95, 96, 105, 107, 110, 111, 308, 403
poor man's bold, **198–199**, 301
portability
of bibliographic databases, 426, 428
of illustrations, 552
of LaTeX files, 9
of prohibited characters, 64
of TeX files, 9
Portable Document Format, *see under* PDF
Portable Graphics Format, 325
position, of proclamation numbers, 131
PostScript (PS), 317
documents on the Internet, 317
files
converting to PDF, 319
including fonts in, 317
putting on the Internet, 319
size of, **317**, 319
fonts, 317, 523, **543–546**

AMSFonts, 300, 301, 524, 525, 533
Computer Modern, 523, 525, **543**
European Modern, 524
obtaining, 546
using with LaTeX, 312, 545
PostScript New Font Selection Scheme, *see* PSNFSS
\pounds
math symbol (£), *508*
pound sign or sterling (£), *519*
\Pr (Pr math op.), *172*, *510*
preamble, **35–37**, **248–251**
commands in, 13, 35, 53–55, 70, 85, 86, 99, 125, 127, 129, 131, 156, 173, 196, 249, 250, 294, 300, 320, 326–327, 366, 382, 386, 402, 463, 478, 486, 531, 532
customizing, in template files, 44, 294
defining counters in, 400
proclamations defined in, 250
user-defined commands in, 250, 366
\prec ($\prec$ binary rel.), *503*
\precapprox ($\precapprox$ binary rel.), *504*
\preccurlyeq ($\preccurlyeq$ binary rel.), *504*
\preceq ($\preceq$ binary rel.), *503*
\precnapprox ($\precnapprox$ neg. binary rel.), *505*
\precneqq ($\precneqq$ neg. binary rel.), *505*
\precnsim ($\precnsim$ neg. binary rel.), *505*
\precsim ($\precsim$ binary rel.), *504*
preparation
final, of books, 482–487
of illustrations, 483
presentations, **53**, **325**
abstracts in, 53–55
babybeamer1, *334*, 333–335
babybeamer2, 333
babybeamer3, *338*
babybeamer4, *340*
babybeamer5, 341
babybeamer6, 341
babybeamer7, *346*, 345–347
babybeamer8, *348*
babybeamer9, *351*
babybeamer10, 359, *360*
beamerstructure1, *352*
beamerstructure2, 354, *354*
body of, 327
columns in, 347–348
commands for, 53, 55, 349, 351, 357
optional arguments of, 351
cross-referencing within, 328
equations in, 328
file formats
PDF, 326
flexibility in, 358
frames in, 358
hyperlinks in, 343–347, 358
in color, 348–350
lists in, 339–341
navigation symbols, 354
notes in, 355, *356*
overlays in, **333**, 333–343
commands for, 333, 335, 337
examples of, 335–337
layering, 334, 335
specifications, 337, 341
syntax of, 337–339
parts in, 354
planning, 358
preamble of, 53–55, 326–327
quickbeamer1, 328, *329, 330*, 333
quickbeamer2, 331, *332*, 333
sectioning of, 55, 328, 331
sidebars, 331
sidebars in, 343, 350
slides, 333
structure of, 350
tables of contents in, 351, 358
themes for, 328, 331, 356, **356**, 357
color options, 357
font options, 357
theorems in, 358
top matter of, 53–55, 326–327, 331
with beamer document class, 325–359
with FoilTeX, 53
preventing
case changes in bibliographic entries, 427
hyphenation, 83–84, 107
indentation of paragraphs, 99
line breaks, 99, 107
page breaks, **98**, 100, 242
removal
of horizontal space, 103
of vertical space, 105
spaces following environments, 383
\prime (′ math sym.), *508*
prime (′), 23, 159, 194, *508*
primitive commands, 377, 528
printers
drivers for, 526, **530**
specifying for hyperref package, 320
DVI drivers for, 312, 539
\Printindex (index com. for multiple indexes), 464
\printindex (index com.), **450**, 461
printing
typeset (DVI) files, 530
typeset (PDF) files, 530
proc (doc. class), 529
proc-l (doc. class), 272, *376*

PROCEEDINGS (bibl. entry type), 425, 432–433, **436**
proceedings, conference, in BibTeX database files, 424
processed
  bibliography files, *see* bbl
  index files, *see* ind
processing
  bibliographies, 437–446
  indexes, 459–461
proclamations, 37, 46, 117, **124–131**, 407
  commands for
    \newtheorem (procl. com.), 37, **125**, 127, 129, 131, 294, 402
    \newtheorem* (procl. com.), **129**, 382
    \newtheoremstyle, 131
    \theoremstyle (procl. com.), 129–131
    \theoremstyle* (procl. com.), 129–131
  counters for, 399
  defining, 37, 46, **125**, 127, 128, 131, 294, 382, 402
    in preamble, 250
    with theorem package, 313
  environments for
    theorem, 37, 46, 52, 54, 125, 128, 343, 384
  invoking, 37, 46, 52, **125**, 128, 343, 384
  lines following, 118
  lists in, 126
  logical design using, 535
  names of, 55, 128
  numbering of
    consecutively, 127–128
    within sections, 127
  position of numbers, 131
  styles of, **129–131**, 524
    definition, **129**, 129–130
    plain, **129**, 129–130
    remark, **129**, 129–130
  unnumbered, 129, 130, 382
\prod ($\prod$ large math op.), *175*, *511*
productivity tools, **5**, 494, 498, *see also* synchronization, block comment, jump to a line
products, 26, 27, 174
products.eps (sample illus. file), 39
products.pdf (sample illus. file), 39, 54, 327
programming, in TeX, 553
programs, typing, 141–143, 145–147
prohibited keys, 9, 63
\projlim (proj lim math op.), *172*, *510*
prompts, **534–535**
  * (interactive), **113**, 376–378, **534**
  **, 534
  ?, 20, 48, 491, 534
  file name, 534
  responding to, 20, 48, **534–535**
proof (text env.), 39, 117, **131–133**, 302, 327
  changing q.e.d. symbol, 374
  lines following, 118
  lists in, 131
  optional arguments of, 132
  placement of q.e.d. symbol, 132
\proofname (redef. name), *376*
proofs, 131–133
proportional fonts, 88
propositions, *see* proclamations
\propto ($\propto$ binary rel.), *503*
\protect (protect fragile commands), **74**, 252, 253, 466, 475
protecting
  capitalization in bibliographic entries, 427
  fragile commands, **74**, 252, 253, 466, 475
protocols
  File Transfer, *see* FTP
  Hypertext Transfer, *see* HTTP
\providecommand (user-defined com.), 373, **375**, 378
\providecommand* (user-defined com.), 373
\ProvidesPackage (pack. com.), 534
providing commands, 375
PS, *see* PostScript
ps2pdf (opt. of hyperref pack.), 320
psamsfonts
  amsfonts package option, 301
  document class option, 300
psfonts.ins (PSNFSS distr. file), 544
\Psi (Ψ Greek char.), *502*
\psi (ψ Greek char.), *502*
PSNFSS (PostScript New Font Selection Scheme), 544, 545
  distribution, 540, 544–545
  font names (Berry scheme), 544
psnfss (LaTeX distr. directory), 311
psnfss (pack.), 312
pt (point abs. unit), 12, 15, 54, 89, 93, 95, 96, 105, 107, 110, 111, 308, 403
ptm (PSNFSS font name), 544
publisher (BibTeX database field), 424, 425
publishers, preparing manuscripts for, 465
punctuation
  in BibTeX databases, 423–428, 445–446
  marks, 9, 14, **62**, **75–76**, *81*, 156, 368, *515*, *518*

Q

q.e.d. symbol, 132, 374
\qedhere (proof com.), 133
\qedsymbol ($\square$ math sym.), 131, 374

suppressing, 132
\qquad (spacing com.), 27, 102, 105, 190, *190*, 224, *513*, *520*
\quad (spacing com.), 24, 27, 102, 105, 154, 190, *190*, 225, *513*, *520*
question marks (?), 9, 62
Spanish (¿), *81*, *515*, *518*
terminating sentences with, 64–67
quickbeamer.pdf (sample file), 326
quickbeamer.tex (sample file), 326–328
quickbeamer1.pdf (sample file), 328
quickbeamer1.tex (sample file), 328
quickbeamer2.pdf (sample file), 331
quickbeamer2.tex (sample file), 331
quiet mode, 534
quotation (disp. text env.), **144**, 407
quotation marks, 9, 63, **75**, *81*
double quote key, 9, 62, 63, **75**
in BibTeX database fields, **424**, 445, 446
in BibTeX entries, 436
in \index commands, 457
European, *519*
single quote key, 9, 23, 62, **75**
typing, 11
quotations, typing, 143–144
quote (disp. text env.), **143**, 407
\quotedblbase (Eur. quot. mark), *519*
quoting, special characters in \index commands, 457

R

\r (˚ ring text accent), *79*, *516*
\raggedleft (align. command dec.), 124
\raggedright (align. command dec.), 124
Rahtz, Sebastian, 259, 319, 523, 542, 558
\raisebox (box com.), 115
ranges, numeric, **14**, **75**, *81*, *518*
in BibTeX databases, 424, 427
in index entries, 454
\rangle (⟩ math delimiter), *167*, **168**, *509*
rawfonts (pack.), 313
\rbrace (} math delimiter), *167*, *509*
\rbrack ( ] math delimiter), *167*, *509*
\rceil (⌉ math delimiter), *167*, *509*
\Re (ℜ math sym.), *508*
read-only, making templates, 297
readability
of documents, 93, 358
of source files, 19, 22, 65, 135, 154, 166, 363–367, 379, 415
Reader, Adobe Acrobat, *see under* Adobe Reader
real numbers, in length commands, 403
redefinable names, 322, *323*, 363, **375**, *376*, 548
redefining commands, 374–375
\ref (cross-ref. com.), 28, 29, 31, 123, 156, 202, 215, 255, **255**, 258, 301, 313, 322, 384
\ref* (hyperref cross-ref. com.), 322
references
bibliographic, 29, 40–41, 48, 66, **261–267**, 328, 375, 407, 437, 442
citing, 29, 47, **264**, 441
citing with BibTeX, 439
including without citing, **439**, 441
defining, 28, 29, 31, 50, 156, 215, 231, 252, **255**, 328
symbolic, showing in margins, **257**, 313
to equations, **28**, 29, 31, 156, 202, 203, 215, 219, 255, 256, 263, 328
to pages, 28, 29, 31, 202, 255, **258**, 322, 484
and varioref package, 313
to sections, 28, 29, 31, 123, 156, 202, 215, **255**, 258, 301, 313, 322, 384
referencing, *see* cross-referencing *or* symbolic referencing
\refname (redef. name), *376*
\refstepcounter (cross-ref. counter incr. com.), 402
registered trademark (® text sym.), *81*, *518*
registers, 377
relations, binary, *see* binary relations
relative
numbering of equations, 29, 201, 203
spaces, 105
units, 105, 107, 111, **403**
\relax (do nothing com.), 385
release dates, of LaTeX, 86, 251, 532
remark (procl. style), **129**, 129–131
\renewcommand (user-defined com.), 87, 88, 99, 123, 132, 139, 267, 322, 370, 373, **374–375**, 378, 382, 383, 400–402
\renewcommand* (user-defined com.), 373
\renewenvironment (user-defined com.), 383, **385**
\renewenvironment* (user-defined com.), 385
renumbering, automatic, 28, 536
report (doc. class), 253, 303, **303–308**, *376*, 529
reports, technical, in BibTeX database files, 434–435
reqno
amsmath package option, 302
document class option, 249, **298**, 307

required
arguments, 111, 112, 179, 194, 272, 273, 535
multiple, 19, 70, 137, 192, 194, 268, 311, 379, 404–406
of commands, 19, **69**, 137, 192, 194, 257, 268, 280, 404, 473, 478, *516*
of environments, **69**, 135, 136, 224, 226, 236, 237, 263–264, 266, 309, **383**–**385**, 476
use braces (`{}`), 8, 14, 19, **69**, 70, 530
bibliographic fields, 425, 426, 428–436
`required` (LaTeX distr. directory), **311**, 540
packages in, 312
`\RequirePackage` (pack. com.), 386, 387
research support (`\thanks` top matter com.), 44, 87, 279, 281, 296, 304
resetting counters, 400, 402
resolution, of Type 1 fonts, 543
Return key, 9, 11, 21, 48–51, 63, 153, 491, 534
`\rfloor` (⌋ math delimiter), *167*, *509*
`\rhd` (▷ math op.), *506*
`\rho` (ρ Greek char.), *502*
`\right` (math delim.), **167**–**168**, 170, 184, 235
blank, 168, 182
must be balanced, 168, 217
right double quote (")
text symbol, 75, *81*, *518*
typing, 11
right justification of text, 8, 14, 68
right single quote (')
key, 9, 11, 62, **75**
text symbol, **75**, *519*
`\right)` ( ) math delimiter), 24, 26, 166, 168, 184, 217, 235
`\right.` (blank math delim.), 168
`\right>` (⟩ math delimiter), 168
`\right]` ( ] math delimiter), 24, 166, 182
`\Rightarrow` (⇒ math arrow), *507*
`\rightarrow` (→ math arrow), *507*
`\rightarrowtail` (↣ math arrow), *507*
`\rightharpoondown` (⇁ math arrow), *507*
`\rightharpoonup` (⇀ math arrow), *507*
`\rightleftarrows` (⇄ math arrow), *507*
`\rightleftharpoons` (⇌ math arrow), *507*
`\rightmargin` (length com.), **407**, *408*, 411
`\rightrightarrows` (⇉ math arrow), *507*
`\rightsquigarrow` (⇝ math arrow), *507*
`\rightthreetimes` (⋌ math op.), *506*
`\right|` (| math delimiter), 24, 26, 168, 180, 189, 191
ring (˚ text accent), *79*, *516*
ring A (Å), *81*, *515*
ring a (å), *81*, *515*
`\risingdotseq` (≓ binary rel.), *504*
Ritter, R. M., 553
`\rm` (obs. LaTeX 2.09 font com.), 94
`\rmfamily` (font shape com. dec.), *90*, 123, *516*
`rmfamily` (font shape env.), 123
`\Roman` (uppercase roman-numeral counter-style com.), *401*
roman
document font family, 89, **89**, 544
font shape, 28, 88, *90*, **123**, 301, *516*
math, 173, **196**, *196*
`\roman` (lowercase roman-numeral counter-style com.), 123, *401*
roots, 27, 161–162
n-th, 27, **162**
placement of, 162
square, 27, **161**
using struts with, 200
Rose, Kristoffer H., 242
row separator (`\\`), 25, 30, 31, 33, 44, 46, 98, 124, 135, 141, 142, 145, 176, 211, 213, 215, 216, 227, 231, 242, 273–278, 297, 304, 309
Rowley, Chris, xxxiii, 523, 524, 559
`\Rrightarrow` (⇛ math arrow), *507*
`\Rsh` (↱ math arrow), *507*
`\rtimes` (⋊ math op.), *506*
rubber lengths, **378**, **406**, 407, 530
`\rule` (box com.), 113, 114, 140
rules (lines), filling lines with, *see also* lines (rules), 106, 113
running
BibTeX, 437–446
MakeIndex, 459–461
running heads, 56, 252, **268**–**270**
author's name in, 276
fragile commands in, 74
title in, 274, 297
`\rVert` (‖ math delimiter), 168
`\rvert` (| math delimiter), 168

S

`\S` (§)
math symbol, *508*
section text symbol, *81*, *518*
`sampart-ref.tex` (sample file), 320, 323
`sampart.tex` (sample file), 125, 129, 131, 230, 266, 272, 273, **285**–**293**, 371, 392, 437, 536

source file, 290–293
typeset, 286–288
`sampartb.aux` (sample aux. file), 441, 442
`sampartb.bbl` (sample bibl. file), 441–443
`sampartb.bib` (sample bibl. file), 437, **437–443**
`sampartb.blg` (sample BibTeX log file), 441, 442
`sampartb.tex` (sample file), 421, 437, 439–441, 443
`sampartu.tex` (sample file), 376, 383, **392–398**, 535
sample files
`amsart.tpl`, 294
`amsproc.template`, 297
`babybeamer1.pdf`, 333–335
`babybeamer2.tex`, 334
`babybeamer3.tex`, 338
`babybeamer4.tex`, 343
`babybeamer5.tex`, 341
`babybeamer6.tex`, 343
`babybeamer6block.tex`, 343
`babybeamer7.tex`, 343, 345–347
`babybeamer8.tex`, 347
`babybeamer9.tex`, 349
`babybeamer10.tex`, 359
`beamerstructure.tex`, 352, 354
`bibl.tpl`, 47
`cleardoublepage.sty`, 101
`fonttbl.tex`, 78, 134
`formula.tex`, 164–166
`gg.tex`, 44–48
`gg2.tex`, 45–46
`ggamsart.tpl`, 297
`inbibl.tpl`, 263
`intrart.tex`, **35–43**, 53, 55, 326, 331
typeset, 41–43
`intrarti.tex`, 450–452, *460*, 459–461
`intropres.tex`, 53, 55, *57–58*
`legacy-article.tex`, 304, 305
`letter.tex`, 308–310
`math.tex`, 17–19
`mathb.tex`, 19–22
`myams.tpl`, 294–297
`newlattice.sty`, 311, 379, 383, **386–392**
`note1.tex`, 9–11
`note1b.tex`, 12–13
`note2.tex`, 13–15
`noteslug.tex`, 13
obtaining, 4
of presentations, 54, 326–331
`products.eps` (illus. file), 39
`products.pdf` (illus. file), 39, 54, 327
`quickbeamer.pdf`, 326
`quickbeamer.tex`, 326–328
`quickbeamer1.pdf`, 328
`quickbeamer1.tex`, 328
`quickbeamer2.pdf`, 331
`quickbeamer2.tex`, 331
`sampart-ref.tex`, 320, 323
`sampart.tex`, 125, 129, 131, 230, 266, 272, 273, **285–293**, 371, 392, 437, 536
source file, 290–293
typeset, 286–288
`sampartb.bib`, 437, **437–443**
`sampartb.tex`, 421, 437, 439–441, 443
`sampartu.tex`, 376, 383, **392–398**, 535
`sample.cls` (doc. class), 10, 11
`SymbolTables.pdf`, 4, 9, 15, 19
`template.bib`, 423, 437, 446
`topmat.tpl`, 282
`sample.cls`, 11
`sample.cls` (doc. class), 10
samples
font, 313
of bibliographies, 47, **261–263**, 423, 437, **437–438**, 446
of command (style) files, 311, 379, 383, **386–398**
of indexes, *452*, 450–452
`samples` (folder), **4**, 9, 10, 12–15, 18–20, 35, 39, 44, 45, 47, 48, 78, 101, 134, 230, 263, 282, 285, 294, 297, 304, 308, 320, 326–328, 331, 333, 339, 341, 343, 354, 358, 359, 376, 386, 392, 423, 437, 438, 450, 468, 496, 535, 548
creating, 4
sans serif
document font family, **89**, 94, 544
font shape, 55, 89, *90*, **123**, **196**, *196*, *512*, *516*
Helvetica, 89, 544
`\sb` (math subscript com.), 159
`\sc` (obs. LaTeX 2.09 font com.), 94
scaling graphics, 54
in figures, 259
in FoilTeX, 54
Schöpf, Rainer, 523, 559, 560
Schandl, Bernd, 123
scharfes s (ß, SS), *81*, *515*
Schleyer, Antoinette Tingley, 217, 553, 560
`school` (BibTeX database field), 425
Schröder, Martin, 523

scope
delimited by braces, **71**–**73**
of `\allowdisplaybreaks` commands, 242
of command declarations, 124, **367**–**368**, 382
of commands, **71**–**73**, 90, 139
global and local, 74
setting, with environments, 96, 213
`\scriptscriptstyle` (math font size com.), **199**, 204
`\scriptsize` (font size com.), **93**, *93*, *517*
`\scriptstyle` (math font size com.), **199**, 204
`\scshape` (font shape com. dec.), *90*, **91**, 123, *516*
`scshape` (font shape env.), 123
`\searrow` ($\searrow$ math arrow), *507*
`\sec` (sec math op.), *172*, *510*
`secnumdepth` (counter), 403
`\section` (struct. com.), 46, 55, **252**–**255**, 331, 350, 467
optional argument of, 253
`section` (counter), 398, *399*
section (§ text sym.), *81*, *518*
`\section*` (struct. com.), 46, 253, 467
sectioning
commands, *see also* structural commands
optional arguments of, 253
provided by `amsart` doc. class, *254*
provided by `article` doc. class, *254*
provided by book doc. classes, 466–467
syntax of, 253
of articles, 46, **252**–**255**
of books, **466**–**467**, 479
of documents, 11, 35–41, 46, 48, 49, 51, 52, 66, 68, 164, 248, 251, **252**–**255**, 261, 267, 285, 304, 308–310, 406, 437, 442, 449, 459, **466**–**467**, 522, 536
of presentations, 55, 328, 331
`\sectionname` (redef. name)
and `hyperref` package, *323*
sections, numbering of, 252
in books, 466
of equations within, 156, 250
of proclamations within, 127
`\see` (indexing cross-ref. com.), 457
`\seename` (redef. name), *376*
`\selectfont` (font selection com.), 95
selecting
files to include, **260**, 400, 477, **478**, 479, 496
fonts, 88–95
semicolon (;), 9, 62
sentences
terminating, 11, **64**–**67**
with periods, 279
`series` (BibTeX database field), 425
series commands, for fonts, *see under* font commands *and* font command declarations
serif (font shape), *see also under* roman, 89, **89**
Seroul, Raymond, 553, 560
`\setbeamercolor` (`beamer` com.), 350
`\setbeamertemplate` (`beamer` com.), 355
`\setcounter` (counter-setting com.), 74, 233, **399**, 402
`\setlength` (length setting com.), 99, 100, 113, **404**
`setlength` environment, 96, 213
`\setminus` ($\setminus$ math op.), *506*
`setspace` (pack.), 99
`\settodepth` (measurement com.), 406
`\settoheight` (measurement com.), 406
`\settowidth` (measurement com.), 406
`\sffamily` (font shape com. dec.), *90*, 94, 123, *516*
`sffamily` (font shape env.), 123
SGML (Standard Generalized Markup Language), 523
shape commands, for fonts, *see under* font commands *and* font command declarations
`\sharp` ($\sharp$ math sym.), *508*
short
arguments, of user-defined commands, 373–374
arguments, of user-defined environments, 385
commands, **73**, 90, 273, 284
pages, warnings about, 530
shorthand, *see under* user-defined commands
`\shortmid` ($\mid$ binary rel.), *504*
`\shortparallel` ($\parallel$ binary rel.), *504*
`\shoveleft` (align. com.), 214
`\shoveright` (align. com.), 214
`\show` (command-examination com.), 377, **377**, 378, 534
`\showhyphens` (hyph.-disp. com.), 84
`showidx` (pack.), 311, *453*
`showkeys` (pack.), 257, 313
options, 257

`\showthe` (value-examination com.), 113, **377**, 378, 534
shrinkable lengths, 56, 101, 102, **377**, **406**, 407, 413, **530**
side-setting, math symbols, 194–195
sidebars, in `beamer` presentations, 328, 331, 343
`\sideset` (math com.), **194**–**195**
`\Sigma` (Σ Greek char.), *502*
`\sigma` (σ Greek char.), *502*
`\signature` (letter com.), 309
`\sim` (∼ binary rel.), *503*
`\simeq` (≃ binary rel.), *503*
simple alignment, of formulas, *31*, 30–31
`\sin` (sin math op.), 26, 170, *172*, *196*, *510*
single
  guillemet, *519*
  quote, 11
    keys, 9, 23, 62, **75**
    text symbols, *519*
single quotation, *519*
single-lined boxes, *see under* boxes
`\sinh` (sinh math op.), *172*, *510*
size
  of files
    PDF, 318
    PostScript, **317**, 319
  of fonts, 55, 89, *93*, **93**–**94**, 123, *517*
    commands for, *see under* font commands
    document class options for, 297, 306
    in math, 199
  of hyperlinks in PDF files, 322
  of math delimiters, **168**–**170**, 184
  of paper, document class options for, 298, 306
`\sl` (obs. LaTeX 2.09 font com.), 94, 95
slanted (font shape), 88, *90*, **91**, 94, 95, **123**, 156, *516*
  and italic correction, 92
  context dependence of, 91
slashed L's and O's (ł, Ł, ø, Ø), *81*, *515*
slides, *see under* presentations
`slides` (obs. doc. class), 303, 529
`\slshape` (font shape com. dec.), *90*, **91**, 92, 94, 95, 123, *516*
`slshape` (font shape env.), 123
slugs, 13, 96, 249, 300, 307
`\SMALL` (font size com.), **93**, *93*, *517*
`\Small` (font size com.), **93**, *93*, *517*
`\small` (font size com.), **93**, *93*, *517*
small caps (font shape), 88, *90*, **91**, **123**, *516*
  for abbreviations and acronyms, 91, 480
`\smaller` (font size com.), 94
`\smallfrown` (⌢ binary rel.), *504*
`\smallint` (∫ math sym.), *508*
`smallmatrix` (subsid. math env.), 235
`\smallsetminus` (∖ math op.), *506*
`\smallskip` (spacing com.), **104**
`\smallsmile` (⌣ binary rel.), *504*
`\smash` (spacing com.), 115, **201**
  optional argument of, **201**
`\smile` (⌣ binary rel.), *503*
Snow, Wynter, 553, 560
Solaris, *see* UNIX
solid boxes, 113–114, *see also* struts
`solution` (`beamer` distr. directory), 358
`somedefs` (pack.), 313
sort keys, 455–456
  case sensitivity of, 462
sorting, of index entries, 455–456
source files, 4–5, *5*, **7**–**8**, 9, 18, 35, 51, 52, 64, 82, 87, 145, 271, 415, 447, 461, 473, 496, 525
  errors in, 19–22, 491, 498, 534
  naming of, **4**, 44
  platform independence of, 3, 9
  putting on the Internet, 317–323
    disadvantages of, 317
  readability of, 19, 65, 154, 166, 363–367, 379, 415
  structure of, *see also* `document`
  style parameters, *see* styles, document parameters for
  typesetting, **4**, 9, 12, 20, 28, 63, 74, 529, 534
  white space in, 19
sources, for fonts, *546*
`\sp` (math superscript com.), 159, 183
space bar, 9, 11, 53, 63, 325, 334
spaces
  at the beginning of a line, 64, 103
  at the end of a line, 64, 65, 84
  blue, *see also* tie, unbreakable spaces, nonbreakable spaces, 76
  consist of glue, 530
  expanding, 106
  filling lines with, 106
  in arguments of commands, 85
    `\bibtem`, 266
    `\cite`, 264
    `\index`, 462
  in command definitions, 367
  in command names, 69
  in delimited commands, 379–380
  in math environments, 153

spaces (*continued*)
in `tabular` environments, 135
in user-defined commands, 313
in `\verb` commands, 148
in `verbatim` environments, 146
interword (`\␣`), 11, **66**, 70, 102, *190*, *520*
multiple, act as one, 19, 64, 71
separating words with, 11, **64**, 383, 427
suppressing, 383, 458
terminating commands with, 19, **69**, **154**
typed for readability, 22, 65, 135, 367
unbreakable (`~` tie), **11**, 28, 63, **66**, 75, **76**, 99, *520*
absorb spaces, 76
in BibTeX databases, 427
with cross-references, 257
visible (`␣`), 11, 63
and `\verb*` command, 148
spacing
between characters, 530
between dots with `\hdotsfor` commands, 233
between math symbols, 187–192
commands, *see* spacing commands
determined by document classes, 102
horizontal
adjusting, 188
in math, **19**, **154**–**156**, **187**–**192**, 233, 236
in text, 11, **102**–**104**, 114, 126, 414, *513*, *520*
interword, 11, 64–67, 70, 76, 102, 383, 427, *520*
preventing removal of, 103
in text, **102**–**106**
intercolumn, 209, 220, *220*
in aligned math environments, 224, 228
in `tabular` environments, 136
interline, 242, 370, 482
adjusting, **95**, 98–99, 104, 114
double, 99
rules
and delimited commands, 379–380
for commands, 69, 154
in arguments of `\index` commands, 462
in math, 19, 154–156, 187–192, 200–201
in text, 11, 19, **64**–**67**, **102**–**106**
in `\text` commands, 154
vertical
adding to table of contents, 474
adjusting, 56, 139, 481
adjusting with the `setspace` package, 99
in boxes, 115
in indexes, 267, 449
in math, **200**–**201**
in text, 15, **104**–**105**, 201, 377, 474, 482, 486
preventing removal of, 105
using the `setspace` package, 99
spacing commands
avoiding direct use of, 481
horizontal, *see* horizontal spacing
vertical, *see* vertical spacing
`\spadesuit` (♠ math sym.), *508*
`\spbreve` (◡ math accent), 177, *177*, *512*
`\spcheck` (∨ math accent), *177*, 183, *512*
`\spdddot` (⃛ math accent), *177*, *512*
`\spddot` (¨ math accent), 177, *177*, *512*
`\spdot` (˙ math accent), *177*, *512*
special
braces, 18, 49, 72, 73, 152, 153, 157
balancing, 72
characters, 15, 63, **76, 77**, *77*, **78**, *515*–*519*
in `\index` commands, 457
keys, 9, 17, **63**, 76
spelling checkers, 48, 495
`\sphat` (◠ math accent), *177*, *512*
`\sphericalangle` (∢ math sym.), *508*
Spivak, Michael D., 522, 545
`split` (subsid. math align. env.), *208*, 211, **230**–**231**, 298
and `\allowdisplaybreaks` commands, 243
numbering of equations within, 230–231
rules for, 231
splitting
documents into multiple files, 476–479
formulas across lines, 212–214
`\sptilde` (∼ math accent), *177*, *512*
`\sqcap` (⊓ math op.), *506*
`\sqcup` (⊔ math op.), *506*
`\sqrt` ($\sqrt{x}$ math com.), 19, 27, **161**
optional argument of, 70
`\sqsubset` (⊏ binary rel.), *503*
`\sqsubseteq` (⊑ binary rel.), *503*
`\sqsupset` (⊐ binary rel.), *503*
`\sqsupseteq` (⊒ binary rel.), *503*
`\square` (□ math sym.), *508*
square roots, 27, **161**

\SS (SS), *81*, *515*
\ss (ß), *81*, *515*
stacking math symbols, 192–193
Standard Generalized Markup Language (SGML), 523
\star (⋆ math op.), *506*
starred commands and environments, *see under* *-form *and* specific commands *and* environments
start of chapters, document class options for, 468
\stepcounter (counter-incr. com.), 402
sterling (£ text sym.), *519*
\stop (interactive control com.), 535
stretchable
  horizontal braces, 178–179
  lengths, 102, **378**, **406**, 407, 530
  lines, 179
  math arrows, **179**, 240–242
  math delimiters, 167–168
  math symbols, 178–180
  vertical spacing, in displayed text environments, 406
STRING (bibl. entry type), 436
structural commands
  \appendix, 255, 467
  \backmatter, 467
  \chapter, 253, 255, 304, 466, **466**, 467
  \frontmatter, 467
  hierarchy of, 252, 466
  in presentations, 350
  \mainmatter, 467
  optional arguments of, 253
  \paragraph, **252**, 466
  \paragraph*, 253
  \part, 253, 304, **466**
  provided by amsart doc. class, *254*
  provided by article doc. class, *254*
  provided by book doc. classes, 466–467
  \section, 46, **252**–**255**, 467
  \section*, 46, 253, 467
  \subparagraph, **252**, 466
  \subsection, 46, **252**, 466, 467
  \subsection*, 46, 467
  \subsubsection, 46, **252**, 466
  \subsubsection*, 46
  syntax of, 253
structures, theorem-like, *see* proclamations
struts, **114**, 139, 200
style (sty) files, *see also* packages, 250, **366**, **386**–**392**
  commands in, 386
  terminating, 392
style files, BibTeX, *see* bst
styles
  bibliographical, *see also* bst, 266
  document parameters for, 552
  for counters, 87, 123, 382, *401*, **400**–**401**, 411
  of pages, 268–270
  of proclamations, **129**–**131**, 524
  of tables, 140
  text environments, 123
subarray (subsid. math env.), 161, 176
subentries, in indexes, 267, 449, **453**, 454, 456
subequations (disp. math env.), **203**, 204, 219, 401
subformulas
  indentation of, 217
  rules for, **215**–**217**, 223–224
  shorthand commands for, 364–366, 372–373
\subitem (index com.), 267, 449
\subjclass (top matter com.)
  optional arguments of, 279
  rules for using, 279
\subjclassname (redef. name), *376*
subject classifications, AMS, 279
\subparagraph (struct. com.), **252**, 466
subparagraph (counter), *399*
subscripts, math, **23**, 25, **158**–**159**, 161, 182
  as limits, **25**, **161**, 171–176, 182, 299
  as multiline limits, 176
  double, 199
  font size of, 199
  with horizontal braces, 178
\subsection (struct. com.), 46, **252**, 350, 466, 467
subsection (counter), *399*
\subsection* (struct. com.), 46, 467
\subsectionname (hyperref redef. name), *323*
\Subset (⋐ binary rel.), *504*
\subset (⊂ binary rel.), *503*
\subseteq (⊆ binary rel.), *503*
\subseteqq (⫅ binary rel.), *504*
\subsetneq (⊊ neg. binary rel.), *505*
\subsetneqq (⫋ neg. binary rel.), *505*
subsidiary math environments
  aligned, 211, **227**–**230**, 243
  alignedat, **227**–**230**, 243
  and \allowdisplaybreaks commands, 243
  array, *208*, 210, 229, 232, **236**–**238**, 312, 313, 523, 551, 552
  Bmatrix, **235**
  bmatrix, **235**

subsidiary math environments (*continued*)
`cases`, 33, *208*, 210, **239**
`CD`, 240–242
for aligning formulas, *208*, **209**, **227**–**231**, 243, 298
`gathered`, 211, 227–230, 243
`matrix`, 25–26, *208*, 210, 231, **232**–**238**
numbering of, 230, 231
page breaks in, 242
`pmatrix`, 25–26, **235**
`smallmatrix`, 235
`split`, *208*, 211, **230**–**231**, 243, 298
`subarray`, 161, 176
`Vmatrix`, 183, **235**
`vmatrix`, 25, 26, **235**
`\substack` (math com.), 161, 176, **176**
substitution, of fonts, 94, 318, 484
subsubentries, in indexes, 267, 449, **454**, 456
`\subsubitem` (index com.), 267, 449
`\subsubsection` (struct. com.), 46, **252**, 466
`subsubsection` (counter), *399*
`\subsubsection*` (struct. com.), 46
`\subsubsectionname` (redef. name), 322
subtraction, 22, 63, 157
`\succ` ($\succ$ binary rel.), *503*
`\succapprox` ($\succapprox$ binary rel.), *504*
`\succcurlyeq` ($\succcurlyeq$ binary rel.), *504*
`\succeq` ($\succeq$ binary rel.), *503*
`\succnapprox` ($\succnapprox$ binary rel.), *505*
`\succneqq` ($\succneqq$ binary rel.), *505*
`\succnsim` ($\succnsim$ binary rel.), *505*
`\succsim` ($\succsim$ binary rel.), *504*
`\sum` ($\sum$ large math op.), 26, *175*, 198, *511*
with primes, 194
`sumlimits` (opt. of `amsmath` pack.), **299**
sums, 26, 27, 174
`\sup` (sup math op.), *172*, *510*
superscripts, **23**, 25, **158**–**159**, 161, 177, 182
as limits, **25**, **161**, 171, 174–176, 182
as multiline limits, 176
in math
as limits, 299
font size of, 199
with horizontal braces, 178
in text, 311, *519*
support, technical, *see* technical support
`\suppressfloats` (float com.), 260
suppressing
creation of auxiliary files, 486, 531
hyperlinks in PDF files, 322
indents (`\noindent` com.), 99, 484
italic correction, 92
ligatures, **79**, 181, 365
line breaks (`\nolinebreak` com.), 99
loading of the `amsmath` package, 300
numbering, 211, 215
of equations, 30, 31, 157, 201, 211, 213, 215, 218, 231, 270
of first page of documents, 270
of proclamations, 129, 130, 382
of structural units, 46, 253, 467
`Overfull \hbox` warnings, 96
page breaks (`\nopagebreak` com.), 100
placement of floats, 260
q.e.d. symbol, 132
spaces, 383, 458
`\Supset` ($\Supset$ binary rel.), *504*
`\supset` ($\supset$ binary rel.), *503*
`\supseteq` ($\supseteq$ binary rel.), *503*
`\supseteqq` ($\supseteqq$ binary rel.), *504*
`\supsetneq` ($\supsetneq$ binary rel.), *505*
`\supsetneqq` ($\supsetneqq$ binary rel.), *505*
`\surd` ($\surd$ math sym.), *508*
Sutor, Robert, 558
Swanson, Ellen, 217, 553, 560
`\swapnumbers` (theorem-style com.), 131
`\swarrow` ($\swarrow$ math arrow), *507*
`\symbol` (symbol com.), **77**, 311
symbol alphabets, math, **197**
blackboard bold, 197
calligraphic, 197
Euler Fraktur, 197
Greek, 197
symbolic references, showing in margins, **257**, 313
symbolic referencing, 28, *see also* cross-referencing, 29, **255**–**258**, 531
symbols
as footnote indicators, 87
math, 19, 20, 63, 131, 177, 182, 240, 249, 294, 311, *501–513*
alphabets, **197**
and delimiters, 24, 166, 168
bold, **197**–**199**, 301, 312
building new, 183, **192**–**195**, 372
classification of, **188**–**189**, 195
declaring types of, 195
end of proof, 113, 374
in text, 365
large, 227–229
negated, 194–195
shorthand commands for, 364
side-setting, 194–195

sizes of, 199
spacing of, 187–192
stacking, 192–193
stretchable, 178–180
suppressing, 131
text, 76, 77, 80, 278, *516*, *518, 519*
`SymbolTables.pdf` (sample file), 4, 9, 15, 19
synchronization (inverse search), **5**, 494, 498
systems of equations, 225–226
systems, operating, *see* Mac, PC, *or* UNIX

T
`\t` (‿ tie text accent), *79*, *516*
`T1` font encoding, 82, *519*, 547
tab
character, 63, 64, 68, 102
Tab key, 9, 11, 63
Tab key, 9, 11, 63
`tabbing` (display text env.), **141**–**143**, 551, 552
`table` (counter), *399*
`table` (float env.), **258**–**259**
optional arguments of, 260, 486
placement of, 484, 486
`table*` (float env.), 259
`\tablename` (redef. name), *376*
and `hyperref` package, *323*
`\tableofcontents` (front-matter com.), 328, **473**, 532
tables, **133**–**140**, 141, 237, **259**, 260, 313, 523, 551, 552
captions in, 134, **259**, 476
fragile commands in, 74
commands for, 135, 137–140, 259, 476
cross-referencing of, 134
designing, 140
double-column, 259
float controls, 134
forcing typesetting of, 101
hyphenation, 528
intersection of lines in, 140, **313**
lists of, *see under* lists
multiline entries in, 138
multipage, 313
numbering of, 258
placement of, 484, 486
style of, 140
typeset inline, 133
tables of contents, 252, 321, **473**–**475**
adding a line to, 473–474
adding vertical spacing to, 474
auxiliary file (`toc`), 473, 487, 532
commands, 473, 474
depth of, 403
fragile commands in, 74, 475
in frames, 328
in presentations, 358
typesetting, 473–475
tabs, setting, 141
`tabular` (table env.), 78, **133**–**140**, 237, 259, 312, 313, 523, 551, 552
arguments of, 135
optional, 135
breaking lines in, 135
column-formatting in, 136
horizontal lines in, 135, 137
intercolumn space in, 136
`\parbox` in, 111
rules for, 135
vertical lines in, 135
width of columns in, 136
`tabularx` (pack.), 313
`\tag`, 29, **201**, 202, 211, 213, 215, 218, 230, 231
`\tag*`, 202
tags (names for equations), 29, **201**–**204**, 211, 213, 215, 218, 230, 231
top-or-bottom placement of, 298
`\tan` (tan math op.), *172*, *510*
`\tanh` (tanh math op.), *172*, *510*
Tantau, Till, 325, 359, 552, 560
`\tau` (τ Greek char.), *502*
`\tbinom` (inline-style binomial com.), 160
`tbtags` (doc. class opt.), **298**
technical reports, in BibTeX database files, 434–435
technical support
on the Internet, 542
provided by TeX users groups, 541
provided by the AMS, 542
`TECHREPORT` (bibl. entry type), 425, **434**–**435**
`template.bib` (sample bibl. file), 423, 437, 446
templates, 271, 306
bibliographical, 47, 261, 423, 437, 446
customizing
for AMS document classes, 294–297
for articles, 44–45
`ggamsart.tpl`, 297
`myams.tpl`, 294–297
personalized
making read-only, 297

terminating
captions, 476
commands, 14, 19, **69**, 70, 80, 147, **154**
environments, **68**
fields in BibTeX database entries, 445
files, 392, **478**
lines, 85, 159, 367
paragraphs, **64**, 99
sentences, 11, **64–67**, 279
TeX, 521, 525
commands, 378, 380
to avoid using, 481
commands in LaTeX, 482
distribution, 528
extensibility of, 525
files, portability of, 9
history of, 521–525
implementations, 489
inner workings of, 528
inputs folders, 540, 544–545
layers of, 528–529
omissions in discussion of, 552
Plain, 528
programming in, 525, 553
resources on the Internet, 542
source files, *see under* source files
structure of, 528
users groups, *see* TeX users groups *and* TUG
`tex` (LaTeX distr. directory), 499
`\TeX` (TeX com.), 80
TeX users groups, *see also* TUG, 537–542, 547
international, 541
`tex4ht` (opt. of `hyperref` pack.), 320
TeX Live (TUG DVD/CD), xxvi, 489, 490, 495, 541
`texmf` (LaTeX distr. directory), 499
`TeXShop` (LaTeX front end for Mac), xxvi, 9, 11, 53, 326, 496
customizing, 496
productivity tools in, 498
with BibTeX, 442
with *MakeIndex*, 461
text, 7
accents, 69, *79*, *516*
\\ in, 98
blocks, width of, 270
boxes, *see* text boxes
centering, *see* centering text, `center` (text align. env.), *and* `\centering`
editors, xxvi, 4, 5, 9, 18, 48, 55, 63, 84, 88, 365, 490, 526
framing, 109
in math mode, 19, **27**, 83, 99, 107, 154, **162–163**, 181, 196, 226–227, 241, 301
specifying fonts for, 163
in tables
multicolumn, 137–140
multiline, 138
mode, 7
plain, 9
spacing in, **102–106**
style commands, *see* text style commands
symbols, *see* text symbols
typing, 7–15, 61–115
user-defined commands for, 366
using math symbols in, 365
white space in, 102–106
`\text` (box com.), xxvi, 27, 33, 83, 99, **107**, 162–163, 181, 206, 241, 301
spacing rules in, 154
text boxes, 107–115
alignment of contents in, 107, 111
behave as single characters, 107
commands for
`\framebox`, 109
`\makebox`, **107**, 108, 109, 111, 113
`\mbox`, xxvi, 107
`\parbox`, 107, 109, **110, 111**, 138, 405
`\raisebox`, 115
`\rule`, 113, 114, 140
`\text`, xxvi, 27, 33, 83, 99, **107**, 154, 162–163, 181, 206, 241, 301
environments for `minipage`, 107, 109, 112, 383, 384
framed, **109–110**
measurements of, *405*
measuring, *see* measurements
single line, 107–109, 163
vertical alignment of, 111, 115
text environments, 117–149
and stretchable vertical space, 406
blank lines in, 118
displayed, *see* displayed text environments
for abstracts, *see* `abstract`
for alignment, **8**, 68, 106, **124**, 134, 227, 407, 414
for bibliographies, *see* `thebibliography`
for boxes, *see under* text boxes
for comments, *see* `comment`
for documents, *see* `document`
for figures, *see* figures

for indexes, *see* `theindex`
for letters, *see* `letter`
for lists, *see* list text environments
for proofs, *see* `proof`
for styles, *see under* text style
for tables, *see* tables
rules for, 118
text mode, **62**
text style commands
avoiding direct use of, 480
`\emph`, 8, 14, 68, *90*, **91**, 337, *516*
`\textbf`, 14, 73, *90*, **93**, 163, 301, 337, *516*
`\textit`, *90*, **91**, *337*, *516*
`\textmd`, *90*, **93**, *516*
`\textnormal`, **90**, *90*, 163, *516*
`\textrm`, *90*, 301, *516*
`\textsc`, *90*, **91**, *516*
`\textsf`, *90*, *516*
`\textsl`, *90*, **91**, *516*
`\texttt`, 14, 76, *90*, *516*
`\textup`, *90*, **91**, *516*
text style environments
`bfseries`, 123
`em`, 123
`itshape`, 123
`rmfamily`, 123
`scshape`, 123
`sffamily`, 123
`slshape`, 123
`ttfamily`, 123
`upshape`, 123
text symbols, 77, *81*
commands, 76, 77, 80, 278, *516*, *518*, *519*
typing, 74–80
`\textasciicircum` (^ circumflex), *81*, *518*
`\textasciitilde` (~ tilde), *519*
`\textasteriskcentered` (* asterisk), 77, *81*, *518*
`\textbackslash` (\ backslash), **76**–**77**, *81*, *518*
`\textbar` (| vertical bar), **77**, *81*, *518*
`\textbf` (font weight com.), 14, 73, *90*, **93**, 163, 301, 337, *516*
`\textbullet` (• bullet), *81*, *518*
`\textcircled` (ⓐ), **80**, *81*, *518*
`\textcolor` (`beamer` com.), 349
`\textcompwordmark` (lig.-suppr. com.), **79**, 365, 415
`\textemdash` (— em dash), *81*, *518*
`\textendash` (– em dash), *81*, *518*
`\textexclamdown` (¡ exclamation mark), 62
`\textgreater` (> greater than), *81*, *518*
`\textit` (font shape com.), *90*, **91**, *337*, *516*
`\textless` (< less than), *81*, *518*
`\textmd` (font weight com.), *90*, **93**, *516*
`\textnormal` (font shape com.), **90**, *90*, 163, *516*
`\TextOrMath` (text and math mode com.), 311
`\textperiodcentered` (· midpoint), *81*, *518*
`\textquestiondown` (¿ question mark), *81*, *518*
`\textquotedbl` (Eur. quot. mark), *519*
`\textquotedblleft` (“ left double quote), *81*, *518*
`\textquotedblright` (” right double quote), *81*, *518*
`\textquoteleft` (‘ left single quote), *519*
`\textquoteright` (’)
Eur. quot. mark, *519*
right single quote, *519*
`\textregistered` (® registered trademark), *81*, *518*
`\textrm` (font shape com.), *90*, 301, *516*
`\textsc` (font shape com.), *90*, **91**, *516*
`\textsf` (font shape com.), *90*, *516*
`\textsl` (font shape com.), *90*, **91**, *516*
`\textstyle` (math font size com.), **199**, 204
`\textsubscript`, 251, 311
`\textsuperscript` (^{a}), 311, *519*
`\texttrademark` (^{TM} trademark), *519*
`\texttt` (font shape com.), 14, 76, *90*, *516*
`\textup` (font shape com.), *90*, **91**, *516*
`textures` (opt. of `hyperref` pack.), 320
`\textvisiblespace`, 11, 63, **64**, *519*
`\textwidth` (length com.), 270, 398, **404**
`tfm` (LaTeX font metric file), 529
`\tfrac` ($\frac{x}{y}$), 158, 200
`\TH` (Thorn Eur. char.), *519*
`\th` (thorn Eur. char.), *519*
`\thanks` (top matter com.), **44**, 87, 279, 281, 296, 304
`\the` (value expansion com.), **80**, 87, 113, 400
`thebibliography` (bibliography env.), 40, 47–48, 66, **261**–**267**, 407, 437, 446
argument of, 263, 266
in `bbl` files, 442
`\thechapter` (the value of counter `chapter`), 401
`\thefootnote` (the value of counter `footnote`), 87, 88

`theindex` (index env.), **267**, 407, **449**, 459
  commands in, 267, 449
`themes` (`beamer` distr. directory), 356
themes, for `beamer` presentations, 328, **356–357**
  `Berkeley`, 328, 331, *332*, 356
  color options, 357
  `Warsaw`, 331, *332*, 356
`theorem` (proclamation env.), 37, 52, 54, 125, 128, 343, 384
  body of, 46
  logical design of, 52
  visual design of, 52
`theorem` (pack.), 313
theorem-like structures, *see* proclamations
`\theoremname` (`hyperref` redef. name), *323*
`\theoremstyle*` (procl. com.), 37, 129–131
`\theoremstyle` (procl. com.), 129–131
`\theparentequation` (the value of counter `parentequation`), 401
`\therefore` (∴ binary rel.), *504*
`\thesection` (the value of counter `section`), 401
theses, in BibTeX database files, 433–434
`\thesubsection` (the value of counter `subsection`), 401
`\Theta` (Θ Greek char.), *502*
`\theta` (θ Greek char.), *502*
`\thickapprox` (≈ binary rel.), *504*
`\thicksim` (∼ binary rel.), *504*
`\thickspace` (spacing com.), *190*, *513*, *520*
`\thinspace` (spacing com.), 25, 67, 75, 188, 190, *190*, *513*, *520*
third-party packages, *see* specific packages
`\thispagestyle` (set page style), 270
thorn (Eur. char), *519*
Thorup, Kresten K., 403
tie (˜ spacing com.), **11**, 28, 63, 66, 75, **76**, 99, *520*
  absorbs spaces, 76
  in BibTeX databases, 427
  with cross-references, 28, 257
tie (͡ text accent), *79*, *516*
TikZ, 552
tilde (˜)
  text accent, *79*, *516*
  text symbol, *519*
`\tilde` ($\tilde{x}$ math accent), 25, *177*, *512*
`\time` (time com.), 80
time commands
  `\date`, 44
  `\day`, 80
  `\month`, 80
  `\time`, 80
  `\today`, **14**, 44, 70–71, 80, 148, 275, 304, 380, 548
  `\year`, 80
Times, in LaTeX documents, 544–545
`\times` (× math op.), 23, **158**, *506*
`times` (pack.), 544
`times.sty` (PSNFSS distr. file), 544
`\Tiny` (font size com.), **93**, *93*, *517*
`\tiny` (font size com.), **93**, *93*, *517*
`\title` (top matter com.), 37, 44, 106, 249, 297, 304, 331, 469
  optional arguments of, 273, 274, 282, 297
`title` (BibTeX database field), 424–426, 433
title pages, 273, 535
  commands for, 54
  document class options for, 249, 299, 300, 307
  environments for, 469
  footnotes on, 87
  of articles, 37, 249, 251
  of books, 467, 469
  of presentations, 55
`titlepage` (doc. class opt.), 249, **299**, 307, 468
`\titlepage` (`beamer` com.), 328
`titlepage` (front matter env.), 469
titles
  in bibliographies
    rules for typing, 426–427
  in running heads, 274, 297
  of articles, **44**, **273**, 297
  of structural commands, 252
    fragile commands in, 74
`\to` (→ math arrow), *507*
`toc` (table of contents files), 473–475, 487, 532
  commands in, 475
`tocdepth` (counter), 403, 473
`\today` (time com.), **14**, 44, 70–71, 80, 148, 275, 304, 380, 548
tokens, 529
`tools` (LaTeX distr. directory), 311–313
  packages in, 312–313
`tools` (pack.), 312
`\top` (⊤ math sym.), *508*
top matter, *36*, **37–38**, 249, **251**, 272
  article information, 37–38, 44–46
    of AMS documents, 273–275

commands, 37, 44, 46, 80, 87, 106, 270, 273, **273–281**, 282, 284, 285, 296, 297, 331, 469
blank lines in, 273
examples of, 282–285
with multiple authors, 281
customizing templates, 44, 294
editing, 44–46
is document-class specific, 251
of AMS documents, 273–285
AMS information, 279–281
author information, 275–279
errors with, 284–285
examples, 282–285
with multiple authors, 281
of books, 251
of presentations, 53–55, 326–327, 331
with multiple authors, 46
top-or-bottom, placement of tags, 298
`topmat.tpl` (sample file), 282
`\topsep` (length com.), **407**, 408
`\totalheight` (length com.), 108, **108**, 110, 111
`trace` (pack.), 313
trademark text symbols (™ ®), *81*, *518, 519*
`trans` (`beamer` doc. class opt.), 358
translation, of line ending characters, 63
`\translator` (top matter com.), 274
`\triangle` (△ math sym.), *508*
`\triangledown` (▽ math sym.), *508*
`\triangleleft` (◁ math op.), *506*
`\trianglelefteq` (⊴ binary rel.), *504*
`\triangleq` (≜ binary rel.), *504*
`\triangleright` (▷ math op.), *506*
`\trianglerighteq` (⊵ binary rel.), *504*
`trivlist` (list text env.), 414
`\tt` (obs. LaTeX 2.09 font com.), 94
`\ttfamily` (font shape com. dec.), *90*, 123, 142, *516*
`ttfamily` (font shape env.), 123
TUG (TeX Users Group), 489, 490, 495, 537, 541–542
TUGboat, 541, 553
two-letter font commands, *see under* font commands
`twocolumn` (doc. class opt.), 85, 101, 259, **299**, 307, 308
and footnotes, 313
`\twocolumn` (double-column com.), 101
`\twoheadleftarrow` (↞ math arrow), *507*
`\twoheadrightarrow` (↠ math arrow), *507*
`twoside` (doc. class opt.), 85, 249, **299**, 307, 308, 468
`type` (BibTeX database field), 425
type foundries, 544, *546*
types
of commands, 73–74
of math symbols, **188**, 198
declaring, 195
typeset
example articles
`intrart.tex`, 41–43
`sampart.tex`, 285–288
files, 5, *5*, 271, 443
DVI format, 318, 530
PDF format, 5, 259, 318, 326, 530
typesetting
indexes, 459–461
source files, **4**, 9, 12, 20, 28, 63, 74, 534
tables of contents, 473–475
with LaTeX, **522**, 526, *527*, 529–534
typewriter style
document font family, **89**
font shape, 14, 76, 78, *90*, **123**, 142, 365, *516*, 544
fonts, 88
in math, **196**, *196*, *512*
typing
bibliographic entries, 426–437
accents in, 427
names in, 426
rules for, 443–446
titles in, 426–427
books, 465–487
exercises, 476
footnotes, 87–88
math, 17–33, 151–206
poetry, 144–145
programs, 141–143, 145–147
quotations, 143–144
text, 7–15, 61–115
symbols, 74–80
typographical
errors, 48
rules for
abbreviations and acronyms, 91
initials, 67

U

`\u` breve text accent (˘), *79*, *516*
UK TUG (United Kingdom TeX Users Group), 541
Frequently Asked Questions (FAQ), 542
`\ulcorner` (⌜ math delimiter), *167*, *509*
Umeki, Hideo, 270

umlaut (¨ text accent), 9, 15, *79*, *516*, 548
unbreakable
  hyphens, 83
  spaces (~ tie), **11**, 28, 63, 66, 75, **76**, 99, *520*
    absorb spaces, 76
    in BibTeX databases, 427
    with cross-references, 257
\underbrace (math sym.), 178
  with a subscript, 178
underdot text accent (̣), *79*, *516*
\underleftarrow ($\underleftarrow{x}$ math arrow), 179
\underleftrightarrow ($\underleftrightarrow{x}$ math arrow), 179
\underline ($\underline{x}$ math line sym.), 179
\underrightarrow ($\underrightarrow{x}$ math arrow), 179
underscore (_), *77*
  text symbol, *81*, *518*
    in e-mail addresses, 278
underscore text accent (̲), *79*, *516*
\underset (symbol-building com.), 183, **192**
Unicode, 554
units
  absolute, *see under* absolute
  dimensional, *see under* dimensional units
  logical, *see under* logical
  math, *see* mu
  relative, *see under* relative
UNIX, 3, 9, 522, 554
  FTP clients, 538
  LaTeX implementations, 3, 442, 461, 489
  line ending characters, 9
\unlhd ($\trianglelefteq$ math op.), *506*
unmarked footnotes, 44, 279
unnumbered
  environments, 215
  equations, 30, 31, 157, 201, 202, 210, 211, 213, 215, 218, 231, 328
  items, 119
  math environments, 211
  proclamations, 129, 130, 382
  structural units, 46, 253, 467
unpacked (LaTeX distr. directory), 311, 540
UNPUBLISHED (bibl. entry type), **435**
\unrhd ($\trianglerighteq$ math op.), *506*
\Uparrow ($\Uparrow$)
  math arrow, *507*
  math delimiter, *167*, *509*
\uparrow ($\uparrow$)
  math arrow, *507*
  math delimiter, *167*, *509*
updates
  to AMSFonts and packages, 533
  to LaTeX, 532
\Updownarrow ($\Updownarrow$)
  math arrow, *507*
  math delimiter, *167*, *509*
\updownarrow ($\updownarrow$)
  math arrow, *507*
  math delimiter, *167*, *509*
\upharpoonleft ($\upharpoonleft$ math arrow), *507*
\upharpoonright ($\upharpoonright$ math arrow), *507*
\uplus ($\uplus$ math op.), *506*
\upn (font shape com.), 156
uppercase counter styles
  letters (\alph), *401*
  roman numerals (\roman), *401*
upref (pack.), 300, 301
upright (font shape), 28, 88, 89, *90*, **91**, **123**, 156, 382, 412, *516*
  context dependence of, 91
\uproot (root-adjustment com.), 162
\upshape (font shape com. dec.), *90*, **91**, 123, 382, 412, *516*
upshape (font shape env.), 123
\Upsilon (Υ Greek char.), *502*
\upsilon (υ Greek char.), *502*
\upuparrows ($\upuparrows$ math arrow), *507*
\urcorner (⌝ math delimiter), *167*, *509*
\URL (bibl. com.), 425
URL (Uniform Resource Locator), 278, *see also* hyperlinks
\urladdr (top matter com.), **278**, 279, 296, 323
\usecolortheme (beamer com.), 357
\usecounter (list counter com.), 411
\usefonttheme (beamer com.), 357
\usepackage (preamble com.), 35, 53, 70, 249, 294, 320, 326, 366, 386, 450, 534
  can load multiple packages, 250
user-defined commands, 36, **364**–**380**, 480
  arguments of, 370–374
  as shorthand, 364–374
  as tokens, 529
  command declarations in, 90
    scope of, **367**–**368**, 382
  defining, 87, 99, 132, 139, 266, 267, 364, 366, 373–375, 400
    in preamble, 250
  delimited, 378–380
  for environments, 365
  for indexing, 371, 454
  for subformulas, 371–373

for text, 366
invoking, 366
multiple arguments of, 70
optional arguments of, 374
rules, 366, 367
short arguments, 373–374
with `\def`, 378
user-defined environments, **380**–**385**, 479, 482, 529
defining, 381
for custom lists, 406–415
optional arguments of, 384
short arguments, 385
users groups, 537, 539, **541**–**542**, 547
international, 541
`\usetheme` (`beamer` com.), 328, 356
UNIX, 479

V

`\v` caron text accent (ˇ), *79*, *516*
`\value` (value of counter), 402
values, of counters, 87, 402
printing, **80**, 113, 400
van Oostrum, Piet, 270, 537
`\varDelta` ($\varDelta$ Greek char.), *502*
`\varepsilon` (ε Greek char.), *502*
`\varGamma` ($\varGamma$ Greek char.), *502*
`\varinjlim` ($\varinjlim$ math op.), *172*, *510*
`varioref` (pack.), 258, 313
`\varkappa` ($\varkappa$ Greek char.), *502*
`\varLambda` ($\varLambda$ Greek char.), *502*
`\varliminf` ($\varliminf$ math op.), *172*, *510*
`\varlimsup` ($\varlimsup$ math op.), *172*
`\varnothing` ($\varnothing$ math sym.), *508*
`\varOmega` ($\varOmega$ Greek char.), *502*
`\varPhi` ($\varPhi$ Greek char.), *502*
`\varphi` (φ Greek char.), *502*
`\varPi` ($\varPi$ Greek char.), *502*
`\varpi` (ϖ Greek char.), *502*
`\varprojlim` ($\varprojlim$ math op.), *172*, *510*
`\varpropto` ($\varpropto$ binary rel.), *504*
`\varPsi` ($\varPsi$ Greek char.), *502*
`\varrho` (ϱ Greek char.), *502*
`\varSigma` ($\varSigma$ Greek char.), *502*
`\varsigma` (ς Greek char.), *502*
`\varsubsetneq` ($\varsubsetneq$ neg. binary rel.), *505*
`\varsubsetneqq` ($\varsubsetneqq$ neg. binary rel.), *505*
`\varsupsetneq` ($\varsupsetneq$ binary rel.), *505*
`\varsupsetneqq` ($\varsupsetneqq$ binary rel.), *505*
`\varTheta` ($\varTheta$ Greek char.), *502*
`\vartheta` (ϑ Greek char.), *502*
`\vartriangle` ($\vartriangle$ math op.), *506*
`\vartriangleleft` ($\vartriangleleft$ math op.), *506*
`\vartriangleright` ($\vartriangleright$ math op.), *506*
`\varUpsilon` ($\varUpsilon$ Greek char.), *502*
`\varXi` ($\varXi$ Greek char.), *502*
`\Vdash` ($\Vdash$ binary rel.), *504*
`\vDash` ($\vDash$ binary rel.), *504*
`\vdash` ($\vdash$ binary rel.), *503*
`\vdots` (vertical ellipsis), 161, 235
`\vec` ($\vec{x}$ math accent), 25, *177*, 377, *512*
`\vee` ($\vee$ math op.), *506*
`\veebar` ($\veebar$ math op.), *506*
`\verb` (inline verbatim com.), 147–149
in aligned math environments, 148
in argument of other commands, 148
spaces in, 148
`\verb*` (inline verbatim com.), 148
delimiters with, 147–149
`verbatim` (disp. text env.), **145**–**147**, 313, 359, 523
blank lines in, 146
characters following, 146
simulating with `\verb`, 148
`verbatim` (pack.), 86, 87, 147, 313, 387
`verse` (disp. text env.), **144**, 407
breaking lines in, 145
versions
of AMS packages and AMSFonts, 300, 301, 524, 525, 533
of LaTeX packages, 532–534
`\Vert` ($\Vert$ math delimiter), *167*, *509*
`\vert` ($\vert$ math delimiter), *167*, *509*
vertical
alignment, of boxes, 111, 115
bar (| text symbol), *81*, *518*
ellipses, 161, 235
glue, 530
lines
in `CD` environments, 241
in `tabular` environments, 135
math arrows, 241
vertical spacing
adding after `\\`, 15
adding to table of contents, 474
adjusting, 56
with `\arraystretch`, 139
with struts, 139
adjusting with the `setspace` package, 99
between marginal notes, 404
between paragraphs, 404
commands
`\bigskip`, **104**
`\enlargethispage`, **101**, 484, 487
`\medskip`, **104**
`\smallskip`, **104**
`\smash`, 115, 201, **201**
to avoid using, 481

vertical spacing
commands (*continued*)
`\vfill` (fill com.), 106
`\vphantom`, 105
`\vspace`, 104
`\vspace*`, 105
in boxes, 115
in indexes, 267, 449
in math mode, 200–201
in text, 15, **104**–**105**, 377, 474, 482, 486
preventing removal of, 105
stretchable, 406
using the `setspace` package, 99
`\vfill` (space fill com.), 106
viewers
DVI, 526, 530, 539
PDF, *see under* PDF
viewing typeset files, 494, 530
DVI format, 318, 530
PDF format, 5, 259, 318, 530
`virtex` (TEX program), 528
visible spaces (␣), 11, 63
and `\verb*` command, 148
Visual
Guide, to multiline math formulas, **207**
visual
design, 52–53, 247, 268–270, 358
markup, 535
guide, to multiline math formulas, *208*
`Vmatrix` (subsid. math env.), 183, **235**
`vmatrix` (subsid. math env.), 25, 26, **235**
`volume` (BIBTEX database field), 424, 425
von, in bibliographic entries, 426
`\vphantom` (spacing com.), 105
`\vspace` (spacing com.), 104
`\vspace*` (spacing com.), 105
`vtex` (opt. of `hyperref` pack.), 320
`\Vvdash` (⊪ binary rel.), *504*

W

warning messages, *see also* error messages
about hyphenation, 96
`Abstract should precede \maketitle in AMS document classes`, 251
`Characters dropped after \end{verbatim}`, 146
`\end occurred inside a group at level` *x*, 72
`\end occurred when \`*xxx* `on line` *yy* `was incomplete`, 478
generated by overlapping braces, 72
`Label(s) may have changed`, 256
line numbers in, 12
lines are too wide, 12–13, 96–97
`No auxiliary output files`, 531
`Overfull \hbox`, **12**–**13**, 96–97, 530
suppressing, 96
recorded in `log` file, 96, **526**
regarding font substitution, 94
`Rerun to get cross-references right`, 256
`Underfull \vbox has occurred while \output is active`, 530
`Warning--missing` *field* `in` *label*, 444–446
when using `\NeedsTeXFormat`, 250, 386, 532
with BIBTEX, 443–446
in `log` (`blg`) files, 442
`Warsaw` (`beamer` theme), 331, *332*, 356
Web, *see* Internet
`\wedge` (∧ math op.), *506*
weight, of fonts, *see under* font environments, font commands *and* font declarations
white space
adjusting, 482
and binary operations and relations, 155
between marginal notes, 404
between paragraphs, 404
commands, avoiding direct use of, 481
detemined by document classes, 102
horizontal, 68, 102, 105, 142, 154, 189–191, 224, 225, 313, 368–369, *513*, *520*
in math mode, 186, 233, 236
in text mode, 11, 19, **64**–**67**, **102**–**104**, **106**, 114, 126, 414
in arguments of commands, 85
in command definitions, 367
in command names, 68
in delimited commands, 379–380
in math, 19, 51, 104–105, 154–156, 187–192, 200–201
adjusting, 104
in source files, 154
in `tabular` environments, 135
in text, 11, **102**–**106**, 383, 427, *513*, *520*
in `\verb` commands, 148
in `verbatim` environments, 146
suppressing, 383, 458
terminating commands with, 69

vertical, 102
adding to table of contents, 474
adjusting, 481
in math mode, 104–105, 200–201
in text mode, 15, 101, **104**–**106**, 201, 377, 482, 486
`\widehat` ($\widehat{x}$ math accent), **177**, *177*, 184, *512*
`\widetilde` ($\widetilde{x}$ math accent), **177**, *177*, *512*
width
of columns in `tabular` environments, 136
of fonts, *see* font width
of text blocks, 270, 398, 404
of text boxes, 107–109, *405*
`\width` (length com.), 108, **108**, 111
Windows, *see also* PCs, *see under* Microsoft
`WinEdt` (LaTeX front end for PC), xxvi, 9, 11, 53, 490, 491, *492*
installation, 490–491
productivity tools in, 494
with BibTeX, 442
with *MakeIndex*, 461
word processors, 11
words, are separated by spaces, 82
`work` (folder), **4**, 10, 12, 14, 18, 20, 35, 39, 53, 164, 294, 320, 326–328, 331, 343, 438, 491
creating, 4
World Wide Web, *see* Internet
`\wp` ($\wp$ math sym.), *508*
`\wr` ($\wr$ math op.), *506*
wrapping, of lines
by e-mail clients, 65
wrapping, of lines by text editors, 84

X

`xcb` (exercise env.), 476
`xcolor` (pack.), 325, 348
options, 349
`\Xi` (Ξ Greek char.), *502*
`\xi` (ξ Greek char.), *502*
`\xleftarrow` (stretchable math arrow), 179
`xr` (pack.), 258, 313
`\xrightarrow` (stretchable math arrow), 179
`xspace` (pack.), 313, 368–369
`xy-pic` (pack.), 242

Y

Y&Y, 525, 543
`\year` (time com.), 80
`year` (BibTeX database field), 424, 425

X

zero, specifying in arguments, 114
`\zeta` (ζ Greek char.), *502*

`\` (backslash), 167, 518
key, 9, 76
starts commands, 8, 14, **68**
text symbol, 76–77, *81*, *509*
␣ (space), 11, 63, **64**
and `\verb*` command, 148
in arguments of commands, 85
in `\bibitem` labels, 266
in `\cite` commands, 264
in command names, 68
in `tabular` environments, 135
text symbol, *519*
`\␣` (space com.), 11, **66**, 70, 102, *190*, *520*
`!` (exclamation mark), 9, 62
float control, **260**, 486
in `\index` commands, 453, 454, 457
¡ (exclamation mark, Spanish), *81*, *515*, *518*
`\!` (negthinspace), *182*, **190**, *190*, *513*, *520*
`\"` (¨ dieresis/umlaut text accent), 9, 15, *79*, *516*, 548
`"` (double quote), 9, **75**
in BibTeX database fields, **424**, 445, 446
in `\index` commands, 457
key, 9, 63, 75
`"ck` (European character), 548
`"s` (eszett), 548
`#`
in user-defined commands, 371, 378
key, 9, 63
`\#` (# octothorp), *77*, *81*, *518*
`$`
as inline math delimiter, 17, 18, 33, 72, 74, **152**
act as braces, 152
must be balanced, 153
in error messages, 20, 51, 147, 153, 154, 157, 233
key, 9, 63
`\$` ($ dollar sign), **9**, *77*, *81*, *518*
`$$`
in error messages, 51
TeX displayed math delimiter, 152

% as comment character, 6, 10, 19, 21, 61, **85**–**86**, 141, 294, 458
in BibTeX databases, 86, 443
key, 9, 63
\% (% percent), **9**, 61, *77*, *81*, 86, *518*
in e-mail addresses, 278
& as alignment point, 30, 31, 216, 218, 220, 221
as column separator, 25, 135, 220, 221, 231, 236
key, 9, 63
\& (& ampersand), *77*, *81*, *518*
&&, alignment point for annotations, 32
’ (right single quote), 9, 11, 62, **75**, *519*
for primes (′), 23, 159, 194
\’ (´ acute text accent), *79*, *516*
\((start inline math mode), 18, 74
acts as special brace, 152, 153
must be balanced, 153
(as math delimiter (( ), *167*, *509*
in index entries, 455
key, 8, 62
\) (end inline math mode), 18, 74
acts as special brace, 152, 153
must be balanced, 153
) as math delimiter ( )), *167*, *509*
in index entries, 455
key, 8, 62
* (* asterisk), 77
interactive prompt, **113**, 376–378, **534**
key, 8, 63
** prompt, 534
*-form
of commands, 46, **69**, 98, 101, 103, 105, 129, 130, 148, 173, 195, 196, 242, 253, 322, 373, 382, 385, 439, 467, 473
of environments, 157, 201, 211, 213, 215, 231, 259
+ key, 8, 63
+ (plus), 22, 63, 157, 188, 191, 192, 213, 216–218
as binary operation, *506*
+ and − rule, **188**, 191, 192, 217, 218
and subformulas, 216
in multline environments, 213
\, (thinspace), 25, 67, 75, 188, 190, *190*, *513*, *520*
, (comma), 9, 62
and italic correction, 92
in \bibitem commands, 266
in BibTeX databases, 424, 425, 445
use in formulas, 155
- (dash, hyphen, minus), 9, 22, 63, 75, 76, 157, 188, 191, 192, 196, 216, 217
as binary operation, *506*
in \hyphenation commands, 82
\- (opt. hyphen), 13, 82, **82**, 96
-- (– number ranges, en dash), **14**, **75**, *81*, *518*
in BibTeX databases, 427
--- (— em dash), **14**, **75**, *81*, *518*
. (period), 9, 62
and italic correction, 92
in BibTeX databases, 426
\. overdot text accent (˙), *79*, *516*
\/ (italic correction), **91**–**93**, *520*
and font commands, 92
/ (slash)
as divisor, 22, 63, 157
as math delimiter (/), *167*, *509*
key, 8
\: (medspace spacing com.), *190*, *513*, *520*
: (colon), 9, 62
as binary relation, 63, 191, *503*
\; (thickspace), *190*, *513*, *520*
; (semicolon), 9, 62
< (less than)
as binary relation (<), *503*
key, 17, 63
text symbol, *81*, *518*
\=
macron text accent (¯), *79*, *516*
tab set command, 141
= (equal sign)
as binary relation (=), *503*
in BibTeX database fields, 424
key, 8, 63
\> (tabbing com.), 141, 142
> (greater than)
as binary relation (>), *503*
key, 17, 63
text symbol, *81*, *518*
?
prompt, 20, 48, 491, 534
question mark, 9, 62
¿ (Spanish question mark), *81*, *515*, *518*
@ (@ at sign), 9, 63, **77**
in BibTeX database (bib) files, 424
in \index commands, 455, 456
@-expression, 136
@. (blank math symbol for comm. diagrams), 240, 241
\@. (intersentence space), 67, *520*

`@<<<` (stretchable left arrow math sym.), 240
`@=` (stretchable equals sign math sym.), 240
`@>>>` (stretchable right arrow math sym.), 240
`@AAA` (stretchable up arrow math sym.), 241
`@VVV` (stretchable down arrow math sym.), 241
`@\vert` (stretchable double vertical line), 241
`\[` (start displayed math mode), 18, **152**, **155**
  acts as special brace, 152, 157
`[`
  and optional arguments, **15**, 27, **69, 70**, 128, 132, 135
  key, 8, 62
  math delimiter ([ ), *167*, *509*
  with `\item` commands, 122
  with `\newcommand`, 370
`\]` (end displayed math mode), 18, **152**, **155**
  acts as special brace, 152, 157
`]`
  and optional arguments, **15**, 27, **69, 70**, 128, 132, 135
  key, 8, 62
  math delimiter ( ]), *167*, *509*
  with `\item` commands, 122
  with `\newcommand`, 370
`{`
  for required arguments, 8, 14, 19, **69**, 70, 159, 366, 530
  for scoping, 71–73
  in BibTeX entries, 424, 427
  key, 9, 63
  must be balanced, 21, 72, 77
    in `\index` commands, 462
  with `\def`, 378
`\{`
  as math delimiter ({), *167*, *509*
  text brace ({), *77*, *81*, *518*
`}`
  for required arguments, 8, 14, 19, **69**, 70, 159, 366, 530
  for scoping, 71–73
  in BibTeX entries, 424, 427
  key, 9, 63
  must be balanced, 21, 72, 77
    in `\index` commands, 462
  with `\def`, 378
`\}`
  as math delimiter (}), *167*, *509*
  text brace (}), *77*, *81*, *518*
`^` (caret)
  for superscripts, **23**, 25, **158–159**, 161, 182
  key, 9, 63, 77
`\^` circumflex text accent (^), *79*, *81*, *516*, *518*
`\_` (_ underscore), **9**, *77*, *81*, *518*
  in e-mail addresses, 278
`_` (underscore)
  for subscripts, **23**, 25, **158–159**, 161, 178, 182
  key, 9, 63
`‘` (left single quote), 9, 11, 62, **75**, *519*
`\‘` (` grave text accent), 62, *79*, *516*
`\|` (|| math delimiter), 166, *167*, 168, 185, *509*
`|` (| vertical line), 9, 17, 63, 77, 168, 189
  as binary relation, 188, 189
  as math delimiter, *167*, 170, 189, 191, *509*
  in `\index` commands, 454, 457
  in `tabular` environments, 135
`~` (tilde)
  key, 9, 11, 63
  tie/unbreakable space, **11**, 28, 63, 66, 75, **76**, 99, *520*
    absorbs spaces, 76
    in BibTeX databases, 427
    with cross-references, 28, 257
`\~` (~ tilde text accent), *77*, *79*, *516*, *519*

`9pt` (doc. class option), **297**
`10pt` (doc. class option), **104**, **297**, **306**
`11pt` (doc. class option), **297**, **306**
`12pt` (doc. class option), **93**, **297**, **306**

`\\` (new line), **15**, **97, 98**
  and `\kill` commands, 142
  breaking lines with, 25, 30, 31, 33, 44, 46, 98, 124, 135, 141, 142, 145, 176, 211, 213, 215, 216, 227, 231, 242, 273–278, 297, 304, 309, 358
  in arguments of commands, **98**
  in environments, **98**, 124, 145
  in text, 98
  optional argument of, **15**, 98, **98**, 242
`\\*` (new line), **98**, 242